

Design of compact wideband unequal wilkinson power divider with improved isolation

V. Ravi^{1*}, Dinesh Sharma⁵, Purnima K⁴, Praveen Vummadisetty. Naidu¹, A. Ravi Raja¹, Arvind Kumar², Abhaya P. Singh³, P. Raveendra¹

¹Velagapudi Ramakrishna Siddhartha Engineering College, Vijayawada, India-520007

²K.I.T.E, Jaipur, India-302022, ³Symbiosis International University, Pune, India

⁴Sri Vasavi Engineering College, Tadepalligudem, Andhra Pradesh 534101, India

⁵Chandigarh College of Engineering & Technology (CCET), Chandigarh, -160019 India

*Corresponding author E-mail: ravi.vanamadi@gmail.com

Abstract

In this article, a compact unequal, planar Wilkinson power divider with ultra-wideband operation is proposed. The composed power divider having the size of 11.6 mm × 18.5 mm. It consists of one input and two output branches with individual resistive values. Two isolation resistors are used to provide better isolation between the two output ports. The impedance values of each transmission branch and isolation resistors is varied based on the output power division ratio i.e. (P₂/P₃). The ADS package simulated results of the designed unequal WPD satisfy the operating range (S₁₁ ≤ -10 dB) from 2.5 GHz to 18 GHz and isolation are obtained over the entire frequency of operation.

Keywords: ADS; EW Applications; Isolation Bandwidth; Micro strip Line; Phased Array Antennas; Unequal Wilkinson Power Divider

1. Introduction

Recently, many printed antennas [8-18], [21-37] and Phase Array Antennas (PAA) [19-20] have been reported for wireless communication applications. In case of PAA power dividers plays a major role and the essential principle of the power divider or power splitter is to separate the given input signal at the input port into two or more output signals at the respective output ports with equal or unequal power distribution over the operating frequency range. Depending upon the range of operation and splitting ratio of input signal (equal or unequal) various power dividers [1-7] are used in RF Communication devices. A distinct unequal, planar, wideband, ultra-wideband power dividers has been presented in the literature with their own frequency operation and structure [1-7]. A typical Wilkinson power divider is presented and designing discussed in [1]. A specific set of equations are proposed by Ernest J. Wilkinson in 1960 [1]. Two types of commonly used power dividers are discussed in [1], one is corporate feed structure and another one is circularly symmetry connection. A three port microstrip unequal 4:1 Wilkinson power divider presented in [2]. The designed power divider works over the entire frequency range from 1.2 GHz to 1.8 GHz. A 2way (output) planar unequal power divider with division ratio of (5:1) is presented in [3]. It is printed on the substrate of thickness 0.8 mm and relative permittivity 9.6. The simulated and measured results show the operating range starts from 1GHz up to 2.5 GHz at resonant mode of 1.7 GHz. In [4], planar unequal split (10:1) Wilkinson power divider is proposed. The presented power divider designed by using the coupled transmission lines. The simulated and measured result satisfies the isolation and return loss -20 dB and 16% respectively. Wilkinson power divider with dc isolation is proposed in this paper [5]. It is

printed on the Ro4350B substrate of thickness and relative permittivity 1.5 mm and 3.66 respectively. It is operated at the frequency of 2.4 GHz [7].

In this paper, a small in size (11.6×18.5 mm²) Wilkinson power divider with unequal power splitting is designed on the RT5880 substrate and simulated. The simulated results such as return loss and isolation are obtained 2.5 GHz to 17 GHz and 15 dB respectively.

2. Power divider design & analysis

A regular unequal Wilkinson power divider consists of three ports is shown in Fig 1. It illustrates that 1 is input port and 2 and 3 are output ports. It splits the applied input signal power into two unequal output powers, named as P₂ and P₃ i.e. P₂ ≠ P₃. It accommodates unequal length of quarter wave transmission branches with distinct impedance profiles. These impedance values can be varied depend upon the power division ratio at outputs P₂/P₃. The isolation resistor R₁ is placed in between the two output branches to provide the better isolation.

The line impedance and isolation resistor values can be calculated by using the design equations shown in below (1) – (5). An additional isolation resistor R₂ is inserted at the end of transmission lines is shown in Fig 2. It provides isolation among the Ultra-wideband range

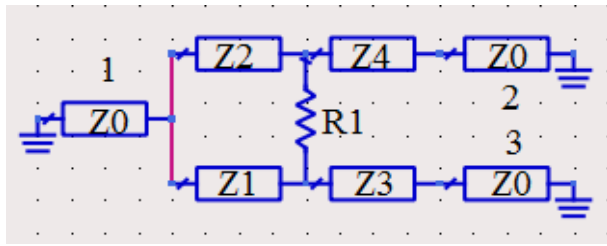


Fig. 1: Traditional Unequal Wilkinson Power Divider.

$$Z_1 = Z_0 \sqrt{\frac{1+K^2}{K^3}} \tag{1}$$

$$Z_2 = K^2 Z_1 = Z_0 \sqrt{K(1+K^2)} \tag{2}$$

$$Z_3 = (Z_0/K) \tag{3}$$

$$Z_4 = Z_0 K \tag{4}$$

$$R_1 = Z_0 \left(K + \frac{1}{K} \right) = R_2 \tag{5}$$

Here Z_0 is input impedance and K^2 is Power division ratio, the output impedances can be terminated with the input impedance Z_0 . The varied impedance values are calculated and tabulated below in the Table 1.

Table 1: Rate of Impedance

K^2	Z_1	Z_2	Z_3	Z_4	$R1=R2$
2	39.5	79.0	35.3	70.7	106.1
3	30.4	91.2	28.9	86.6	115.5
4	25.7	103	25.0	100	125.0
5	22.8	114	24.7	114.5	134.2
10	15.8	158	15.8	158.0	174.0

By using these impedance values the Wilkinson power divider is designed and generated the simulated layout of the respective transmission branches of the power divider. The generated layout of the designed unequal Wilkinson power divider is shown in Fig 3. It shows 1 is input port, 2 and 3 output ports respectively. Z_1, Z_2, Z_3, Z_4 and $R1=R2$ impedance costs can be selected based on the power division ratio K^2 , according to the Table 1.

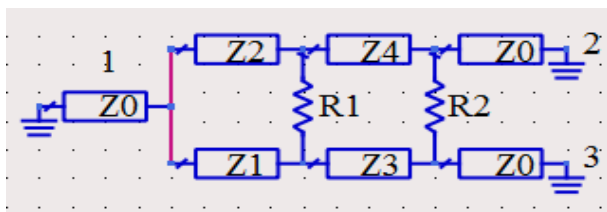


Fig. 2: Presented Unequal Wpd.

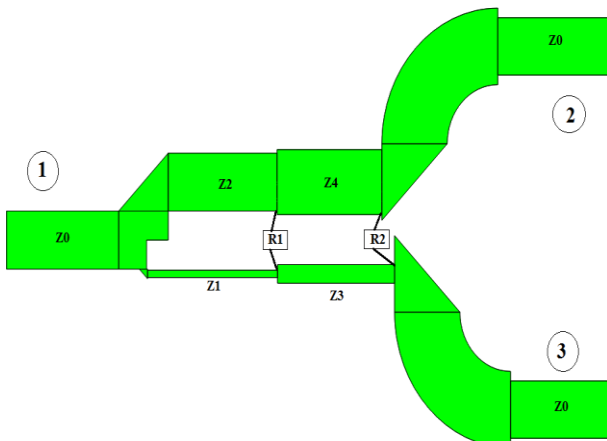


Fig. 3: Generated Layout of Proposed Wilkinson Power Divider.

3.2. Simulated, results and discussion

The composed unequal Wilkinson power divider (UWPD) designed on the RT5880 substrate of 1.5 mm thickness and permittivity 4.4, in ADS tool. The total volume of the designed Wilkinson power divider is $11.6 \times 18.5 \times 1.5 \text{ mm}^3$. The designed Wilkinson power divider covers the frequency spectrum bandwidth is 15.5 GHz with starting frequency 2.4 GHz to 17 GHz. Figure 4 and 5 Shows the simulated return loss of power divider and operated at the deep resonant frequency of 6 GHz.

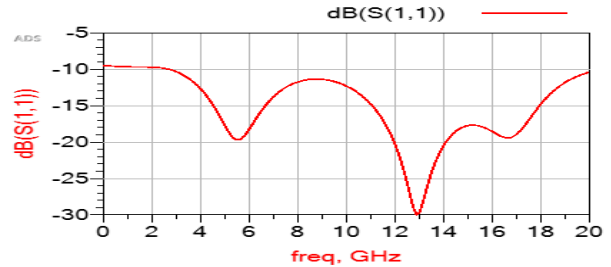


Fig. 4: Simulated Results of Return Loss.

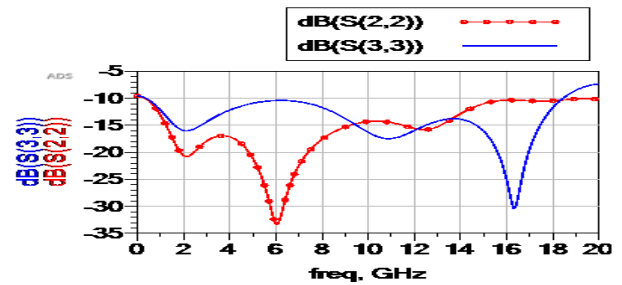


Fig. 5: Simulated Results of S_{22}, S_{33} .

The proposed Wilkinson power divider simulated return loss and isolation between the ports 2 and 3 results are shown in Fig 6. It indicates the maximum isolation is occurred at resonant frequency 16 GHz around 50 dB. The proposed Wilkinson power divider insertion loss at port 2 and port 3 is shown in Fig 7. It indicates the maximum isolation is obtained at resonant frequency 16 GHz around 50 dB. The phase relation of $S(1,3)$ and $S(1,2)$ is simulated and plots compared with each other, shown in Fig 8.

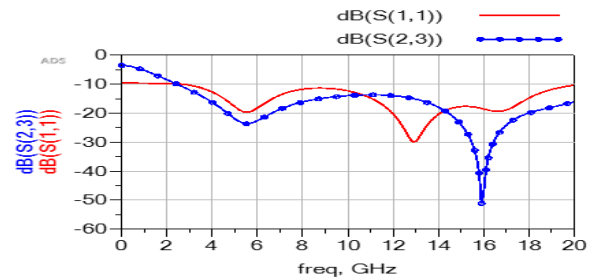


Fig. 6: Simulated Return Loss and Isolation At Port 3.

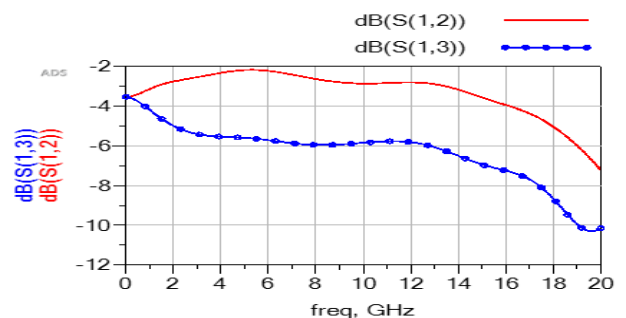


Fig. 7: Simulated Insertion Loss at Port 2 and Port 3.

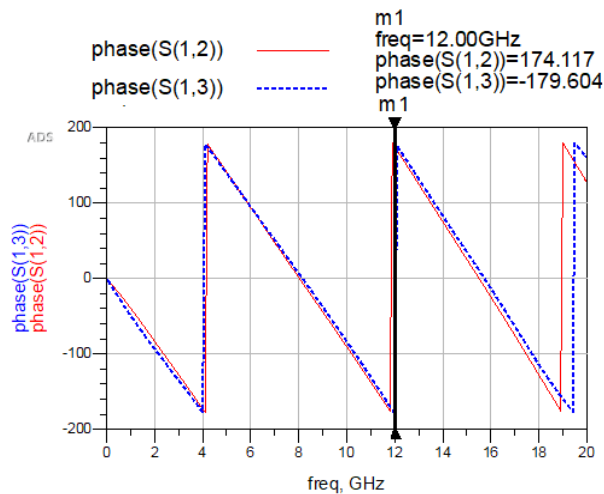


Fig. 8: Simulated Phase Relation S (1, 2), S (1, 3) Vs Frequency.

3. Conclusion

A simple planar, microstrip based 1 to 2 unequal Wilkinson power divider (UWPD) is designed and simulated on RT5880 substrate of 1.5 mm height. From the ADS software package analysis, it is seen that the proposed structure is operating in the ultra-wideband (UWB) frequency range i.e. 2.5 GHz to 18 GHz.

References

- [1] E.J. Wilkinson, an "N-way hybrid power divider", IRE Trans Microwave Theory Tech 8, 116-118 (1960). <https://doi.org/10.1109/TMTT.1960.1124668>.
- [2] J.-S. Lim, S.-W. Lee, C.-S. Kim, J.-S. Park, D. Ahn, and S. Nam, "A 4:1 unequal Wilkinson power divider," IEEE Microw. Wireless Compon. Lett. vol. 11, no. 3, pp. 124-126, Mar. 2001. <https://doi.org/10.1109/7260.915624>.
- [3] Chen, J. X., &Xue, Q. "Novel 5: 1 unequal Wilkinson power divider using offset double-sided parallel-strip lines". IEEE microwave and wireless components letters, 17(3), 175-177 (2007). <https://doi.org/10.1109/LMWC.2006.890458>.
- [4] Li, B., Wu, X., & Wu, W., "A 10: 1 unequal Wilkinson power divider using coupled lines with two shorts". IEEE Microwave and Wireless Components Letters, 19(12), 789-791 (2009). <https://doi.org/10.1109/LMWC.2009.2033506>.
- [5] Maktoomi, M. A., Hashmi, M. S., &Ghannouchi, F. M. "Theory and Design of a Novel Wideband DC Isolated Wilkinson Power Divider". IEEE Microwave and Wireless Components Letters, 26(8), 586-588(2016). <https://doi.org/10.1109/LMWC.2016.2585572>.
- [6] Pozar, D. M. Microwave engineering. John Wiley & Sons (2009).
- [7] P. V. Naidu, V. Ravi and A. Kumar, "A novel compact unequal wideband Wilkinson power divider for UWB and EW applications," 2017 Progress in Electromagnetics Research Symposium - Fall (PIERS - FALL), Singapore, 2017, pp. 737-742.
- [8] Vummadisetty, P. N., & Kumar, A. "Compact Uniplanar Multi Feed Multi Band ACS Monopole Antenna Loaded With Multiple Radiating Branches for Portable Wireless Devices". Advanced Electromagnetics, Vol. 7, No.2, (2018), pp.68-75. <https://doi.org/10.7716/aem.v7i2.661>.
- [9] Naidu, P. V., & Kumar, A. "ACS-fed e-shaped dual band uniplanar printed antenna for modern wireless communication applications". Radioelectronics and Communications Systems, Vol. 61, (2018), pp. 87-93. <https://doi.org/10.3103/S0735272718030019>.
- [10] Naidu, P. V., Kumar, A., & Kumar, V. "Uniplanar Y and L shaped ACS fed multiband and wideband compact printed antenna for advanced wireless communication systems". Microsystem Technologies, Vol. 24, No.4, (2018), pp.2051-2061. <https://doi.org/10.1007/s00542-017-3606-3>.
- [11] Vummadisetty, P. N., & Kumar, A. "Multi feed multi band uniplanar ACS fed antenna with N shape and inverted L shape radiating branches for wireless applications". Microsystem Technologies, Vol. 24, No.4, (2018), pp.1863-1873 <https://doi.org/10.1007/s00542-017-3565-8>.
- [12] Kumar, A., Naidu, P. V., & Kumar, V. "A compact uniplanar ACS fed multi band low cost printed antenna for modern 2.4/3.5/5 GHz applications". Microsystem Technologies, Vol. 24, No.3, (2018), pp. 1413-1422. <https://doi.org/10.1007/s00542-017-3556-9>.
- [13] Naidu, P. V., Kumar, A., & Rajkumar, R. "Design, analysis and fabrication of compact dual band uniplanar meandered ACS fed antenna for 2.5/5 GHz applications". Microsystem Technologies, pp.1-8. (2018). <https://doi.org/10.1007/s00542-018-3937-8>.
- [14] Naidu, P. V., & Kumar, A. "Design and development of triple band ACS fed antenna with M and rectangular shaped radiating branches for 2.45/5 GHz wireless applications". Microsystem Technologies, Vol. 23, No.12, (2017), pp.5841-5848. <https://doi.org/10.1007/s00542-017-3430-9>.
- [15] Kumar, A., Naidu, P. V., Kumar, V., & Ramasamy, A. K. "Design & Development of compact uniplanar semi-hexagonal ACS fed multi-band antenna for portable system application". Progress in Electromagnetics Research, Vol. 60, (2017), pp.157-167. <https://doi.org/10.1007/s00542-018-3937-8>.
- [16] Naidu, P. V., & Kumar, A. "A novel ACS fed multi band antenna loaded with mirrored S and L shaped strips for advanced portable wireless communication applications". Microsystem Technologies, Vol. 23, No.10, (2017), pp. 4775-4783. <https://doi.org/10.1007/s00542-017-3313-0>.
- [17] Naidu, P. V., & Kumar, R. "Design of a compact ACS-fed dual band antenna for Bluetooth/WLAN and WiMAX applications". Progress in Electromagnetics Research, Vol. 55, (2014), pp. 63-72. Doi: 10.2528/PIERC14101803. <https://doi.org/10.2528/PIERC14101803>.
- [18] Naidu, P. V., & Malhotra, A. "Design & analysis of miniaturized asymmetric coplanar strip fed antenna for multi-band WLAN/WiMAX applications". Progress in Electromagnetics Research, Vol. 57, (2015), pp. 159-171. <https://doi.org/10.2528/PIERC15042302>.
- [19] Ibrahim, Mohamed I., et al. "Design and Performance Analysis of a Miniature, Dual-Frequency, Millimeter Wave Linear Phased Array Antenna." IEEE Transactions on Antennas and Propagation 65.12 (2017): 7029-7037. <https://doi.org/10.1109/TAP.2017.2765542>.
- [20] Rauf, Ali Ahmed, et al. "16 ways X-band wilkinson power divider for phased array transmitter." Applied Sciences and Technology (IBCAST), 2018 15th International Bhurban Conference on. IEEE, 2018. <https://doi.org/10.1109/IBCAST.2018.8312321>.
- [21] Naidu, P. V., & Kumar, R. "A Compact Dual-Band Octagonal Slotted Printed Monopole Antenna for WLAN/ WiMAX and UWB Applications". Journal of Microwaves, Optoelectronics and Electromagnetic Applications, (2015), 14(1), 1-13. <https://doi.org/10.1590/2179-10742015v14i1422>.
- [22] Kumar, R., Naidu, V. P., Kamble, V., & Ram Krishna, R. V. S. "Simulation, Design of Compact Multi-band Microstrip Slot Antennas for WiMAX/WLAN and UWB Applications". Wireless Personal Communications, (2014), 80(3), 1175-1192. <https://doi.org/10.1007/s11277-014-2079-2>.
- [23] Kumar, R., Naidu, P. V., &Kamble, V. "Design of Asymmetric Slot Antenna with Meandered Narrow Rectangular Slit for Dual Band Applications". Progress in Electromagnetics Research B, (2014), 60, 111-123. <https://doi.org/10.2528/PIERB14042205>.
- [24] Naidu, P. V., Kumar, A., &Kamble, V. "A miniaturized triple band ACS-fed monopole printed antenna with meandered and circular ring shape resonators for WLAN/WiMAX applications". 2017 Progress in Electromagnetics Research Symposium - fall (PIERS - FALL), pp. 1933-1937. <https://doi.org/10.1109/PIERS-FALL.2017.8293454>.
- [25] Naidu, P. V., Kumar, A., & Kumar, V. "A very small wideband asymmetric coplanar strip fed printed dual band antenna for advanced communication applications". 2017 Progress in Electromagnetics Research Symposium - fall (PIERS - FALL), pp. 1928-1932. <https://doi.org/10.1109/PIERS-FALL.2017.8293453>.
- [26] Naidu, P. V., & Kumar, A. "ACS-fed multiband antenna loaded with staircase radiating strips for wireless communication systems". 2017 Progress in Electromagnetics Research Symposium Fall (PIERS - FALL), pp. 26-30. <https://doi.org/10.1109/PIERS-FALL.2017.8293105>.
- [27] Naidu, P. V., Kumar, A., & Kumar, V. (2017). "Simulation of meandered uniplanar printed antenna for multiband applications". 2017 Progress in Electromagnetics Research Symposium - fall (PIERS - FALL), pp. 1938-1941. <https://doi.org/10.1109/PIERS-FALL.2017.8293455>.
- [28] Kumar, A., Naidu, P. V., & Kumar, V. (2017). A novel rhombus shaped ACS fed multi band antenna loaded with meander branches for advanced communication applications. 2017 Progress in Elec-

- tromagnetics Research Symposium - fall (PIERS - FALL), pp. 724-730. <https://doi.org/10.1109/PIERS-FALL.2017.8293230>.
- [29] Kumar, A., & Naidu, P. V. (2016) "A compact O-shaped printed ACS fed monopole dual-band antenna for 2.4GHz Bluetooth and 5GHz WLAN/WiMAX applications". 2016 Progress in Electromagnetic Research Symposium (PIERS), pp. 2004-2008. <https://doi.org/10.1109/PIERS.2016.7734856>.
- [30] Kumar, A., & Naidu, P. V. (2016). "A novel compact printed ACS fed dual-band antenna for Bluetooth/WLAN/WiMAX applications". 2016 Progress in Electromagnetic Research Symposium (PIERS), pp. 2000-2003. <https://doi.org/10.1109/PIERS.2016.7734855>.
- [31] Naidu, P. V., & Malhotra, A. "A small ACS-fed tri-band antenna employing C and L shaped radiating branches for LTE/WLAN/WiMAX/ITU wireless communication applications. Analog Integrated Circuits and Signal Processing, (2015), 85(3), 489-496. <https://doi.org/10.1007/s10470-015-0637-5>.
- [32] Naidu, P. V., & Kumar, R. "A very small asymmetric coplanar strip fed multi-band antenna for wireless communication applications". Microsystem Technologies, (2015), 22(9), 2193-2200. <https://doi.org/10.1007/s00542-015-2613-5>.
- [33] Naidu, P. V., Malhotra, A., & Kumar, R. "A compact ACS-fed dual-band monopole antenna for LTE, WLAN/WiMAX and public safety applications". Microsystem Technologies, (2015), 22(5), 1021-1028. <https://doi.org/10.1007/s00542-015-2562-z>.
- [34] Vummadisetty, P. N., & Kumar, R. (2016). "Design of compact octagonal slotted hexagonal and rectangular shaped monopole antennas for dual/UWB applications". Turkish Journal of Electrical Engineering & Computer Sciences, 24, 2806-2824. <https://doi.org/10.3906/elk-1404-174>.
- [35] Naidu, V. P., & Kumar, R. (2014). Design of Compact Dual-Band/Tri-Band CPW-Fed Monopole Antennas for WLAN/WiMAX Applications. Wireless Personal Communications, 82(1), 267-282. <https://doi.org/10.1007/s11277-014-2207-z>.
- [36] Naidu, P. V., & Kumar, R. "Design of Cpw-Fed Dual-Band Printed Monopole Antennas for Lte/Wimax/Wlan and Uwb Applications". Progress in Electromagnetics Research C, (2014), 54, 103-116. <https://doi.org/10.2528/PIERC14071006>.
- [37] Kumar, R., Naidu V, P., & Kamble, V. "A compact asymmetric slot dual band antenna fed by CPW for PCS and UWB applications". International Journal of RF and Microwave Computer-Aided Engineering, (2014), 25(3), 243-254. <https://doi.org/10.1002/mmce.20855>.