International Journal of Basic and Applied Sciences, 14 (SI-1) (2025) 38-41

International Journal of Basic and Applied Sciences

Website: www.sciencepubco.com/index.php/IJBAS
https://doi.org/10.14419/n2t05e03
Research paper



Hybrid Propulsion Systems for Rail and Emerging Transit Vehicles: Challenges and Opportunities

Nisha Milind Shrirao *, Shital Kewte

Department of Electrical and Electronics Engineering, Kalinga University, Raipur, India
**Corresponding author E-mail: nisha.milind@kalingauniversity.ac.in*

Received: May 2, 2025, Accepted: May 27, 2025, Published: July 7, 2025

Abstract

The adoption of hybrid propulsion systems in rail and emerging transit vehicles holds significant promise for improving the sustainability and efficiency of public transportation. Considering increasing global pressure for decreasing carbon footprint and raising energy density, hybrid technologies can be used as an efficient combination of electric motors and internal combustion engines. This integration enables the vehicles to run seamlessly in different infrastructure settings, relying on electricity in the electrified parts and fossil fuels for longer or non-electrified parts. Other advantages analyzed include decreased fuel consumption, emission outputs, and improved flexibility of hybrids , meaning that such systems are valuable to transit authorities seeking to conform to environmental benchmarks. However, the actual deployment of these systems presents issues such as high capital costs, infrastructure requirements, as well as technical integration issues in integrating new systems on existing fleets. Further, there are constraints in battery technology, and the need for intelligent and compact energy management systems forms a notable challenge. Nevertheless, hybrid propulsion provides a way to design less dependent on fossil fuels transport solutions that would require less maintenance and provide better mileage. This paper explores these challenges and opportunities, providing insights into the future development of hybrid propulsion as a sustainable solution for rail and transit systems.

Keywords: *Hybrid Propulsion; Sustainable Transportation; Energy Efficiency; Emissions Reduction; Transit Infrastructure.*

1. Introduction

Hybrid propulsion systems are still widely used in rail transport systems and are becoming increasingly popular in other areas, shifting towards low-emission and sustainable forms of transit [1]. These systems integrate ICEs with electrical motors to increase the efficiency in new and current transit fleets while lessening emissions [11]. Transit authorities are hence under pressure to innovate and adopt environmentally responsible technologies without necessarily making the system less reliable or costly [3]. As for the two-tiered system approach, significant technical, economic, and even environmental problems linked with the integration of the hybrid systems are acutely observed [4]. These consist of the excessively high initial costs for implementation, the necessity of well-matched infrastructure, and innovations in battery production [12]. In this paper, an analysis of opportunities and challenges of hybrid propulsion in rail and transit sectors has been included to give insights into its future scope for a sustainable public transportation system [2].

2. Overview of hybrid propulsion systems

A hybrid powertrain has therefore been designed to incorporate the strengths of both the electric mode and the conventional fuel type. In the context of rail and transit vehicles, such systems utilize an electric motor for increased energy efficiency and an internal combustion engine for more extended trips and regions without charged tracks. This combination offers several advantages:

2.1. Energy efficiency

An integrated method of hybrid mode of operation in a vehicle is aimed at making full use of available energy in an automobile by coupling electric motors to internal combustion engines [5]. Another form of PM is the electric motor, which is used during low-speed or short trips, hence the conservation of fuel. For high speed, or rather longer distances, the internal combustion engine takes over because of the required power. This dynamic utilization of energy enables hybrid systems to consume the least fuel, hence making a global improvement in energy utilization [13]. They also use less power than their non-hybrid counterparts as they only use power according to the conditions of service, hence making it cheaper to use them and therefore more eco-friendly than the fuel-powered transit systems [6].

Copyright © Nisha Milind Shrirao, Shital Kewte. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

2.2. Lower emissions

The utilization of a hybrid propulsion system has some advantages, where the ability to cut, can be a major advantage. These vehicles give off zero emissions during operation when they are charged using electric power from regions with electrified networks [7]. Hybrids, even when using internal combustion engines, are more efficient, which reduces total emissions as compared to conventional diesel [8]. This utilization of both electricity and fossil fuels makes hybrids beneficial in decreasing greenhouse emissions, starting with CO2 as well as nitrogen oxides, and particulate matter that greatly contribute to increased health and environmental quality [14].

2.3. Operational flexibility

The use of combined power improves operational flexibility because transit vehicles can use a single power source interchangeably on distinct structures. Ever since there is sufficient electricity, as with most countries, vehicles can gain all the needed power from electrical systems and do not require fuel at all. Where there are no electrified tracks or the tracks are not electrified, it is the internal combustion engine to supplements the power supply [9]. This characteristic of hybrid systems makes it suitable in mixed rail systems where there is a combination of electric and non-electric rail sections [10].

3. Technological challenges

3.1. Battery efficiency and range

The creation of more effective and durable batteries is one of the main technological obstacles facing hybrid propulsion systems in rail and transit vehicles. To cover longer distances, these vehicles need high energy densities, particularly in places without electricity or during times of heavy demand. The cost, weight, and storage capacity of current battery technology are all constrained [15]. Longer electric-powered running periods could be made possible by increased battery efficiency, which would lessen the need for fossil fuels. Additionally, improving hybrid systems and expanding their usefulness will require developments in fast-charging technologies and lighter, more robust batteries.

3.2. Integration with existing infrastructure

There are several logistical and technological difficulties with integrating hybrid propulsion technologies with the current rail and transportation infrastructure. Most today's transit fleets and rail networks were not built with hybrid systems in mind, which makes retrofitting difficult and expensive. Legacy infrastructure, including station amenities, track electrification, and maintenance equipment, must work with the hybrid systems. The new technology can switch from diesel to electric traction seamlessly. Old transportation systems need to maintain power source stability requires a lot of engineering work and resources for new infrastructure and staff training.

3.3. Control systems and software

Modern control systems need to work with advanced software capabilities to switch between an internal combustion engine and an electric motor. Advanced interfaces monitor multiple energy sources and control power output based on operational requirements, along with a battery management system and energy system controls. A system needs to be able to manage power mode changes smoothly because it needs to control energy distribution during acceleration and regeneration of energy during braking.

4. Economic and operational considerations

4.1. Initial investment

Currently, the high initial cost of hybrid propulsion systems is the biggest obstacle to their massive deployment. Integration of power sources with complex control systems makes hybrid vehicles more expensive than vehicles that use simple electric or diesel propulsion. Transportation organizations in cash-strapped areas consider the high initial system cost as the main barrier to adopting hybrid systems.

4.2. Return on investment (ROI)

Hybrid propulsion is an operational solution that benefits all types of rail and transit vehicles. It offers better transport systems by combining lower emissions and better energy efficiency with more flexibility of operations. Hybrids activate their electric motors throughout electrified areas to reduce sounds while moving short distances, thus improving passenger comfort in their environment. Hybrid systems give transit authorities a permanent cost advantage by operating over unpowered track regions while requiring no changes to existing railway infrastructure.

4.3. Maintenance and support

Systems that combine hybrid propulsion technology cause higher costs and added complexity regarding maintenance and support compared to traditional cars. Hybrid systems require special training in operation and maintenance for both operators and technicians to perform correctly. Disciplines involving both hybrid diagnostic capabilities and electric system control alongside fuel-powered system management are essential for delivering end-to-end support for such vehicles. Eric Thuot emphasized the requirement to modernize maintenance centers, which will need the expertise to service high-voltage electric components as well as hybrid systems. These additional operational requirements drive up early adoption expenses, yet these costs will likely decrease as infrastructure expands and the knowledge base increases.

5. Environmental impact

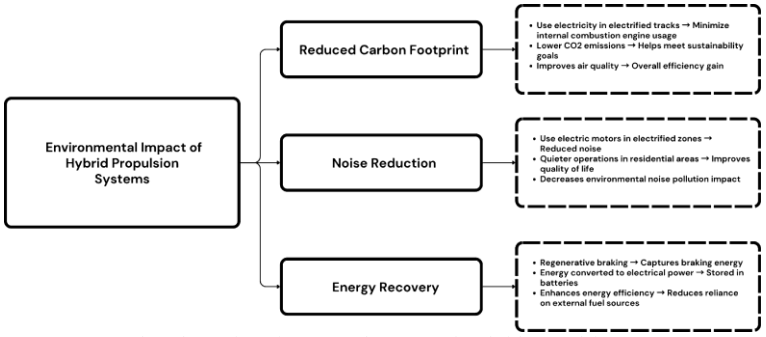


Fig. 1: Flowchart of Environmental Impact of Hybrid Propulsion Systems.

5.1. Reduced carbon footprint

The reduction of carbon emissions in rail and transit systems depends heavily on hybrid propulsion technology. When running under electrified track conditions, hybrids replace internal combustion engines, resulting in two notable benefits, including reduced carbon dioxide emissions and decreased usage of combustion-based fuel. Fuels become less necessary as greenhouse gas emissions drop because of reduced consumption. Sustainability targets, along with better air quality, become achievable to transportation authorities by using hybrid systems that operate under limited environmental regulations. Hybrid vehicles lower the transportation sector's carbon emissions because they operate better than standard engines, even while running on fossil fuels.

5.2. Noise reduction

Implementing hybrid propulsion systems into running vehicles generates an active reduction of urban noise pollution. Conventional diesel engine operations generate noticeable noise emissions throughout urban transportation systems and rail networks. Short-distance movements combined with electrified regions lead hybrids to activate electric motors for producing sound reduction benefits that improve passenger comfort levels. Inside residential areas where strong noise levels prevail, the reduction strategy delivers the most effective disturbance reduction.

5.3. Energy recovery

Systems that use hybrid propulsion techniques recover energy optimally through leading regenerative braking operations. The system enables vehicles used in mass transit to save braking energy for future use as electrical power. By implementing this method, vehicles require no recharge sessions or gas, propane, and demonstrate improved energy efficiency rates.

6. Opportunities for future development

6.1. Advanced battery technology

Hybrid propulsion systems used in rail and transit vehicles will require advanced battery technology improvements to achieve success in the future. The increase in hybrid system capabilities related to energy storage and efficiency, and charging speed dynamics will enable longer-distance applications while diminishing fossil fuel dependency. New battery chemistries combined with solid-state batteries promise to produce longer-lasting batteries with more energy for electric-only car travel. Technological advances in operating cost management and hybrid system sustainability enhancement, combined with network integration capabilities, now make hybrids suitable for widespread applications.

6.2. Electrification expansion

Continuous rail network electrification creates an essential opportunity to improve hybrid propulsion systems. Hybrid cars need only change propulsion from diesel to electric power as rail lines become electrified, thereby enabling them to operate efficiently across electrified and non-electrified network areas. These integrated units maintain diesel power operation over longer distances while maximizing electrical power whenever possible in locations without electricity. The advancing expansion of electrified rail networks will improve hybrid systems' efficiency to become better environmentally conscious transport alternatives. The integration of hybrid systems serves to support rail operations in locations with ongoing electrification initiatives.

6.3. Integration with smart grids

Through integrating smart grids with hybrid propulsion systems, new options emerged for more effective energy control. Smart grids help transportation operators reduce energy expenses while improving operational efficiency through power load balancing, advanced energy distribution, and dynamic charging capabilities. Through connectivity with smart grids, hybrid vehicles could optimize their charging schedule and energy discharge process while lowering system demand during peak periods. This combination allows better alignment of electricity availability and automobile power consumption, thereby establishing a budget-friendly method for hybrid transportation system power control.

6.4. Alternative fuels

Hybrid propulsion systems achieve greater operational and environmental benefits when alternative fuels such as hydrogen, biofuels, and synthetic fuels are implemented. Alternative fuels reduce hybrid system carbon emissions to establish a sustainable substitute for fossil fuel consumption. Biofuels and synthetic fuels derived from renewable raw materials exhibit lower greenhouse gas emissions than traditional diesel does.

7. Conclusion

Electric motors paired with an internal combustion engine are an environmentally sustainable mobility solution plus economic benefits to customers. Current barriers to hybrid propulsion adoption are a lack of battery development and the need for railroad network integration and capital expenditure. Full implementation of hybrid propulsion depends on the advancement of power battery systems, like energy recovery, and wider electrified railway networks. Fast hybrid system deployment into service depends on better collaboration between different sectors and more research funding support between private industries and public agencies. Despite technology limitations and financial barriers and operational challenges, hybrid propulsion in transportation has enduring value by reducing pollution and cost, and better health outcomes. Mass transit needs a hybrid solution to achieve sustainable transportation and oil independence.

References

[1] Shah, K. J., Pan, S. Y., Lee, I., Kim, H., You, Z., Zheng, J. M., & Chiang, P. C. (2021). Green transportation for sustainability: Review of current barriers, strategies, and innovative technologies. *Journal of Cleaner Production*, *326*, 129392. https://doi.org/10.1016/j.jclepro.2021.129392.

[2] Kalaiyarasi, V., & Tamilarasi, M. (2015). Survey of load balancing routing protocols in MANET. *International Journal of Communication and Computer Technologies, 3*(2), 58-62. https://doi.org/10.31838/ijccts/03.02.02.

[3] Demirel, P., & Kesidou, E. (2019). Sustainability-oriented capabilities for eco-innovation: Meeting the regulatory, technology, and market demands. *Business Strategy and the Environment, 28*(5), 847-857. https://doi.org/10.1002/bse.2286.

[4] Gandomkar, H., Nazari, S., Salahi Ardakani, M. M., & Kazemi, E. (2022). Comparison of genome size of diploid and tetraploid of rainbow trout (Oncorhynchus mykiss). *International Journal of Aquatic Research and Environmental Studies, 2*(2), 7-10. https://doi.org/10.70102/IJARES/V2I2/2.

[5] Suciu, C. C., Igret, S. V., Vetres, I., & Ionel, I. (2024). Review of the Integration of Hybrid Electric Turbochargers for Mass-Produced Road Vehicles. *Energies, 17*(6), 1484. https://doi.org/10.3390/en17061484.

[6] Calef, R. (2025). Quantum computing architectures for future reconfigurable systems. SCCTS Transactions on Reconfigurable Computing, 2(2), 38–49.

[7] Veerappan, S. (2025). Digital Twin Modeling for Predictive Maintenance in Large-Scale Power Transformers. National Journal of Electrical Machines & Power Conversion, 39-44.

[8] Verma, A., & Nair, R. (2025). Chromatographic Methods for the Separation of Naturally Occurring Bioactive Compounds and Their Applications in Industry. *Engineering Perspectives in Filtration and Separation, 2*(1), 18-24.

[9] Skoko, I., Stanivuk, T., Franic, B., & Bozic, D. (2024). Comparative Analysis of CO2 Emissions, Fuel Consumption, and Fuel Costs of Diesel and Hybrid Dredger Ship Engines. *Journal of Marine Science and Engineering, 12*(6), 999. https://doi.org/10.3390/jmse12060999.

[10] Abdul Latheef, N. (2022). Career Guidance Sources in Libraries: A Study of Arts & Science Colleges Affiliated to Thiruvalluvar University, Tamil Nadu. *Indian Journal of Information Sources and Services, 12*(1), 21–27. https://doi.org/10.51983/ijiss-2022.12.1.3061.

[11] Ling-Chin, J., Giampieri, A., Wilks, M., Lau, S. W., Bacon, E., Sheppard, I., ... & Roskilly, A. P. (2024). Technology roadmap for hydrogen-fuelled transportation in the UK. *International journal of hydrogen energy, 52,* 705-733. https://doi.org/10.1016/j.ijhydene.2023.04.131.

[12] Fatma, A., & Ayşe, M. (2025). Secure data transmission advances for wireless sensor networks in IoT applications. Journal of Wireless Sensor Networks and IoT, 2(1), 20-30.

[13] Sipho, T., Lindiwe, N., & Ngidi, T. (2025). Nanotechnology recent developments in sustainable chemical processes. Innovative Reviews in Engineering and Science, 3(2), 35–43.

[14] Brenna, M., Bucci, V., Falvo, M. C., Foiadelli, F., Ruvio, A., Sulligoi, G., & Vicenzutti, A. (2020). A review of energy efficiency in three transportation sectors: Railways, electrical vehicles, and marine. *Energies, 13*(9), 2378. https://doi.org/10.3390/en13092378.

[15] Adeyinka, A. M., Esan, O. C., Ijaola, A. O., & Farayibi, P. K. (2024). Advancements in hybrid energy storage systems for enhancing renewable energy-to-grid integration. *Sustainable Energy Research, 11*(1), 26. https://doi.org/10.1186/s40807-024-00120-4.

[16] Ariunaa, K., Tudevdagva, U., & Hussai, M. (2023). FPGA-Based Digital Filter Design for Faster Operations. Journal of VLSI Circuits and Systems, 5(2), 56–62. https://doi.org/10.31838/jvcs/05.02.09.

[17] Abd Elsadek, E. M., Kotb, H., Abdel-Khalik, A. S., Aboelmagd, Y., & Abdelbaky Elbatran, A. H. (2024). Experimental and techno-economic analysis of solar PV system for sustainable building and greenhouse gas emission mitigation in harsh climate: A case study of Aswan educational building. *Sustainability, 16*(13), 5315. https://doi.org/10.3390/su16135315.

[18] VikramGoud, M., Biswas, P. K., Sain, C., Babu, T. S., & Balachandran, P. K. (2024). Advancement of electric vehicle technologies, classification of charging methodologies, and optimization strategies for sustainable development-a comprehensive review. *Heliyon. https://doi.org/10.1016/j.heliyon.2024.e39299*. https://doi.org/10.1016/j.heliyon.2024.e39299.

[19] Neamah, A. A., & Neamah, S. A. (2025). Generalized cayley graphs and group structure: Insights from the direct products of P_2 and C_3. Results in Nonlinear Analysis, 8(1), 24-31.

[20] Bhargav, Avireni, and Phat Huynh. 2021. "Design and Analysis of Low-Power and High Speed Approximate Adders Using CNFETs" *Sensors* 21, no. 24: 8203. https://doi.org/10.3390/s21248203.