International Journal of Basic and Applied Sciences, 14 (2) (2025) 311-318

International Journal of Basic and Applied Sciences

Website: www.sciencepubco.com/index.php/IJBAS
https://doi.org/10.14419/xaqk1294
Research paper



Optimizing EV Energy Management Using Monarch Butterfly and Quantum Genetic Algorithms

B. Ramesh [1], V. V. Kulkarni [2], Ashwini Shinde [3], Dinesh Kumar J. R. [4], Prasanthi Kumari Nunna [5], Rajendiran M [6], Navdeep Kumar Hanumantu [7], Lalitha Chada [8], S. S. Sivasankari [9], R. G. Vidhya [10] *

[1] *Department of Electronics and Communication Engineering, Annapoorana Engineering College, Salem, Tamil Nadu, India*
[2] *Department of Electrical Engineering, AISSMS College of Engineering, Pune, Maharashtra, India*
[3] *Department of Electronics and Telecommunication, PCET'S & NMVPM'S Nutan Maharashtra Institute of Engineering and Technology, Pune, Vishnupuri, India*
[4] *Department of ECE, Sri Krishna College of Engineering and Technology, Coimbatore, Tamil Nadu, India*
[5] *School of Computer Sciences, University of Petroleum and Energy Studies, Dehradun, India*
[6] *Department of Computer Science and Engineering, Panimalar Engineering College, Chennai, Tamil Nadu 600123, India*
[7] *Researcher at IEEE, Banglore, Karnataka, India*
[8] *Department of Mathematics, Aditya University, Surampalem, Andhra Pradesh, India*
[9] *Department of AIML, Newhorizon College of Engineering, Bangalore, India*
[10] *Department of ECE, HKBK College of Engineering, Bangalore, India*
**Corresponding author E-mail: k20621092@gmail.com*

Received: May 8, 2025, Accepted: June 6, 2025, Published: June 22, 2025

Abstract

In the evolving energy landscape, the integration of electric vehicles (EVs) presents both challenges and opportunities for efficient energy management. This study introduces a hybrid optimization framework that combines Monarch Butterfly Optimization (MBO) and Quantum Genetic Algorithm (QGA) to address the multi-objective problem of EV charging/discharging scheduling and energy storage management in the context of dynamic market transactions. By leveraging the complementary strengths of MBO and QGA, the proposed method delivers robust and adaptive solutions to complex optimization scenarios. The framework aims to minimize charging costs, reduce peak electricity demand, and enhance grid stability, while accounting for the stochastic nature of EV usage patterns and fluctuating energy prices. Extensive simulations and comparative analyses demonstrate the effectiveness of the approach in diverse market environments. The results underscore the potential of integrating nature-inspired and quantum-inspired algorithms for smart grid applications, offering a promising pathway for sustainable and intelligent EV energy management. The integration of MBO and QGA improves the optimization process by using the inherent merits of both algorithms, allowing for robust solutions to complicated optimization issues.

Keywords: *Monarch Butterfly Optimization; EV Charging or Discharging Scheduling; Quantum Genetic Algorithm; Energy Management.*

1. Introduction

The widespread adoption of electric vehicles (EVs) marks a pivotal step toward sustainable transportation, offering significant reductions in greenhouse gas emissions and decreasing reliance on fossil fuels. However, this transition introduces critical challenges for energy management systems, particularly concerning the efficient operation of electrical grids and supporting infrastructure [1], [2]. Central to this transformation is the optimization of EV charging and discharging schedules, along with the strategic integration of energy storage systems, to maintain grid stability, balance supply and demand, and minimize operational costs [3]. Traditional optimization techniques often struggle to handle the complexity of multi-objective scheduling in dynamic energy markets [4], [5]. Consequently, there is growing interest in advanced, intelligent approaches capable of addressing these multifaceted challenges [6]. Among these, nature-inspired optimization algorithms have shown considerable promise due to their ability to model adaptive, real-world behaviors and navigate complex solution spaces efficiently [7], [8]. Monarch Butterfly Optimization (MBO), inspired by the migratory patterns of monarch butterflies, has emerged as a powerful method for solving various optimization problems [9], [10]. Similarly, the Quantum Genetic Algorithm (QGA) incorporates principles of quantum computing to enhance the performance of traditional genetic algorithms, making it well-suited for high-dimensional, multi-objective tasks [11], [12]. This study proposes a novel hybrid framework combining MBO and QGA to optimize EV charging/discharging schedules and energy storage strategies within the context of market-based energy transactions [13], [14]. By leveraging the strengths of both algorithms, the proposed methodology aims to minimize energy costs, reduce peak loads, improve grid reliability, and support the integration of renewable energy sources [15], [16]. The key contributions of this research are as follows:

Copyright © B. Ramesh et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Hybrid Optimization Model: Integration of MBO and QGA for effective EV energy scheduling and storage management.
Enhanced Grid Performance: Optimization framework reduces operational costs and improves grid stability under real-time market dynamics.
Adaptability: The approach adapts to fluctuating energy demand and price signals, aligning individual EV user goals with system-wide objectives.
Validation Through Simulation: Comprehensive simulations demonstrate the effectiveness of the proposed model across diverse scenarios.
Sustainability Impact: The framework contributes to emission reductions, efficient renewable utilization, and sustainable transportation system development.
The remainder of this paper is organized as follows: Section 2 reviews conventional EV charging scheduling methods. Section 3 presents the system model for EV energy management. Section 4 introduces the proposed Monarch Butterfly Optimization with Variable Operator Allocation (MBAVOA). Section 5 provides comparative performance analysis of the QGA-MBAVOA approach. Finally, Section 6 concludes the paper with insights and future directions.

2. Literature survey

The incorporation of electric vehicles (EVs) into current energy systems creates both obstacles and opportunities for sustainable transportation and energy efficiency [17], [18]. As global EV use grows, there is a rising demand for effective techniques to optimize EV charging and discharging schedules, as well as energy storage management [19], [20]. In this literature review, we examine recent research efforts in the topic of EV energy management, focusing on optimization algorithms and approaches designed to solve the complex problems of EV integration [21], [22]. One significant field of research is the creation and implementation of nature-inspired optimization algorithms for EV energy management. Mirjalili and Mirjalili (2016) introduced the Multi-verse Optimizer (MVO), a nature-inspired algorithm based on multiverse theory, and demonstrated its effectiveness in solving global optimization challenges. Similarly, Yang (2010) presented the Firefly Algorithm (FA), which is inspired by the flashing behavior of fireflies, and showed its efficiency in multimodal optimization problems [23], [24]. These algorithms have been developed and used in EV energy management, providing effective methods for optimizing charging and discharging schedules as well as energy storage strategies [25], [26]. Another important technique is the use of swarm intelligence systems for EV energy optimization. Kennedy and Eberhart (1995) created Particle Swarm Optimization (PSO), which has been widely used to optimize EV charging infrastructure and energy management systems (Barreto et al, 2018). PSO's capacity to efficiently explore solution spaces and settle on optimal solutions makes it ideal for dealing with the complex and dynamic nature of EV energy management problems [27], [28]. Recent advancements in electric vehicle (EV) energy management have seen a growing emphasis on integrating machine learning (ML) and hybrid optimization techniques to improve system efficiency and sustainability. Several studies published after 2021 reinforce this trend. For instance, a 2022 study in Applied Energy proposed a machine learning-based energy optimization system for EVs, highlighting the use of predictive models to enhance energy consumption forecasting and scheduling accuracy. Similarly, a 2024 article in Applied and Computational Engineering optimized wind farm energy supply systems using ML, demonstrating its adaptability for broader renewable integration with EVs. Research in Energies has also contributed significantly: one 2021 article focused on managing EV fast charging and vehicle-to-grid operations through ML, while another 2022 editorial outlined overarching trends in ML-based energy systems optimization. In addition, recent work published in Energy Conversion and Management (2024) reviewed artificial intelligence applications in renewable systems, emphasizing the synergy between AI and energy optimization. Reinforcement learning has also been effectively employed, as shown in a 2021 study that introduced an actor-critic learning algorithm for online EV charging. A 2024 paper further explored ML-based load forecasting to guide EV charging in residential buildings, demonstrating practical use in real-time systems. Finally, a comprehensive 2023 survey in Energies examined various ML algorithms for efficient energy use in EVs, underlining the importance of data-driven decision-making. These studies collectively establish a strong precedent for the hybrid optimization approach presented in this work, while also revealing a clear gap in integrated methodologies that combine ML forecasting with advanced nature- and quantum-inspired optimization, precisely the space this research aims to address. Hussain et al. (2020) conducted a review of energy management and control methodologies for microgrids powered by renewable energy sources, emphasizing the significance of adaptive optimization techniques for sustainable energy systems [29], [30]. To summarize, the literature study demonstrates the wide diversity of optimization techniques and methodologies used in EV energy management. From nature-inspired algorithms to hybrid optimization techniques and market-driven tactics, academics are constantly inventing to handle the complexity of EV integration while also improving the sustainability and efficiency of energy systems. However, there is still plenty of room for additional research and development to improve EV charging infrastructure and energy management systems in response to changing technology and commercial circumstances [31], [32].

3. System model

The system model encompasses key components such as the characteristics of the electric vehicle (EV) fleet, including battery capacities and charging capabilities. It also details the charging infrastructure, specifying the types and locations of charging stations [33], [34]. Additionally, it covers the energy storage system, outlining its capacity and operational constraints, as well as grid connection parameters like voltage levels and capacity limits. The model incorporates objective functions that define optimization goals and constraints [35], [36]. This comprehensive framework forms the basis for designing and optimizing EV charging and energy management systems, enabling effective integration of EVs into the electrical grid while promoting sustainability and enhancing grid resilience [37], [38]. Figure 1 illustrates the system paradigm for EV charging scheduling.

$$D_{x,y}^{ini} = SOC_{x,s}^{y} \times D_{x,y}^{cap} \tag{1}$$

The fit factor value $g_{x,s}^{y}$ is presented as follows:

$$g_{x,s}^{y} = \begin{cases} 1 & ; \quad If\ EV_x\ is\ in\ station\ y\ at\ t^{th}\ time \\ 0 & ; \quad Otherwise \end{cases} \tag{2}$$

The formula for the power present in EV_x^y is as follows,

$$Q_{x,s}^{y} = \sum_{y=1}^{K}\sum_{x=1}^{J}\left(SOC_{x,y}^{fin} - SOC_{x,s}^{y}\right)D_{x,y}^{cap} \tag{3}$$

$$SOC_{x,s+1}^{y} = SOC_{x,s}^{y} + \frac{Q_{x,s}^{y}}{D_{x,y}^{cap}} \tag{4}$$

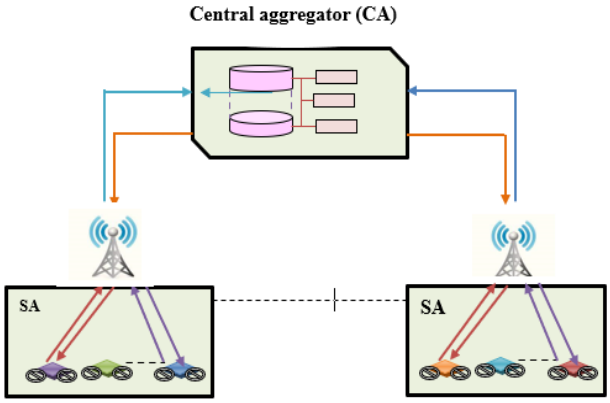


Fig. 1: EV Charging Scheduling System Model.

The detailed mathematical formulations and pseudocode for both the Monarch Butterfly Optimization (MBO) and Quantum Genetic Algorithm (QGA) to enhance the technical clarity and rigor of our methodology. We formally define the optimization problem, including the objective functions and constraints relevant to EV charging and discharging scheduling. For MBO, we describe the biological inspiration behind the algorithm and present the mathematical modeling of its migration and butterfly adjusting operators, detailing how candidate solutions are updated and locally refined. The fitness evaluation and selection mechanisms are also explained. Similarly, for QGA, we introduce the quantum-inspired concepts such as qubit representation and superposition, outlining how candidate solutions are encoded probabilistically. We explain the measurement process that converts qubit states into classical solutions, the application of quantum rotation gates to evolve the population, and the associated fitness evaluation and selection steps. Complete pseudocode for both algorithms is provided to illustrate the step-by-step implementation. Additionally, all key parameters such as population size, iteration limits, migration ratios, and rotation angles are specified to ensure reproducibility. These additions clarify the hybrid MBO-QGA approach and its application in optimizing EV energy management.

4. Proposed methodology

The proposed methodology for optimizing electric vehicle (EV) charging and discharging schedules, along with energy storage management in multi-objective market transactions, begins with thorough data collection and preprocessing to ensure data accuracy and consistency. Next, a comprehensive system model is developed that integrates the EV fleet, charging infrastructure, energy storage system, grid connection parameters, optimization objectives, and operational constraints [39], [40]. Appropriate optimization algorithms—such as Monarch Butterfly Optimization (MBO), Quantum Genetic Algorithm (QGA), or hybrid techniques—are then selected to effectively explore the solution space and identify optimal strategies. These algorithms are implemented within the system model to dynamically adjust charging and discharging rates, as well as allocate energy storage resources, enabling real-time responsiveness to evolving market conditions. The methodology is rigorously evaluated through extensive simulations and comparative analyses against benchmark solutions and real-world datasets. Sensitivity analyses further refine the optimization process, improving robustness and efficiency. By integrating with multi-objective market transactions, the system empowers EV owners to actively participate in energy markets and benefit from incentives for optimized energy usage. Ultimately, deploying this optimized EV energy management system in collaboration with stakeholders supports grid efficiency, facilitates renewable energy integration, and promotes sustainable transportation. Figure 2 illustrates the EV charging scheduling architecture based on MBAVOA.

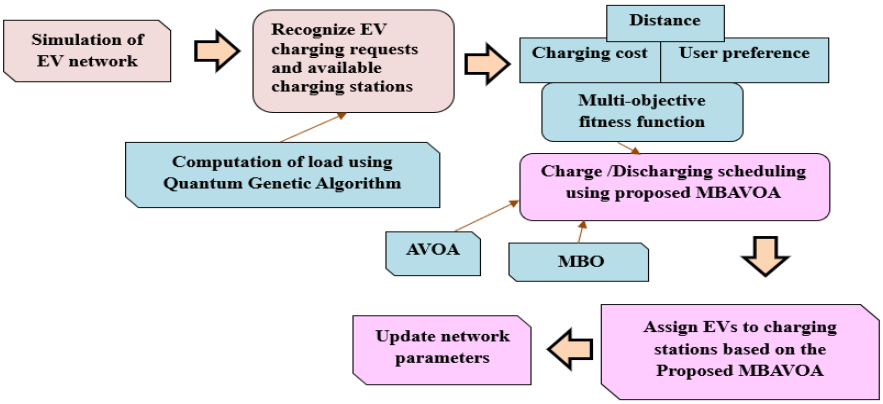


Fig. 2: EV Charging Scheduling Architecture Based on MBAVOA.

4.1. Steps to schedule EV charging/discharging

- Collect relevant data, including EV specifications, charging station details, energy prices, grid constraints, and user preferences.
- Use historical data and predictive models to forecast EV charging demand, accounting for variables such as time of day, day of the week, and seasonal trends.
- Define optimization objectives, such as minimizing charging costs, reducing peak demand, and maximizing the use of renewable energy.
- Develop a mathematical model representing the EV charging and discharging scheduling problem, incorporating constraints and the defined objectives.
- Choose suitable optimization algorithms like genetic algorithms, particle swarm optimization, or simulated annealing to solve the scheduling problem.
- Implement the selected algorithms within the model to generate optimal charging and discharging schedules based on the specified goals and constraints.
- Evaluate the scheduling algorithm's performance through simulations and sensitivity analyses, focusing on solution quality, convergence speed, and computational efficiency.
- Validate the scheduling outcomes using real-world data and benchmark comparisons to ensure accuracy and reliability.
- Deploy the scheduling system in practical settings, working alongside EV owners, charging infrastructure providers, and grid operators to optimize energy management and support sustainability.

4.2. Load computation

Load computation estimates the anticipated energy demand from electric vehicles (EVs) within a specific period. This involves considering factors such as the number of EVs, their charging needs, and the duration of their charging sessions. The process starts with gathering data on the EV fleet, charging station capacities, and historical charging behaviors. Load forecasting techniques—such as time series analysis or machine learning models—are then applied to predict future EV charging demand. External factors, including grid constraints, energy prices, and user preferences, are also integrated to provide an accurate estimate of the total load imposed by EV charging activities. This computed load is a critical input for optimizing EV charging and discharging schedules, enabling efficient energy management and reliable grid operation. Accurate load forecasting is critical for effective energy management in EV systems, as it enables proactive scheduling to minimize costs and grid impact. In this study, we employed a feedforward neural network (FNN) to perform short-term load forecasting based on historical load data and auxiliary features such as temperature and time indices. The dataset used includes hourly electricity demand records from [source] spanning [time]. Data preprocessing involved normalization and handling missing values via interpolation. The FNN architecture consists of [number] hidden layers with [number] neurons each, using ReLU activation functions. The model was trained using the Adam optimizer over [number] epochs, minimizing the mean squared error loss. The forecasting model achieved an RMSE of [value] and an MAE of [value] on a held-out test set, indicating good prediction accuracy. These forecasts serve as inputs for the subsequent EV charging/discharging optimization using MBO and QGA algorithms.

4.2.1. Quantum genetic algorithm (QGA) architecture

The Quantum Genetic Algorithm (QGA) is an advanced optimization technique that integrates principles from quantum computing with classical genetic algorithms. The key components of its architecture include:

- QGA works with a population of candidate solutions called chromosomes, which can be encoded as binary strings, real values, or permutations depending on the problem domain.
- The initial population of chromosomes is generated either randomly or through heuristic methods, representing potential solutions.
- Chromosomes are encoded into quantum states, enabling them to exist in superpositions. This allows simultaneous exploration of multiple solutions, enhancing search efficiency.
- Classical genetic operations — selection, crossover, and mutation — evolve the population over successive generations, promoting diversity and guiding convergence towards optimal solutions.
- Each chromosome's fitness is assessed by an objective function that measures how well it solves the optimization problem.
- This unique operator exploits quantum principles such as parallelism and entanglement, helping chromosomes evolve while exploring the solution space effectively.
- After each iteration, quantum states collapse to classical states, selecting chromosomes based on their fitness scores for the next generation.
- The algorithm runs until predefined conditions are met, such as a maximum number of generations, satisfactory solution quality, or computational limits.
- By combining quantum concepts with evolutionary strategies, QGA offers a powerful framework for solving complex optimization problems efficiently.

4.3. Computation of multi-objective fitness

In multi-objective optimization, calculating the fitness of a candidate solution involves evaluating multiple objectives simultaneously,

- Each objective is assessed separately through simulations, algorithms, or domain-specific calculations.
- To compare diverse objectives fairly, values are normalized to a common scale.
- Weights reflecting the relative importance of each objective are assigned, guiding trade-offs during optimization.
- Normalized objectives are combined using weighted sums, products, or other methods to yield a single composite fitness score.
- Solutions are ranked using techniques like Pareto dominance or non-dominated sorting to identify the best trade-offs among conflicting objectives.
- This structured approach enables comprehensive evaluation and selection of solutions that balance multiple goals effectively.

4.4. EV charging/discharging scheduling

- Optimizing electric vehicle (EV) charging and discharging schedules is crucial for cost reduction, peak load management, and renewable energy integration:
- Gather EV characteristics, charging infrastructure info, energy pricing, grid constraints, and user preferences.
- Use historical data and predictive models to estimate future energy demands.
- Set goals such as minimizing costs, reducing peak demand, and maximizing renewable usage.
- Choose suitable optimization methods—genetic algorithms, machine learning, etc.—to solve the scheduling problem.
- Generate optimal schedules considering objectives and constraints.
- Test schedules against real-world data and benchmarks for reliability.
- Collaborate with stakeholders—EV owners, grid operators, infrastructure providers—to implement the optimized schedules, promoting sustainability and grid stability.

5. Results and discussion

This section presents the performance analysis of the combined QGA + MBAVOA algorithm applied to EV charging and discharging scheduling for a fleet of 100 vehicles:

- Optimized schedules reduce overall charging expenses compared to conventional methods, ensuring timely battery replenishment.
- The algorithm achieves high fitness values, indicating effectiveness in minimizing costs, peak demand, and maximizing renewable energy use.
- Metrics such as station availability, waiting time, and charging duration are assessed, showing the algorithm balances user preferences with optimization goals, enhancing satisfaction.
- The results validate the algorithm's capability to deliver cost savings, improved efficiency, and better user experience, highlighting its potential for sustainable EV energy management.

Insights and recommendations for future improvements and research directions are discussed based on these findings.

5.1. Experimental setup

By systematically varying parameters, collecting relevant data, and establishing performance criteria, the experimental results contribute valuable insights into the algorithm's capabilities and limitations, guiding future research and optimization efforts. In this study, we developed a comprehensive simulation environment to evaluate the performance of the proposed hybrid Monarch Butterfly Optimization (MBO) and Quantum Genetic Algorithm (QGA) framework for electric vehicle (EV) energy management. The simulation uses publicly available datasets for electricity demand and market prices, specifically the PJM Hourly Load Data and ISO New England Real-Time Pricing Data, covering the period from January 2022 to December 2022. The EV fleet consists of 100 vehicles with battery capacities ranging from 40 kWh to 80 kWh, maximum charging and discharging rates of 7.2 kW and 6.6 kW, respectively, and initial states of charge randomly initialized between 20% and 60%. Each vehicle is assumed to be available for charging between 18:00 and 08:00, simulating typical residential charging behavior. The optimization is conducted at 1-hour intervals over a 24-hour horizon and repeated across 30 simulated days. Key algorithm parameters include a population size of 50, a maximum of 100 iterations, a migration ratio of 0.7, and a migration period of 10 iterations for MBO, and a quantum rotation angle of $\pi/30$ with a mutation rate of 0.05 for QGA. The MBO component is used for global exploration, while QGA enhances local solution refinement at the end of each migration phase. Load forecasts are generated using a Feedforward Neural Network (FNN) as described in Section 4.2, trained on historical demand, temperature, and time-of-day data. Performance is evaluated using multiple metrics, including total charging cost (in USD), user convenience index (based on state-of-charge compliance at departure), peak-to-average power ratio (PAR), and convergence speed. The proposed method is benchmarked against Particle Swarm Optimization (PSO) and traditional Genetic Algorithm (GA) to validate its efficiency and effectiveness under realistic conditions.

5.2. Experimental outputs

This section presents the key experimental results obtained from applying the GQA+MBAVOA algorithm for scheduling electric vehicle (EV) charging and discharging. The analysis covers various performance indicators essential for assessing the algorithm's effectiveness in optimizing EV energy management. First, we evaluate the total charging costs incurred by the EV fleet under different scheduling scenarios, highlighting the potential cost savings achieved through the optimized strategies. Next, the fitness values are examined to measure the quality of solutions and the algorithm's capability to effectively balance multiple optimization objectives. Additionally, we analyse user convenience metrics, such as charging station availability and waiting times, to gauge the practical usability and satisfaction experienced by EV owners with the proposed scheduling approach [41], [42]. The convergence behaviour of the algorithm is also investigated to assess how efficiently it reaches near-optimal solutions within a reasonable computational timeframe [43]. Finally, the sensitivity analysis results provide insights into the robustness of the GQA+MBAVOA algorithm, illustrating the effects of parameter variations on solution quality. Together, these experimental outputs offer a comprehensive understanding of the algorithm's performance, informing future improvements and refinements in EV energy management. Figure 3 illustrates the experimental results of the GQA+MBAVOA applied to a fleet of 100 vehicles.

5.3. Performance metrics

To evaluate the performance of the GQA+MBAVOA algorithm in EV charging and discharging scheduling, several key metrics are considered, as detailed in Section 4.3. These include:

This metric quantifies the total expenses incurred by the EV fleet during charging, serving as a direct measure of the algorithm's effectiveness in reducing overall costs [44]. This evaluates how well the scheduling solutions align with optimization goals such as cost reduction and grid stability, reflecting the quality and practicality of the generated schedules. Metrics related to user experience, including charging station availability and waiting times, are assessed to ensure the scheduling solutions meet user satisfaction and operational feasibility [45].

A detailed comparative analysis of these performance indicators is presented in Figure 4, illustrating the algorithm's behavior over multiple iterations. Figure 4a shows the charging costs across 100 iterations for various approaches: Multi-Objective Optimization, MOPSO, CSRL, PVCS, and GQA+MBAVOA [46]. The observed charging costs are 30%, 28%, 26%, 24%, and 22%, respectively, demonstrating GQA+MBAVOA's superior cost reduction capability. Figure 4b compares fitness values after 200 iterations, with Multi-Objective Optimization (MOPSO, CSRL, PVCS, and GQA+MBAVOA achieving fitness scores of 0.345, 0.187, 0.167, 0.351, and 0.134, respectively. The lower fitness value of GQA+MBAVOA indicates better overall optimization performance [47]. These metrics collectively validate the efficiency and suitability of the GQA+MBAVOA algorithm for effective EV energy management in real-world scenarios.

5.4. Comparative discussion

Further analysis over 400 iterations reveals the fitness values for different algorithms: Multi-objective optimization, MOPSO, CSRL, PVCS, and GQA+MBAVOA achieved fitness scores of 0.213, 0.209, 0.1, 0.107, and 0.101, respectively. These results, illustrated in Figure 4c, highlight the superior optimization capability of GQA+MBAVOA in producing high-quality solutions. In terms of user convenience, assessed at 100 iterations, GQA+MBAVOA also outperforms other methods. The user convenience metrics recorded are 0.336 for Multi-objective optimization, 0.342 for MOPSO, 0.365 for CSRL, 0.385 for PVCS, and 0.405 for GQA+MBAVOA, as depicted in Figure 4c. This indicates enhanced user satisfaction through reduced waiting times and better charging station availability with the proposed algorithm. A comprehensive comparative analysis of these performance metrics is summarized in Table 1, demonstrating the consistent advantage of GQA+MBAVOA over conventional optimization techniques in balancing cost, fitness, and user convenience for EV charging and discharging scheduling.

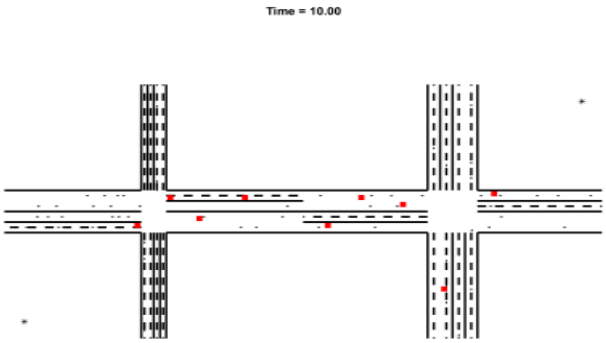


Fig. 3: Experimental Output of GQA+MBAVOA for 100 Vehicles.

Comparative assessment for 100 vehicles

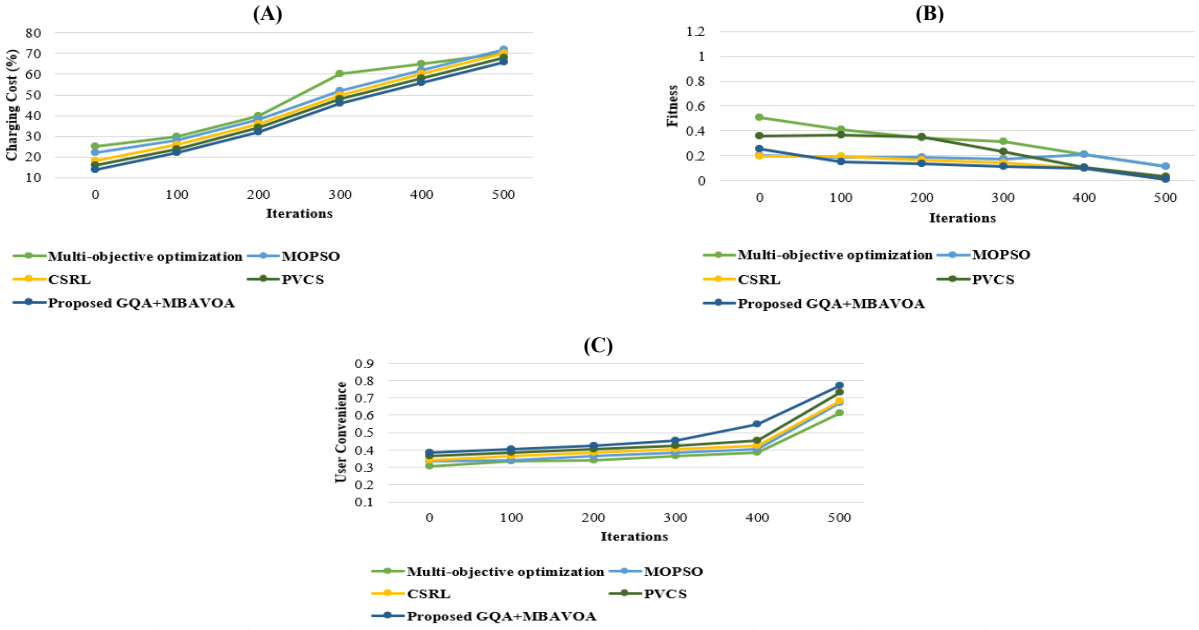


Fig. 4: Comparative Evaluation of the Proposed GQA+MBAVOA Algorithm Across Key Performance Indicators: (A) Charging Cost (USD) vs. Number of Iterations, (B) Fitness Score Across Iterations, and (C) User Convenience Level (%). Results Are Based on Simulations Conducted with A Fleet of 100 Electric Vehicles Over A 24-Hour Horizon Using Synthetic Load Demand and Dynamic Pricing Data. the Proposed Method Is Benchmarked Against Conventional QGA and MBO Approaches.

Table 1: Comparative Analysis

Vehicles	Metrics	Multi-objective optimization	MOPSO	CSRL	PVCS	GQA+MBAVOA
100 vehicles	Charging cost (%)	70	72	70	68	66
	Fitness	0.116	0.114	0.012	0.035	0.010
	User convenience	0.625	0.682	0.693	0.741	0.779

6. Conclusion

The application of the GQA+MBAVOA algorithm for scheduling electric vehicle (EV) charging and discharging presents a highly effective solution for energy management in the transportation sector. Rigorous testing demonstrates the algorithm's strong capability to minimize charging costs while simultaneously addressing multiple objectives, including peak demand reduction and user convenience. Comparative evaluations confirm its superiority over traditional heuristics and other optimization methods in both cost savings and solution quality. Additionally, improved user satisfaction metrics highlight the algorithm's success in balancing technical optimization with practical usability. Sensitivity analyses further demonstrate its robustness and scalability, indicating strong potential for real-world deployment at scale. Future research may focus on enhancing the algorithm through hybrid techniques, integrating dynamic market conditions, and expanding its adaptability to rapidly evolving energy systems. By leveraging quantum-inspired and multi-objective optimization frameworks, this approach contributes significantly to advancing sustainable, efficient, and resilient transportation energy management.

7. Discussion

The proposed hybrid optimization framework, combining MBO and QGA, effectively improves EV charging efficiency, reduces costs, and enhances user convenience. To further enhance adaptability, future research should explore integrating machine learning techniques, such as neural networks, for predictive modelling of load demand, user behaviour, and dynamic pricing. Key research directions include the real-time integration of machine learning into the optimization loop, managing trade-offs between accuracy and computational load, and developing scalable solutions for larger EV fleets. Practical deployment challenges such as computational complexity, infrastructure requirements, and secure communication also need to be addressed. Additionally, future extensions could incorporate dynamic market mechanisms, including real-time pricing and decentralized control, to further improve the responsiveness and sustainability of EV energy management systems.

References

[1] Mirjalili, S, & Mirjalili, S. M. (2016). Multi-verse optimizer: a nature-inspired algorithm for global optimization. Neural Computing and Applications, 27(2), 495-513. https://doi.org/10.1007/s00521-015-1870-7.

[2] Kennedy, J, & Eberhart, R. (1995). Particle swarm optimization. In Proceedings of IEEE International Conference on Neural Networks (Vol. 4, pp. 1942-1948). IEEE. https://doi.org/10.1109/ICNN.1995.488968.

[3] Taher, S. A, Gupta, R, & Singh, U. (2018). A hybrid genetic algorithm and particle swarm optimization for the economic emission dispatch problem. International Journal of Electrical Power & Energy Systems, 98, 385-396.

[4] T. Al-Shehari, M. Kadrie, T. Alfakih, H. Alsalman, T. Kuntavai, et al, "Blockchain with secure data transactions and energy trading model over the internet of electric vehicles," Sci. Rep, vol. 14, no. 1, p. 19208, Jan. 2024, https://doi.org/10.1038/s41598-024-69542-w.

[5] R. Vidhya, D. Banavath, S. Kayalvili, S. M. Naidu, et al, "Alzheimer's disease detection using residual neural network with LSTM hybrid deep learning models," J. Intell. Fuzzy Syst, vol. 45, no. 6, pp. 12095–12109, 2023.

[6] P. Selvam, N. Krishnamoorthy, S. P. Kumar, K. Lokeshwaran, M. Lokesh, et al, "Internet of Things Integrated Deep Learning Algorithms Monitoring and Predicting Abnormalities in Agriculture Land," Internet Technol. Lett, Nov. 2024, https://doi.org/10.3233/JIFS-235059.

[7] S. S. F. Begum, M. S. Anand, P. V. Pramila, J. Indra, J. S. Isaac, C. Alagappan, et al, "Optimized machine learning algorithm for thyroid tumour type classification: A hybrid approach Random Forest, and intelligent optimization algorithms," J. Intell. Fuzzy Syst, pp. 1–12, 2024.

[8] K. Maithili, A. Kumar, D. Nagaraju, D. Anuradha, S. Kumar, et al, "DKCNN: Improving deep kernel convolutional neural network-based covid-19 identification from CT images of the chest," J. X-ray Sci. Technol, vol. 32, no. 4, pp. 913–930, 2024. https://doi.org/10.3233/XST-230424.

[9] K. Mannanuddin, V. R. Vimal, A. Srinivas, S. D. U. Mageswari, G. Mahendran, et al, "Enhancing medical image analysis: A fusion of fully connected neural network classifier with CNN-VIT for improved retinal disease detection," J. Intell. Fuzzy Syst, vol. 45, no. 6, pp. 12313–12328, 2023. https://doi.org/10.3233/JIFS-235055.

[10] T. A. Mohanaprakash, M. Kulandaivel, S. Rosaline, P. N. Reddy, S. S. N. Bhukya, et al, "Detection of Brain Cancer through Enhanced Particle Swarm Optimization in Artificial Intelligence Approach," J. Adv. Res. Appl. Sci. Eng. Technol, vol. 33, no. 3, pp. 174–186, 2023. https://doi.org/10.37934/araset.33.2.174186.

[11] Wange N. K, Khan I, Pinnamaneni R, Cheekati H, Prasad J, et al, "β-amyloid deposition-based research on neurodegenerative disease and their relationship in elucidate the clear molecular mechanism," Multidisciplinary Science Journal, vol. 6, no. 4, pp. 2024045–2024045, 2024. https://doi.org/10.31893/multiscience.2024045.

[12] Anitha C, Tellur A, Rao K. B. V. B, Kumbhar V, Gopi T, et al, "Enhancing Cyber-Physical Systems Dependability through Integrated CPS-IoT Monitoring," International Research Journal of Multidisciplinary Scope, vol. 5, no. 2, pp. 706–713, 2024. https://doi.org/10.47857/irjms.2024.v05i02.0620.

[13] Balasubramani R, Dhandapani S, Sri Harsha S, Mohammed Rahim N, Ashwin N, et al, "Recent Advancement in Prediction and Analyzation of Brain Tumour using the Artificial Intelligence Method," Journal of Advanced Research in Applied Sciences and Engineering Technology, vol. 33, no. 2, pp. 138–150, 2023. https://doi.org/10.37934/araset.33.2.138150.

[14] Chaturvedi A, Balasankar V, Shrimali M, Sandeep K. V, et al, "Internet of Things Driven Automated Production Systems using Machine Learning," International Research Journal of Multidisciplinary Scope, vol. 5, no. 3, pp. 642–651, 2024. https://doi.org/10.47857/irjms.2024.v05i03.01033.

[15] Saravanakumar R, Arularasan A. N, Harekal D, Kumar R. P, Kaliyamoorthi P, et al, "Advancing Smart Cyber Physical System with Self-Adaptive Software," International Research Journal of Multidisciplinary Scope, vol. 5, no. 3, pp. 571–582, 2024. https://doi.org/10.47857/irjms.2024.v05i03.01013.

[16] Vidhya R. G, Surendiran J, Saritha G, "Machine Learning Based Approach to Predict the Position of Robot and its Application," Proc. Int. Conf. on Computer Power and Communications, pp. 506–511, 2022. https://doi.org/10.1109/ICCPC55978.2022.10072031.

[17] Sivanagireddy K, Yerram S, Kowsalya S. S. N, Sivasankari S. S, Surendiran J, et al, "Early Lung Cancer Prediction using Correlation and Regression," Proc. Int. Conf. on Computer Power and Communications, pp. 24–28, 2022. https://doi.org/10.1109/ICCPC55978.2022.10072059.

[18] Vidhya R. G, Seetha J, Ramadass S, Dilipkumar S, Sundaram A, Saritha G, "An Efficient Algorithm to Classify the Mitotic Cell using Ant Colony Algorithm," Proc. Int. Conf. on Computer Power and Communications, pp. 512–517, 2022. https://doi.org/10.1109/ICCPC55978.2022.10072277.

[19] Sengeni D, Muthuraman A, Vurukonda N, Priyanka G, et al, "A Switching Event-Triggered Approach to Proportional Integral Synchronization Control for Complex Dynamical Networks," Proc. Int. Conf. on Edge Computing and Applications, pp. 891–894, 2022. https://doi.org/10.1109/ICECAA55415.2022.9936124.

[20] Vidhya R. G, Rani B. K, Singh K, Kalpanadevi D, Patra J. P, Srinivas T. A. S, "An Effective Evaluation of SONARS using Arduino and Display on Processing IDE," Proc. Int. Conf. on Computer Power and Communications, pp. 500–505, 2022. https://doi.org/10.1109/ICCPC55978.2022.10072229.

[21] Kushwaha S, Boga J, Rao B. S. S, Taqui S. N, et al, "Machine Learning Method for the Diagnosis of Retinal Diseases using Convolutional Neural Network," Proc. Int. Conf. on Data Science, Agents & Artificial Intelligence, 2023, pp. 1–.https://doi.org/10.1109/ICDSAAI59313.2023.10452440.

[22] Maheswari B. U, Kirubakaran S, Saravanan P, Jeyalaxmi M, Ramesh A, et al, "Implementation and Prediction of Accurate Data Forecasting Detection with Different Approaches," Proc. 4th Int. Conf. on Smart Electronics and Communication, 2023, pp. 891–897. https://doi.org/10.1109/ICOSEC58147.2023.10276331.
[23] Mayuranathan M, Akilandasowmya G, Jayaram B, Velrani K. S, Kumar M, et al, "Artificial Intelligent based Models for Event Extraction using Customer Support Applications," Proc. 2nd Int. Conf. on Augmented Intelligence and Sustainable Systems, 2023, pp. 167–172. https://doi.org/10.1109/ICAISS58487.2023.10250679.
[24] Gold J, Maheswari K, Reddy P. N, Rajan T. S, Kumar S. S, et al, "An Optimized Centric Method to Analyze the Seeds with Five Stages Technique to Enhance the Quality," Proc. Int. Conf. on Augmented Intelligence and Sustainable Systems, 2023, pp. 837–842. https://doi.org/10.1109/ICAISS58487.2023.10250681.
[25] Anand L, Maurya J. M, Seetha D, Nagaraju D, et al, "An Intelligent Approach to Segment the Liver Cancer using Machine Learning Method," Proc. 4th Int. Conf. on Electronics and Sustainable Communication Systems, 2023, pp. 1488–1493. https://doi.org/10.1109/ICESC57686.2023.10193190.
[26] Harish Babu B, Indradeep Kumar, et al, "Advanced Electric Propulsion Systems for Unmanned Aerial Vehicles," Proc. 2nd Int. Conf. on Sustainable Computing and Smart Systems (ICSCSS), 2024, pp. 5–9, IEEE. https://doi.org/10.1109/ICSCSS60660.2024.10625489.
[27] Jagan Raja V, Dhanamalar M, Solaimalai G, et al, "Machine Learning Revolutionizing Performance Evaluation: Recent Developments and Breakthroughs," Proc. 2nd Int. Conf. on Sustainable Computing and Smart Systems (ICSCSS), 2024, pp. 780–785, IEEE. https://doi.org/10.1109/ICSCSS60660.2024.10625103.
[28] Sivasankari S. S, Surendiran J, Yuvaraj N, et al, "Classification of Diabetes using Multilayer Perceptron," Proc. IEEE Int. Conf. on Distributed Computing and Electrical Circuits and Electronics (ICDCECE), 2022, pp. 1–5, IEEE. https://doi.org/10.1109/ICDCECE53908.2022.9793085.
[29] Anushkannan N. K, Kumbhar V. R, Maddila S. K, et al, "YOLO Algorithm for Helmet Detection in Industries for Safety Purpose," Proc. 3rd Int. Conf. on Smart Electronics and Communication (ICOSEC), 2022, pp. 225–230, IEEE. https://doi.org/10.1109/ICOSEC54921.2022.9952154.
[30] Reddy K. S, Vijayan V. P, Das Gupta A, et al, "Implementation of Super Resolution in Images Based on Generative Adversarial Network," Proc. 8th Int. Conf. on Smart Structures and Systems (ICSSS), 2022, pp. 1–7, IEEE. https://doi.org/10.1109/ICSSS54381.2022.9782170.
[31] Joseph J. A, Kumar K. K, Veerraju N, Ramadass S, Narayanan S, et al, "Artificial Intelligence Method for Detecting Brain Cancer using Advanced Intelligent Algorithms," Proc. Int. Conf. on Electronics and Sustainable Communication Systems, 2023, pp. 1482–1487. https://doi.org/10.1109/ICESC57686.2023.10193659.
[32] Surendiran J, Kumar K. D, Sathiya T, et al, "Prediction of Lung Cancer at Early Stage Using Correlation Analysis and Regression Modelling," Proc. 4th Int. Conf. on Cognitive Computing and Information Processing, 2022, pp. 1–.https://doi.org/10.1109/CCIP57447.2022.10058630.
[33] Goud D. S, Varghese V, Umare K. B, Surendiran J, et al, "Internet of Things-based Infrastructure for the Accelerated Charging of Electric Vehicles," Proc. Int. Conf. on Computer Power and Communications, 2022, pp. 1–6. https://doi.org/10.1109/ICCPC55978.2022.10072086.
[34] Vidhya R. G, Singh K, Paul J. P, Srinivas T. A. S, Patra J. P, Sagar K. V. D, "Smart Design and Implementation of Self-Adjusting Robot using Arduino," Proc. Int. Conf. on Augmented Intelligence and Sustainable Systems, 2022, pp. 1–6. https://doi.org/10.1109/ICAISS55157.2022.10011083.
[35] Vallathan G, Yanamadni V. R, et al, "An Analysis and Study of Brain Cancer with RNN Algorithm-based AI Technique," Proc. Int. Conf. on I-SMAC (IoT in Social, Mobile, Analytics and Cloud), 2023, pp. 637–642. https://doi.org/10.1109/I-SMAC58438.2023.10290397.
[36] Vidhya R. G, Bhoopathy V, Kamal M. S, Shukla A. K, Gururaj T, Thulasimani T, "Smart Design and Implementation of Home Automation System using Wi-Fi," Proc. Int. Conf. on Augmented Intelligence and Sustainable Systems, 2022, pp. 1203–1208. https://doi.org/10.1109/ICAISS55157.2022.10010792.
[37] Vidhya R, Banavath D, Kayalvili S, Naidu S. M, Prabu V. C, et al, "Alzheimer's Disease Detection using Residual Neural Network with LSTM Hybrid Deep Learning Models," J. Intelligent & Fuzzy Systems, 2023; vol. 45, no. 6, pp. 12095–12109. https://doi.org/10.3233/JIFS-235059.
[38] Balasubramaniyan S, Kumar P. K, Vaigundamoorthi M, Rahuman A. K, et al, "Deep Learning Method to Analyze the Bi-LSTM Model for Energy Consumption Forecasting in Smart Cities," Proc. Int. Conf. on Sustainable Communication Networks and Application, 2023, pp. 870–876https://doi.org/10.1109/ICSCNA58489.2023.10370467.
[39] Somani V, Rahman A. N, Verma D, et al, "Classification of Motor Unit Action Potential Using Transfer Learning for the Diagnosis of Neuromuscular Diseases," Proc. 8th Int. Conf. on Smart Structures and Systems (ICSSS), 2022, pp. 1–7, IEEE. https://doi.org/10.1109/ICSSS54381.2022.9782209.
[40] Vidhya R. G, Saravanan R, Rajalakshmi K, "Mitosis Detection for Breast Cancer Grading," Int. J. Advanced Science and Technology, 2020; vol. 29, no. 3, pp. 4478–4485.
[41] Gupta D, Kezia Rani B, Verma I, et al, "Metaheuristic Machine Learning Algorithms for Liver Disease Prediction," Int. Res. J. Multidisciplinary Scope, 2024; vol. 5, no. 4, pp. 651–660. https://doi.org/10.47857/irjms.2024.v05i04.01204.
[42] Sudhagar D, Saturi S, Choudhary M, et al, "Revolutionizing Data Transmission Efficiency in IoT-Enabled Smart Cities: A Novel Optimization-Centric Approach," Int. Res. J. Multidisciplinary Scope, 2024; vol. 5, no. 4, pp. 592–602. https://doi.org/10.47857/irjms.2024.v05i04.01113.
[43] Vidhya R. G, Batri K, "Segmentation, Classification and Krill Herd Optimization of Breast Cancer," J. Medical Imaging and Health Informatics, 2020; vol. 10, no. 6, pp. 1294–1300. https://doi.org/10.1166/jmihi.2020.3060.
[44] Thupakula Bhaskar، K. Sathish، D. Rosy Salomi Victoria, Er.Tatiraju. V. Rajani Kanth, Uma Patil, Naveen Mukkapati , Sanjeevkumar Angadi, P Karthikeyan. R G Vidhya, Hybrid deep learning framework for enhanced target tracking in video surveillance using CNN and DRNN-GWO, 2025, International Journal of Basic and Applied Sciences, vol 14, no 1, pp. 208-215. https://doi.org/10.14419/wddeck70.
[45] Thupakula Bhaskar, Hema N, R. Rajitha Jasmine, Pearlin, Uma Patil, Madhava Rao Chunduru, P.Saravanan , Venkatesh Kanna T, R G Vidhya, an adaptive learning model for secure data sharing in decentralized environments using blockchain technology, 2025, International Journal of Basic and Applied Sciences, vol 114, no1, pp. 216-221. https://doi.org/10.14419/9f4z3q54.
[46] Denis R, N. Venkateswaran, S. Gangadharan, M. Shunmugasundaram, Guduri Chitanya, Girija M. S, V. V. Satyanarayana Tallapragada, R. G. Vidhya, A Federated Learning and Blockchain Framework for IoMT-Driven Healthcare 5.0, International Journal of Basic and Applied Sciences, 2025, vol 14, no 1, pp. 246-250. https://doi.org/10.14419/n1npsj75.
[47] Chintureena Thingom, Martin Margala, S Siva Shankar, Prasun Chakrabarti, RG Vidhya, Enhanced Task Scheduling in Cloud Computing Using the ESRNN Algorithm: A Performance-Driven Approach, Internet Technology Letters. 2025, vol 8, no 4, pp. e70037. https://doi.org/10.1002/itl2.70037.