International Journal of Basic and Applied Sciences, 14 (SI-1) (2025) 157-161

International Journal of Basic and Applied Sciences

Website: www.sciencepubco.com/index.php/IJBAS
https://doi.org/10.14419/wfwr0045
Research paper

Analysis of Ship Structural Integrity Under Various Loading Conditions

Yeshwanth Raj *, Rajendran Palanivelu

Department of Nautical Science, AMET University, Kanathur, Tamil Nadu, India
**Corresponding author E-mail: yeswanthraj@ametuniv.ac.in*

Received: May 10, 2025, Accepted: May 29, 2025, Published: July 7 2025

Abstract

One of the main ways that ship structures fail is through fatigue damage. Usually, this type of damage starts at the structure's weak points, such as welded joints, cracks, and concentrated stress points. The primary focus of this study is fatigue damage that ships experience over their operating lifespan as a result of cyclic stress, especially from waves. Though some are merely approximations, there are numerous ways to different sea state situations. The most popular methods will be reviewed, including their strengths and weaknesses. Some of the major theoretical methods discussed are energy spectrum methods in frequency and time domains, which estimate fatigue life based on wave-related energy, amplitude, and wave loads. In addition, the evaluation of cyclic stress in specific hull girder and welded joint features through finite element analysis will be presented to quantify the maximum stress range for future fatigue testing.

Keywords: *Ship Structural; Loading Conditions; Shipbuilding.*

1. Introduction

Constant cyclic loads are a defining feature of the operational life of offshore structures and ships [2]. These stresses have the potential to accelerate existing fatigue cracks in hull structures, which put structural integrity at risk and lead to fatigue failure. Once a crack begins and develops, even low-stress cycles that would otherwise have little effect on undamaged structures have the potential to result in a fracture, emphasizing the need for observing and repairing fatigue cracks to avoid complete failures. Welded joints are the most susceptible structural components and are widely used in shipbuilding [1].

This review study stands out for combining cutting-edge numerical algorithms with conventional methods to improve the accuracy of fatigue life prediction, in addition to summarizing current approaches. The current study also investigates the influence of the different sea states on the welded joints and other significant factors not taken into account by traditional research. It also addresses the most common methods for determining the loads distribution and predicting structural response to the different sea states with the aim of assessing the fatigue behaviors of ship structures. Since they are especially susceptible to fatigue damage by potential crack-like defects, welded joints receive additional attention. It also describes how fatigue failure processes are identified and shown using the finite element technique (FEM) [10]. The innovative discussions in this study may serve as a foundation for a theoretical or numerical model that employs finite element analysis to forecast ship structure fatigue life [11].

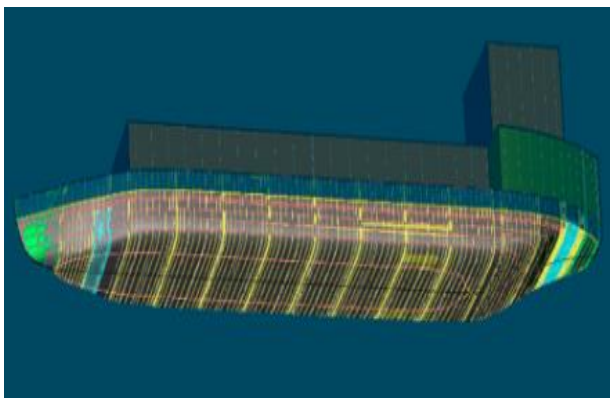


Fig. 1: Structural Analysis for Different Load Distribution.

Copyright © Yeshwanth Raj, Rajendran Palanivelu. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

It further discusses some of the key notions such as spectral energy of the wave system, frequency and time domain wave modelling, and loads caused by the waves [12]. Furthermore, it portrays the key theory methods for quantifying fatigue strength, such as determining load distribution and estimating weld joint and structure member fatigue life [7]. The paper only mentions collision damage and environmental concern in passing [4]. For instance, stress concentrations which speed up crack growth are caused by initial impact damage due to collisions [6]. Also, welded joints that are environmentally degraded may be stronger than unexposed counterparts, which then would be weaker than needed under cyclic loading. This research focuses on secondary influences on fatigue behaviors, not as isolation failure mechanisms. The study describes how properties of the materials impacted by welds and ship structure fatigue behavior influence each other [3].Lastly, Section 6 concentrates on creating trustworthy fatigue strength evaluation standards for real-time hull girder stress monitoring in both the frequency and temporal domains.

Although spectral methods such as Bretschneider and JONSWAP are capable of modeling wave environments over longer time periods, JONSWAP is more accurate for predicting developing seas because of its adjustable peak enhancement factor. Strip theory works well for moderate sea states, but badly under slamming or other nonlinear condition. On the other hand, finite element analysis (FEA) is crucial when analyzing welds and critical joints because it models localized stress concentrations very accurately. On the downside, FEA requires a lot of computational power for global assessments. Spectral methods are preferable in extensive fatigue assessments due to their broad coverage, while FEA applies in precise assessment of major structural flaws. The two together provide an optimal ship-assessment solution as both tools deliver complementary information on ship integrity.

2. Materials and methods

It is difficult to estimate and analyse wave-induced fatigue loads because they are dynamic and irregular. Irregular wave theories themselves are capable of predicting and explaining the intricate nature of ocean waves [8]. In contrast to ideal waves, actual ocean waves are unstable and dependent upon several environmental conditions, including wind direction, currents, and seafloor topography [16].

Studies have established the sources of uncertainty in wave elevation spectrum representation of stationary short-term sea states. Mathematical models have been used to assess the variance uncertainty of stress response based on various wave characteristics and spectrum forms [5].

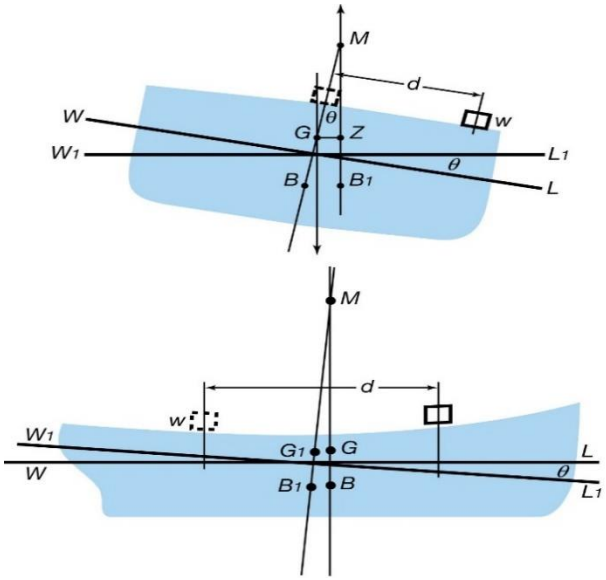


Fig. 2: A) System Model.

Stress concentration factors (SCFs): Through the consideration of higher stress near features such as welds and notches, these factors identify locations that are more likely to experience higher levels of stress and be subjected to fatigue conditions [13].

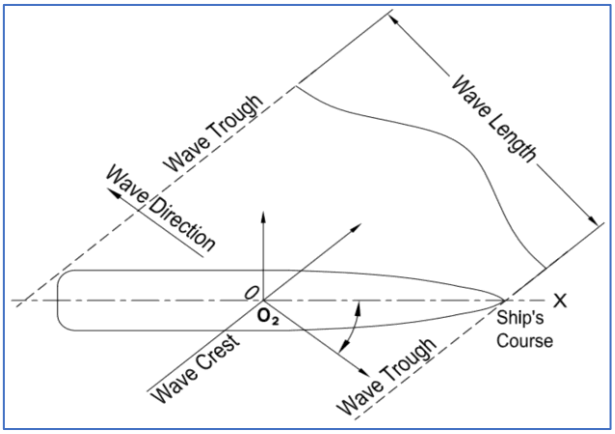


Fig. 3: B) Linear Longitudinal Strength Analysis.

This technique helps to analyse the overall fatigue life of the structure and to predict potential failure. Various methods have been suggested by researchers to estimate and predict the impact of damage on ships. The study proved that even after damage, some cross-sections could still be subjected to much higher loads than the original design loads, although they did not suffer structural damage. They used numerical simulations to study the deformation mechanics of key structural members. A new model was formed to analyse the stiffeners and hull shell plating subjected to heavy lateral impact. The weld's quality is very important. Welds done incorrectly might cause stress concentrations and shorten fatigue life.

3. Results and discussion

It has been established by research that wave-induced loads, particularly in the longitudinal hull girder deck and ship sides' structural elements, are the primary causes of fatigue failure. The structure is subjected to diverse and complex loads from wave movement [14].

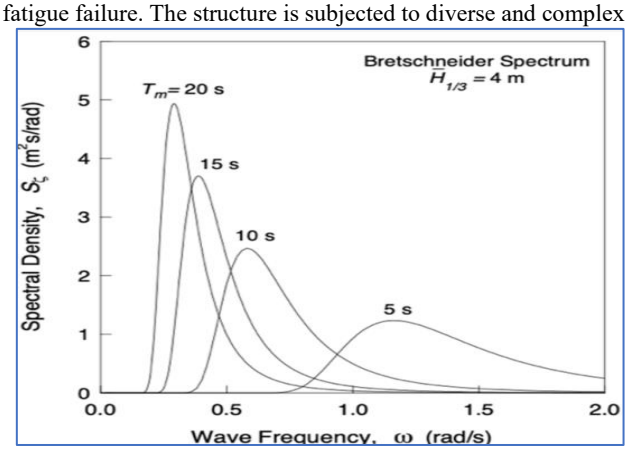


Fig. 4: Bretschneider Spectrum for Different Values of the Peak Period.

Ship design utilizes theoretical wave spectra rather than observed records of the irregular waves in the case of the energy spectrum.

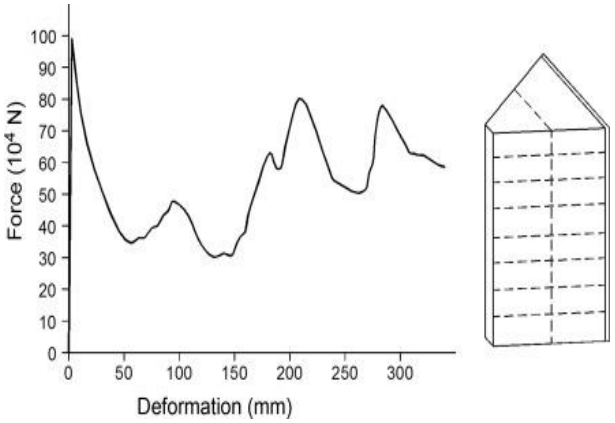


Fig. 5: Ship Structure.

A time series, whether narrow-band or wide-band processes, shows the wave amplitude in terms of time and wave period. In a narrow-band process, the wave energy is high within a limited frequency band and low for other frequencies, as indicated by the corresponding marine spectrum. This is similar to a variable amplitude harmonic wave component. Consequently, the mean zero-crossing interval is almost the same as the mean time between peaks, reflecting a fairly uniform wave pattern [9].

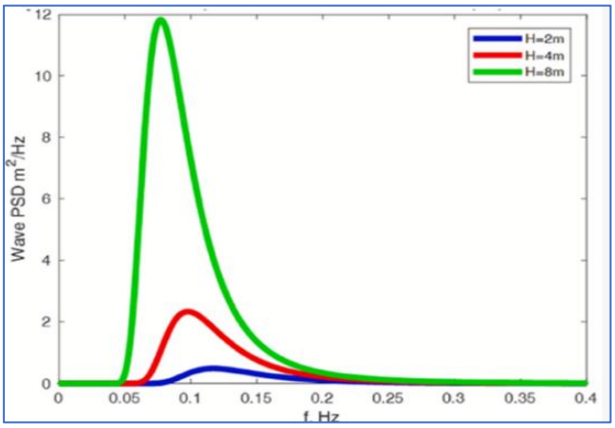


Fig. 6: Pierson–Moskowitz Spectrum for Three Wave Heights

Determine each local peak (maximum) and trough (minimum) in the stress history. These locations are crucial because they could be the beginning and end of stress cycles.

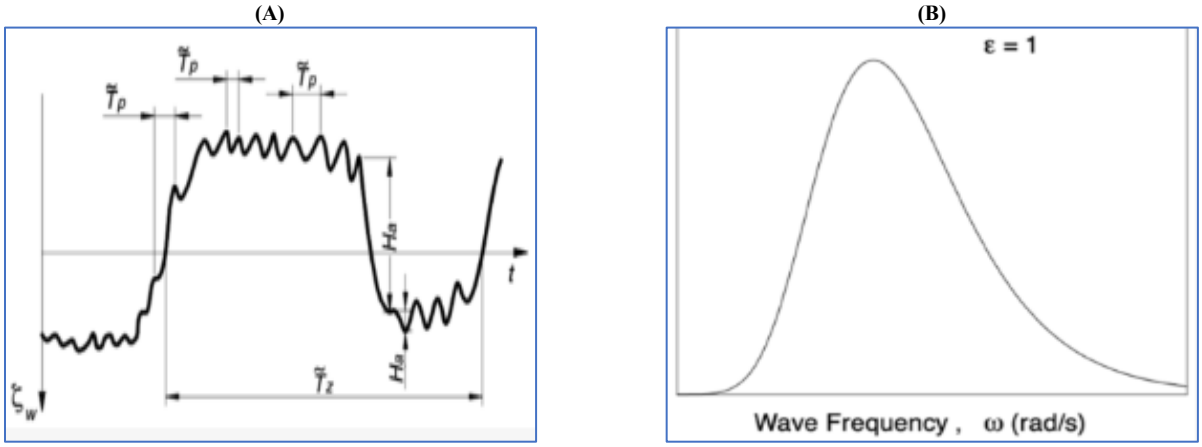


Fig. 7: Wide-Band Time Series and the Related Frequency Spectrum.

The "strip theory" method idealizes the ship composed of multiple prismatic pieces or strips with a linear superposition method. The ship is first considered as a slender body with gradually varying cross-sections along the length, with a draft and width much smaller than the length [15].

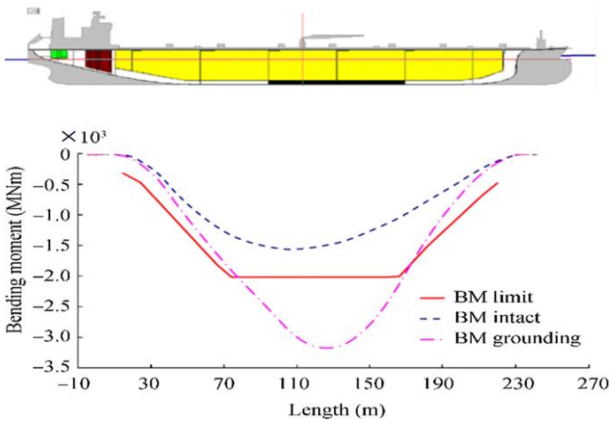


Fig. 8: Structural Reliability Analysis.

By taking the moderate forward speeds and sufficiently high frequencies, the transverse fluid particle velocity can be approximated to be significantly larger than the longitudinal velocity. One of the biggest advantages of strip theory is its linearity assumption, which enables one to use spectral methods. Superposition can be utilized to calculate the total response to an uneven sea state as ship response (motions, stresses) to regular waves is linear.

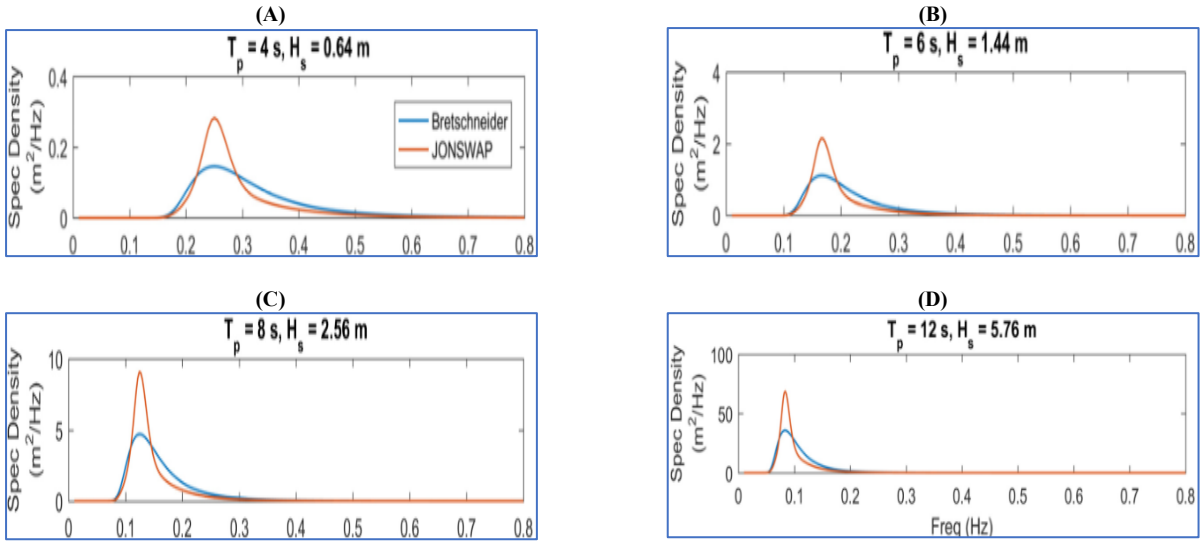


Fig. 9: Comparison between JONSWAP and Bretschneider Spectra.

Figure 8 shows the comparison between JONSWAP and Bretschneider Spectra. It demonstrates why JONSWAP is more useful in constructing developed seas because of its peakedness. This difference is very important in fatigue analysis, due to how spectrum selection influences stress range computations. Likewise, spectral energy as a function of peak period and wave height is shown in Figures 3 and 5

which directly influence the estimation of fatigue damage. It is critical that ΔσN is determined based on context; otherwise it will result in reliance on generalized spectrum leading to overestimation or underestimation of stress cycles.To follow the flow of stress, imagine the history of stress as a range of mountains with rainwater flowing down the mountains. The "water" moves from one peak to the next valley, as long as it doesn't encounter a higher or lower peak, where a new cycle is finished and started. A half-cycle is a completed movement from one peak to a valley or vice versa. Two half-cycles constitute one full cycle.

4. Conclusions

Their theoretical basis supports wide applicability so that different sea states in diverse parts of the world can be described precisely. The principles and practices of ship structural design are closely related to the needs for warships that are more effective, quicker, lighter, and less expensive. Ship safety and economic success are largely dependent on clever structural design that balances environmental concerns, effective life-cycle maintenance, enhanced fabrication techniques, and the utilization of novel materials. The structural design process, which is founded on rational ship structural analysis and gets its strength and scope from contemporary computing techniques and tools, is given more and more weight as a result of all these demands. The overall failure will happen entirely within a module if all of the modules are of a sufficient length. By placing the boundaries at the main transverse bulkheads, the interactions between individual modules can be reduced. Modules should be described such that hull girder analysis can produce a full set of boundary conditions for each in order to evaluate them separately. The minimal length of a module is determined by the boundary circumstances and the accurate depiction of hull girder reaction. With the analysis of real-time stress and fatigue data regarding a ship's structure, future research should look into creating machine learning models that generate predictive maintenance systems. Looking into high-toughness steel alloys or fatigue-resistant composites could advance structural durability greatly. In addition, moving towards having embedded sensor systems for real-time hull stress monitoring would improve more practical-safety operations on board ships as compared to relying solely on simulation-based fatigue prediction methods..

References

[1] Akpan, U. O., Koko, T. S., Ayyub, B., & Dunbar, T. E. (2002). Risk assessment of aging ship hull structures in the presence of corrosion and fatigue. *Marine structures*, *15*(3), 211-231. https://doi.org/10.1016/S0951-8339(01)00030-2.

[2] Ghate, A. D., Roy, J., & Negi, G. S. (2025). Developments in bioacoustics monitoring for management of marine mammal presence in shipping lanes. *International Journal of Aquatic Research and Environmental Studies, 5*(1), 548–557. https://doi.org/10.70102/IJARES/V5I1/5-1-51.

[3] Hirdaris, S. E., Bai, W., Dessi, D., Ergin, A., Gu, X., Hermundstad, O. A., ... & Incecik, A. (2014). Loads for use in the design of ships and offshore structures. *Ocean engineering*, *78*, 131-174. https://doi.org/10.1016/j.oceaneng.2013.09.012.

[4] Nugraha, I. G. D., Ashadi, E. Z., & Efendi, A. M. (2024). Performance Evaluation of Collision Avoidance for Multi-node LoRa Networks based on TDMA and CSMA Algorithm. Journal of Wireless Mobile Networks, Ubiquitous Computing, and Dependable Applications, 15(1), 53-74. https://doi.org/10.58346/JOWUA.2024.I1.005.

[5] Leheta, H. W., Badran, S. F., & Elhanafi, A. S. (2015). Ship structural integrity using new stiffened plates. *Thin-Walled Structures*, *94*, 545-561. https://doi.org/10.1016/j.tws.2015.05.018.

[6] Sun, C. (2023). The Bit Query for Labels in a Binary Tree-Based Anti-Collision Recognition Algorithm. Indian Journal of Information Sources and Services, 13(2), 68–75. https://doi.org/10.51983/ijiss-2023.13.2.3853

[7] Agarwal, A., & Yadhav, S. (2023). Structure and Functional Guild Composition of Fish Assemblages in the Matla Estuary, Indian Sundarbans. Aquatic Ecosystems and Environmental Frontiers, 1(1), 16-20.

[8] Perera, M., Madugalla, A., & Chandrakumar, R. (2022). Ultra-short waves using beam transmission methodology. *National Journal of Antennas and Propagation, 4*(1), 1–7.

[9] Firdaus, M. I., & Adiputra, R. (2024). Deterioration and imperfection of the ship structural components and its effects on the structural integrity: A review. *Curved and Layered Structures*, *11*(1), 20240008. https://doi.org/10.1515/cls-2024-0008.

[10] Firouzi, K.A., & Hashempour, H. (2021). The Mechanism of the Effects of Increasing the Length of the Piles Under Lateral Loads in Sand. *Archives for Technical Sciences, 2*(25), 43–52. https://doi.org/10.7251/afts.2021.1325.043F.

[11] Tekgoz, M., Garbatov, Y., & Soares, C. G. (2020). Review of ultimate strength assessment of ageing and damaged ship structures. *Journal of Marine Science and Application*, *19*, 512-533. https://doi.org/10.1007/s11804-020-00179-7.

[12] Shahmordi, S. (2016). Detection of fault location on transmission systems using Wavelet transform. International Academic Journal of Science and Engineering, 3(1), 23–32.

[13] Ozguc, O., Das, P. K., & Barltrop, N. (2005). A comparative study on the structural integrity of single and double side skin bulk carriers under collision damage. *Marine Structures*, *18*(7-8), 511-547. https://doi.org/10.1016/j.marstruc.2006.01.004.

[14] Jurišić, P., Parunov, J., & Garbatov, Y. (2017). Aging effects on ship structural integrity. *Brodogradnja: An International Journal of Naval Architecture and Ocean Engineering for Research and Development*, *68*(2), 15-28. https://doi.org/10.21278/brod68202.

[15] Moan, T. (2020). Integrity management of offshore structures with emphasis on design for structural damage tolerance. *Journal of offshore mechanics and arctic engineering*, *142*(3), 031104. https://doi.org/10.1115/1.4045373.

[16] Nair, A., Sivaprasad, K., & Nandakumar, C. G. (2017). Crack assessment criteria for ship hull structure based on ship operational life. *Cogent Engineering*, *4*(1), 1345044. https://doi.org/10.1080/23311916.2017.1345044.