International Journal of Basic and Applied Sciences, 14 (2) (2025) 441-451

International Journal of Basic and Applied Sciences

Website: www.sciencepubco.com/index.php/IJBAS
https://doi.org/10.14419/fs83b471
Research paper



Intelligent 3D Printing Algorithms: Accelerating Additive Manufacturing with Precision and Defect-Free Fabrication

M. Kathiravan [1], Kishore Kunal [2], Vairavel Madeshwaren [3] *, Pillalamarri Lavanya [4], Veeramani Ganesan [5], Sheifali Gupta [6]

[1] *Professor, Dapartment of Computer Science, Saveetha Institute of Medical and Technical Sciences (SIMATS),TamilNadu, India*
[2] *Professor of Business Analytics, Loyola Institute of Business Administration, Chennai, TamilNadu, India*
[3] *Department of Agriculture Engineering, Dhanalakshmi Srinivasan College of Engineering, Coimbatore, TamilNadu, India*
[4] *Assistant Professor, Department of Physics & Electronics, Bhavan's Vivekananda College of Science, Humanities and Commerce, Telangana, India*
[5] *Professor, Department of Management and Business Administration, Jeppiaar Institute of Technology, Sunguvarchatram, Sriperumbudur, TamilNadu, India*
[6] *Chitkara University Institute of Engineering and Technology, Chitkara University, Punjab, India*
**Corresponding author E-mail: phdannauniv2020@gmail.com*

Received: May 15, 2025, Accepted: June 20, 2025, Published: June 27, 2025

Abstract

Additive Manufacturing (AM) has transformed modern production by enabling the fabrication of complex geometries with enhanced material efficiency. However, traditional 3D printing techniques often face challenges such as incomplete fusion, material inconsistencies, and thermal warping, which affect overall quality and productivity. This study introduces an intelligent 3D printing framework that integrates Artificial Intelligence (AI) to enable real-time monitoring, defect detection, and adaptive process control, thereby addressing these limitations. The proposed system utilizes Convolutional Neural Networks (CNNs) for computer vision-based quality inspection, enabling the detection of structural anomalies during the printing process. Reinforcement Learning (RL) is employed for dynamic adjustment of parameters like nozzle temperature, deposition speed, and material feed rate in response to real-time feedback, significantly reducing defect occurrence. Adaptive machine learning algorithms like Random Forests and Gradient Boosting also facilitate process optimization and predictive maintenance. Stereolithography (SLA), Selective Laser Sintering (SLS) and Fused Deposition Modeling (FDM) are among the AM platforms that use this AI-AI-enhanced closed-loop control approach. Material use, energy efficiency, production time, print quality and defect mitigation have all significantly improved, as confirmed by experimental validation. With its ability to guarantee accuracy and dependability in contemporary 3D printing processes, the framework shows great promise for developing industrial and biomedical applications.

Keywords: *3D Printing; Additive Manufacturing; Predictive Maintenance; Artificial Intelligence; Defect Detection; Adaptive Control.*

1. Introduction

The modern manufacturing landscape has been fundamentally altered by additive manufacturing (AM), commonly referred to as 3D printing, which makes it possible to produce incredibly complex structures with minimal material waste. AM provides unparalleled efficiency and design flexibility for a variety of applications, including aerospace and biomedicine. Even so, there are still persistent issues with traditional 3D printing techniques, such as incomplete material fusion, dimensional errors, and thermal deformation. Along with jeopardizing the structural integrity of the finished product, these issues also limit AMs' widespread use in vital applications. Artificial Intelligence (AI) integration into the AM process has emerged as a recent research endeavor to address these constraints. The accuracy and dependability of 3D printing systems could be greatly increased by utilizing AI in the form of intelligent monitoring, defect prediction, and autonomous process control. With the help of computer vision and reinforcement learning, this study presents a novel AI-powered framework that can dynamically optimize the printing process and identify flaws in real time. This research fills the gap between the demands of precision manufacturing and the limitations of traditional AM by developing a closed-loop system that continuously adjusts printing parameters based on feedback. In addition to increasing product quality, the resulting intelligent AM system promotes sustainability by using less energy and materials (Fig. 1).

Copyright © M. Kathiravan et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

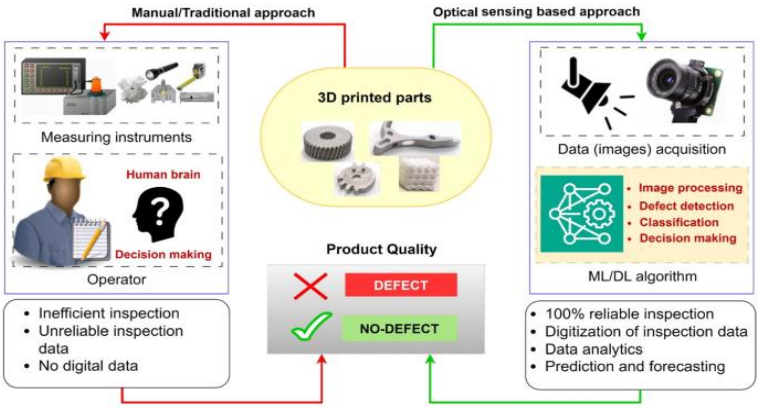


Fig. 1: Comparison between Traditional and AI-Integrated Additive Manufacturing Systems.

Artificial intelligence (AI) and machine learning (ML) technologies are revolutionizing additive manufacturing (AM), also known as 3D printing, by offering sophisticated solutions for a wide range of issues across the entire production process. AM offers a unique combination of design materials and manufacturing while avoiding complex production steps and unnecessary infrastructure by employing a bottom-up stacking approach. However, the uncertainties brought about by the inherent complexities resulting from multi-scale factors like material characteristics, parameter settings, and process stability make it imperative to contain and evaluate automated production processes. The sources state that artificial intelligence (AI) has emerged as a crucial tool for managing massive datasets, enabling pattern recognition and solution generation in AM. Additionally, it has transformed several fields such as defect detection. This integration is seen as a collaborative synergy that could revolutionize the design and production of AM-printed parts [1]. AI, including machine learning (ML) and deep learning (DL) has shown unparalleled potential in analyzing intricate data patterns and offering predictive analytics to identify and reduce flaws in quality assurance and defect detection, which is a key area of focus. AI-driven approaches to quality assurance offer accuracy, speed and scalability in contrast to labor-intensive traditional methods that struggle with complex geometries.

Research shows that machine learning (ML) and deep learning (DL) methods, especially convolutional neural networks (CNNs), are effective at detecting defects in real-time data. For example, one study used YOLOv8, a cutting-edge single-stage object detection algorithm, to detect misalignments in continuous carbon fiber-reinforced polymer (cCFRP) specimens with an astounding 94 percent accuracy rate by fine-tuning nozzle temperature adjustments.

Additionally, this study showed that print bed temperature, feed amount and feed rate had little effect on fine-tuning the model for the best parameter identification, but nozzle temperature had a significant impact on misalignment errors. Additional topics covered in the sources include the creation of sophisticated AI systems for in situ defect correction and real-time monitoring. Using a variational autoencoder model for deep learning (DL)-based anomaly detection and reinforcement learning (RL)-based optimization procedures, one study created a 3D printing system that is both extremely productive and flawless. Using an autocalibration algorithm in tandem with the DL system, this system applies real-time correction while analyzing unpredictable defect factors through image-based anomaly detection [2].

To maximize printing speed and reduce deflection-related failures, RL is also used to create optimized printing speeds from virtual simulations based on physics-based engineering models. Beyond defect detection, ML is being widely used to reveal complex relationships between a variety of parameters in different AM techniques. It is particularly good at identifying intricate patterns from large, carefully curated datasets which reveal latent knowledge that is essential for making well-informed decisions during the AM process [3]. Several AM subprocesses, such as pre-processing, design parameter optimization, anomaly detection, in-situ monitoring and post-processing stages, are investigating the integration of ML applications. Additionally, the difficulties and possible solutions for standardizing these integrated techniques are being recognized. The AM landscape has been greatly impacted by the introduction of Industry 4 0 principles mainly through the incorporation of digital twins (DT) and artificial intelligence [4].

Although the limitations of current intelligent AM (IAM) systems include fragmented AI tool usage and suboptimal human-machine interaction, a hierarchical framework with integrated layers, including knowledge generative solution, operational and cognitive layers, is proposed as a step towards autonomous AM. Artificial intelligence (AI) agents in the cognitive layer allow machines to autonomously observe, analyze plan and carry out tasks, increasing productivity and opening up new possibilities, particularly in fields like in-space manufacturing. It is thought that human expertise and advanced autonomy will coexist in a symbiotic relationship in the future of AM, creating a manufacturing ecosystem that is more resilient and adaptive [5].

Techniques related to computer vision (CV) a crucial aspect of artificial intelligence, are becoming more and more important in AM. Using both conventional machine learning and effective deep learning techniques, CV can attain a multi-level comprehension of the real world by utilizing information-rich cross-media data, including pictures, videos and three-dimensional models [6]. Global perception, real-time monitoring, virtual simulation and quality assessment of machining operations all depend on the natural integration of CV and AM. CV in AM is used for in situ inspection and law exploration during manufacturing material characteristics perception and stacking process simulation prior to project implementation and product evaluation, and defect detection following processing [7].

Additionally, the sources explore AM methods. For example, because laser-based additive manufacturing (LAM) involves multiphysics interactions and multiscale phenomena, artificial intelligence (AI) is showing promise as a tool to improve monitoring and control. To guarantee ideal part quality, increased efficiency, and decreased human intervention, research is concentrated on creating AI-based controllers for autonomous manufacturing systems that can self-monitor and self-correct. The basic ideas of metal additive manufacturing and the key process mechanisms that result in defect formation are discussed in Directed Energy Deposition [8].

Additionally, process evaluation and non-destructive testing techniques—sophisticated machine-vision-based geometric analysis techniques—are examined. As a roadmap for creating Digital Twins in Laser-Powder-based Directed Energy Deposition, the integration of data analytics, multiphysics simulation models, and process monitoring is also covered [9]. Additionally, machine learning is helping to speed up the process of developing materials for AM, which is normally a difficult task that requires a lot of time and resources. Process-structure-properties (PSP) relationships can be explored effectively by quickly screening a variety of chemical compositions and processing conditions using high-throughput 3D printing and material characterization protocols in conjunction with explainable machine learning techniques. A new era of manufacturing innovation is being shaped by the combination of 4D/3D printing technologies and machine learning [10].

To design customization, material selection process control, and quality assurance, machine learning (ML) is essential. This allows for the creation of intelligent self-adaptive structures that can change over time. 30 Dot Predictive algorithms are being used to improve the efficiency, sustainability, and dependability of these printing processes with applications in a variety of industries [11]. The creation of three-dimensional structures via additive manufacturing (AM) is becoming more and more significant in the field of bone tissue engineering (BTE), with permeability and mechanical qualities being essential specifications for BTE scaffolds. The simultaneous effects of printing parameters like layer thickness, delay time, and print orientation on the compressive strength and porosity of scaffolds have been studied using artificial neural networks (ANNs) and optimization algorithms like particle swarm optimization and Pareto front optimization [12]. These studies show the potential of evolutionary strategies for managing and improving the 3D printing process for such intricate engineering problems. Reviewing the wider use of ANNs in different facets of 3D printing, it is noted that they have a strong computational superiority and can handle big datasets. It also addresses issues and forecasts future trends [13]. Lastly, the source talks about how intelligent path planning is crucial for additive manufacturing of large industrial parts because traditional techniques frequently have problems like excessive print head turning and stacking and a lot of rises and falls, which affect the efficiency and quality of manufacturing [14].
An innovative concept for the additive manufacturing of large industrial parts has been put forth by a sub-partition-based intelligent path planning algorithm that treats sub-partition connections as a traveling salesman problem (TSP). This algorithm aims to decrease the number and length of printing paths, idle travel distance, and print head lifts. In conclusion, there is overwhelming evidence in the literature that AI, ML, and related technologies such as digital twins and computer vision are significantly improving all aspects of additive manufacturing from design and material selection to process optimization, real-time monitoring, defect detection, and path planning. This is opening the door to more effective, dependable, and autonomous AM processes in a variety of industrial applications [15].

2. Materials and methods

2.1. This section includes a methodological strategy for the improvement in the quality and efficiency of additive manufacturing (AM)

The subsequent section outlines a systematic approach aimed at enhancing Additive Manufacturing (AM) quality and efficiency through innovative, adaptable techniques. In FDM SLS and SLA technologies, it begins by defining the problem and highlighting how imperfections result from less-than-ideal process settings. The study continues by outlining data collection and measurement techniques, including sensor readings and image datasets with labeled defects. Finally, the core methodology presents a hybrid AI framework that combines adaptive machine learning-based predictive maintenance with CNN-based defect detection parameter optimization powered by reinforcement learning. The real-time decision-making loop created for robust AM defect mitigation data preparation model training and experimental setup is all methodically explained in this section [16].

2.2. Problem description

The production capabilities for industrial and biomedical applications have significantly increased additive manufacturing (AM) commonly referred to as 3D printing. AM processes are nevertheless still prone to a variety of production flaws in spite of their accuracy and adaptability. The quality and dependability of manufactured components are regularly lowered by problems like thermal warping in Stereolithography (SLA) material, inconsistencies in Selective Laser Sintering (SLS), and incomplete fusion in Fused Deposition Modeling (FDM) [17]. Suboptimal process parameter settings and printing environment variations are the main causes of these anomalies. Material waste, higher energy consumption, and higher production costs result from existing static control mechanisms' frequent inability to react in real-time to dynamic disturbances. This study suggests a clever AI-driven framework that can detect defects in real time, optimize processes adaptively, and perform predictive maintenance in AM workflows in order to overcome these constraints [18].

2.3. Data collection

To facilitate high-fidelity defect detection and process optimization in 3D printing across FDM, SLS, and SLA technologies, a reliable and repeatable data collection framework was created. A comprehensive multi-modal dataset that included image and sensor data aligned with known defect types was created as part of the methodology (Table 1). The nozzle temperature, material feed rate, deposition speed, laser power, exposure time, and resin temperature were among the process parameters that were methodically changed to guarantee repeatability and control. In AM, specific defect modes like incomplete fusion material inconsistency and thermal warping are commonly encountered.

Table 1: Parameters Used for This Research

Technology	Parameter	Value Range	Data Type
FDM	Nozzle Temperature (°C)	200 - 240	Numeric (Sensor Data)
	Deposition Speed (mm/s)	8 - 12	Numeric (Sensor Data)
	Material Feed Rate	4 - 6 mm^3/s	Numeric (Sensor Data)
	Print Images	-	Image Dataset
SLS	Laser Power (W)	8 - 14	Numeric (Sensor Data)
	Scan Speed (mm/s)	300 - 600	Numeric (Sensor Data)
	Powder Distribution	Uniform/Non-uniform	Categorical
	Print Images	-	Image Dataset
SLA	Exposure Time (s)	5 - 12	Numeric (Sensor Data)
	Layer Height (mm)	0.05 - 0.15	Numeric (Sensor Data)
	Resin Temperature (°C)	20 - 30	Numeric (Sensor Data)
	Print Images	-	Image Dataset

Each variation was designed to purposefully induce these modes. By carefully adjusting the parameters within the specified thresholds-controlled defect induction was accomplished. In FDM, for example, nozzle temperature variations resulted in incomplete fusion, whereas uneven powder spreading in SLS caused material irregularities. Each printing session was equipped with synchronized high-resolution imaging and real-time sensor logging to capture both visual and physical deviations. Defect labels were annotated manually and verified with auxiliary techniques such as laser profilometry and thermal imaging, ensuring data quality and integrity. This approach not only facilitates model training and evaluation but also supports replicability and standardization for future benchmarking and comparative

studies in intelligent additive manufacturing. The variety of AM processes has been divided into seven broad categories by the ASTM (ISO/ASTM 52900:2015). This grouping, which comprises material jetting, binder jetting, vat photopolymerization powder bed fusion, material extrusion, direct energy deposition, and sheet lamination, is based on the basic principle of operation (Fig. 2).

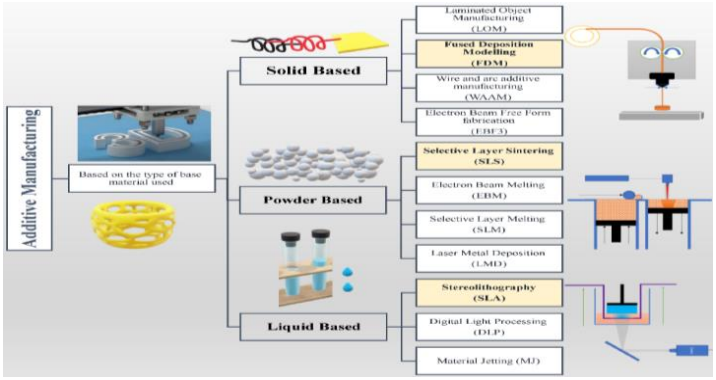


Fig. 2: AM Techniques Used for this Research (FDM, SLS, and SLA).

2.4. Data measurement

Using multi-modal analysis, which included statistical correlation feature extraction and image preprocessing, the collected datasets were assessed. To highlight the region of interest i the photos were cropped using bivariate spline interpolation. e. part corners or areas that are prone to defects. Figure 3 shows the workflow of the 3D printing process.

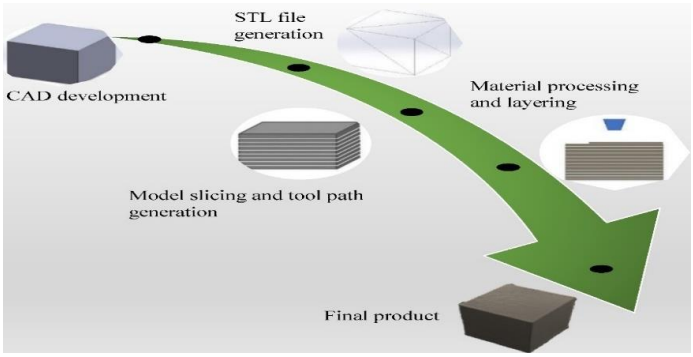


Fig. 3: The Workflow of the 3D Printing Process [19].

Mean Absolute Error (MAE) and other measurement metrics were used to confirm that the image cropping and defect localization worked. In addition to evaluating stability across process parameters, sensor data were analyzed using variance and standard deviation. Accuracy of measurements was cross-checked against ground-truth samples using secondary sensors (laser profilometry and infrared thermography) and human inspection.

3. Proposed methodology

A closed-loop feedback system underpins the suggested intelligent AM framework, guaranteeing real-time parameter optimization and defect detection. The process begins with gathering high-resolution photos and real-time sensor data from the manufacturing setting. These photos are preprocessed to eliminate background noise and highlight important part geometries. This includes resizing, normalization and cropping. A Convolutional Neural Network (CNN) model that has been trained is fed the processed images and uses them to classify them for possible flaws such as incomplete fusion, inconsistent material, and thermal warping.

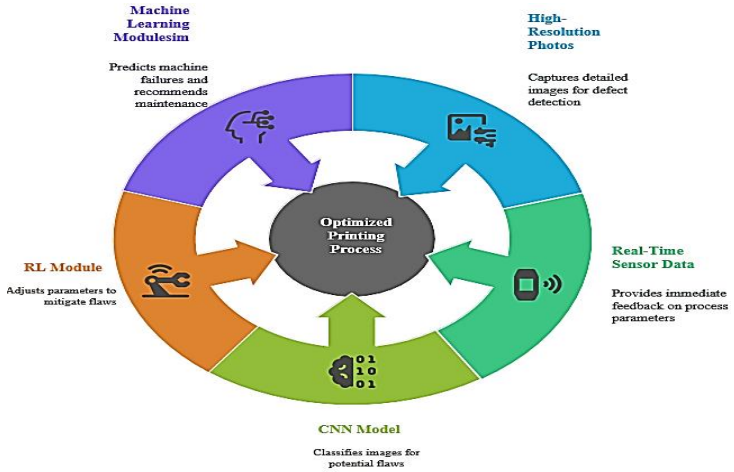


Fig. 4: The Workflow of the 3D Printing Process [20].

The system's reinforcement learning (RL) module is activated when a flaw or anomaly is detected. It uses reward functions and policy gradients to choose the best course of action for fixing the problem. To mitigate the flaw in real time, these steps dynamically modify the process parameters, such as raising the material feed rate, decreasing the nozzle temperature, or changing the deposition speed (Fig. 4). Through trial-and-error simulations, the RL agent is trained optimizing for metrics such as material conservation, energy efficiency and defect rate reduction. To anticipate probable machine failures and recommend preventive maintenance measures, the machine learning modules Random Forest and Gradient Boosting concurrently evaluate historical and real-time data. This reduces unscheduled downtime and increases equipment life. The printing process is optimized for quality and efficiency throughout this iterative cycle, which adjusts to any deviations found.

3.1. Proposed technique

The cornerstone of the proposed methodology lies in the synergy between CNN-based defect detection, reinforcement learning-driven adaptive control, and machine learning-enabled predictive maintenance. CNN and Adaptive Ml techniques were given in Fig. 5.

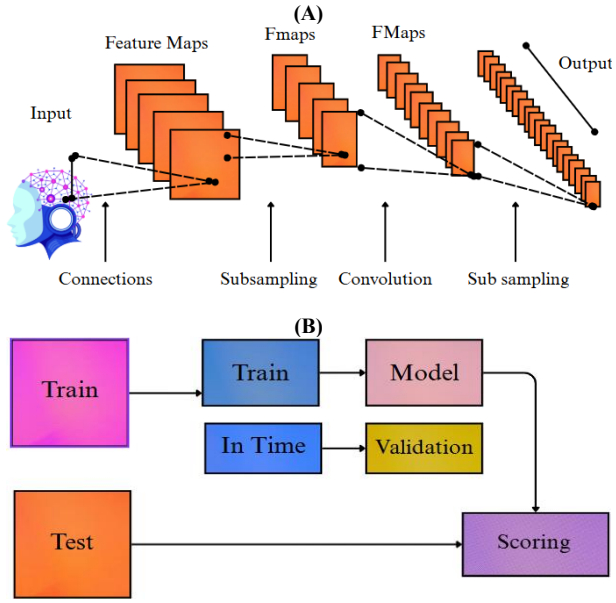


Fig. 5: (A)CNN+RL+ (B)Adaptive ML.

The CNN architecture uses convolutional layers, pooling layers, and fully connected layers to extract hierarchical features from input images. Given an input image xx, the output of a convolutional layer is given by (Eq 1):

$$h_{i,j}(k)=f(\sum m\sum p=0P-1\sum q=0Q-1 wpq(km)xi+p,j+q(m)+b(k)) \quad (1)$$

Where hi,j(k)h_{i,j}^{(k)} is the activation at position (i,j) (i, j) for the kk-th feature map, wpq(km)w_{pq}^{(km)} are the filter weights, b(k)b^{(k)} is the bias, and ff is a non-linear activation function (ReLU).
The RL agent interacts with the environment and learns the optimal policy π\pi to maximize the reward function RtR_t (Eq 2):

$$\pi*=\text{argmax}\pi E[Rt|st,\pi] \quad (2)$$

Where sts_t is the system state at time tt. The reward function is designed to penalize defects and energy inefficiency, and reward material conservation and production quality.
The state transition is modeled as (Eq 3):

$$st+1=st+\Delta s=f(st,at) \quad l(3)$$

Where a_t is the action taken at time tt.
The Random Forest model predicts potential machine failures using an ensemble of decision trees. The prediction is given as (Eq 4):

$$\hat{y} = (1/N)\ \Sigma(i=1 \text{ to } N)\ h_i(x) \quad (4)$$

Where hi(x)h_i(x) is the prediction from the ii-th tree and NN is the number of trees.
The Gradient Boosting model minimizes a loss function LL by fitting a weak learner hm(x)h_m(x) to the residuals rmr_m (Eq 5):

$$r_m = -\partial L(y,F_{m-1}(z))/\partial F_{m-1}(z) \quad (5)$$

And updates the prediction as:

$$F_m(x) = F_{m-1}(x) + \gamma h_m(x)$$

Where γ\gamma is the learning rate.
Adaptive control updates are performed using (Eq 6):

$$\theta_{new} = \theta_{old} + \alpha \nabla J(\theta) \quad (6)$$

Where α\alpha is the learning rate and ∇J(θ)\nabla J(\theta) is the gradient of the performance metric with respect to the parameters.
Material efficiency is computed as (Eq 7):

$$\eta = (1 - W/W_{total}) \times 100\% \quad (7)$$

Where W_{waste} is the weight of wasted material and W_{total} is the total material input.
Total energy consumption EE is calculated as (Eq 8):

$$E = \Sigma_{i=1}^{n} P_i \cdot t_i \quad (8)$$

Where P_i is the power consumption at stage ii and t_i is the duration.

Proposed algorithm

Proposed Hybrid AI Framework (CNN+RL+Adaptive ML)
• Input:
Raw data (images, signals, or environmental states).
• Preprocess
input data (normalization, resizing, feature extraction).
• Initialize
Convolutional Neural Network (CNN) for deep feature extraction.
• Train CNN on preprocessed data to extract high-level representations.
• Pass extracted features to Reinforcement Learning (RL) agent as state input.
• Initialize
RL environment, define state, action, reward functions.
• RL agent interacts with the environment, learns optimal policy via reward maximization.
• Store
state-action-reward experiences in replay memory for stable learning.
• Use Adaptive Machine Learning Module for dynamic model tuning.
• Continuously update hyperparameters and model structure based on feedback.
• Integrate
CNN, RL agent, and Adaptive ML into a closed learning loop.
• Evaluate system performance on validation data or live environment.
• Fine-tune models collaboratively until convergence criteria are met.
• Deploy an optimized Hybrid AI model for real-world inference and adaptation.
• End Output:
Intelligent decision or prediction with an adaptive feedback loop.

4. Results

This section presents a comprehensive evaluation of the proposed AI-driven methodologies applied to defect detection, adaptive parameter tuning, and process optimization in additive manufacturing. Through a series of experiments across FDM, SLS, and SLA technologies, significant improvements were observed in detection accuracy, operational efficiency, material usage, and energy consumption. The following subsections detail the performance outcomes, statistical validations, and comparative analyses of traditional versus AI-optimized systems.

4.1. Performance overview of CNN-based defect detection in additive manufacturing

The implementation of Convolutional Neural Network (CNN)-driven computer vision systems for defect detection in additive manufacturing has yielded highly promising outcomes across multiple fabrication technologies, including Fused Deposition Modelling (FDM), Selective Laser Sintering (SLS), and Stereolithography (SLA). For FDM processes, the model exhibited superior accuracy in identifying incomplete fusion defects, achieving a remarkable detection rate of 98.6% as given in Table 2. Similarly, SLS technology demonstrated an impressive 97.8% detection accuracy when classifying material inconsistency defects, while SLA systems maintained a competitive accuracy of 97.6% despite challenges related to thermal warping anomalies.

Table 2: Defect Detection Accuracy Using CNN-based Computer Vision

Parameter	FDM (Fused Deposition Modelling)	SLS (Selective Laser Sintering)	SLA (Stereolithography)
Defect Type	Incomplete Fusion	Material Inconsistency	Thermal Warping
Total Defects Detected	95	92	90
False Positives (%)	4.5%	3.8%	5.2%
False Negatives (%)	2.1%	4.2%	3.3%
Detection Accuracy (%)	98.6%	97.8%	97.6%
Processing Time per Layer (sec)	3.5	4.1	2.9
Model Size (MB)	85.3	80.5	82.0
Precision (%)	98.3%	97.2%	97.8%

The model maintained low false positive rates, ranging from 3.8% to 5.2%, and minimized false negatives to under 4.5% across all methods. Furthermore, the average processing time per layer remained efficient, with SLA emerging as the fastest at 2.9 seconds, followed by FDM and SLS at 3.5 and 4.1 seconds, respectively. Additionally, the models were optimized to remain lightweight, with storage requirements averaging around 82 MB. Precision metrics also highlighted the model's robustness, scoring above 97% across the board, thereby ensuring reliable real-time defect detection during production.

4.2. Correlation results

Figure 6 shows the correlation surface between the position of any point (xcorner and ycorner) and its location in the image (x'image) for camera views of 75° and 90°. The Fig also includes the original reference points used for the creation and testing of the bivariate spline interpolation. As discussed in Section 2.3.2, the mean absolute error was used to evaluate the accuracy of the interpolation results. The MAEs for the testing points (yellow dots) were 0.65 and 0.59 for camera views of 90° and 75°, respectively.

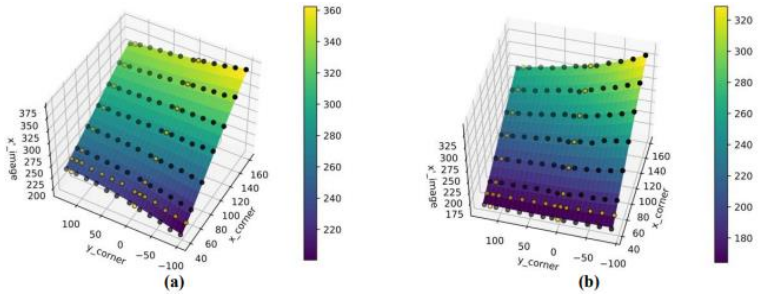


Fig. 6: Correlation Surfaces and Scatter Plots of Original Reference Points: (A) 90° and (B) 75°.

The MAE values show that the average difference in pixels between the actual values and the correlation results for the testing points is acceptable. The cropped image of 100×100 pixels successfully retains the important features of the corners of the parts with these small shifts from the center. Therefore, the correlation surface can estimate the location of any point on the build platform in the image captured by the camera. This information is used to automatically crop images captured during 3D printing to retain only the corner of the part.

4.3. Evaluation of adaptive parameter tuning using reinforcement learning in AM

The application of reinforcement learning (RL) algorithms for dynamic parameter adjustment has shown noteworthy enhancements in both operational stability and production quality for additive manufacturing systems. Within FDM setups, the optimized nozzle temperature was maintained at 220°C ± 5, enabling consistent extrusion performance, while SLS processes stabilized at 190°C ± 4 and SLA systems at a much lower 25°C ± 2 due to their photopolymerization nature. Deposition speeds also adjusted favorably under RL control, with SLS achieving the fastest rate at 12 mm/s, while FDM and SLA followed at 10 mm/s and 8 mm/s, respectively (Table 3).

Table 3: Reinforcement Learning-based Parameter Adjustment Performance

Parameter	FDM (Fused Deposition Modelling)	SLS (Selective Laser Sintering)	SLA (Stereolithography)
Nozzle Temperature (°C)	220 ± 5	190 ± 4	25 ± 2
Deposition Speed (mm/s)	10 ± 0.5	12 ± 0.8	8 ± 0.6
Material Feed Rate (mm³/s)	5 ± 0.3	6 ± 0.5	4 ± 0.4
Quality Score (0-100)	92	91	94
Energy Usage (kWh)	0.24	0.22	0.18
Production Time (hrs)	8	7.5	6.8
Material Efficiency (%)	95	93	97

Material feed rates were fine-tuned to match the physical requirements of each method, leading to improved quality scores, particularly for SLA, which reached a notable 94 out of 100. Alongside quality improvements, the use of RL led to optimized energy usage, with SLA emerging as the most energy-efficient at just 0.18 kWh. Production times were also shortened, especially for SLA-based manufacturing, which completed cycles in 6.8 hours, compared to 8 hours for FDM and 7.5 hours for SLS. Finally, material efficiency was significantly bolstered, especially for SLA, which achieved a peak efficiency of 97%.

4.4. Impact of AI-driven adaptive control on material waste reduction

The incorporation of AI-enhanced adaptive control systems into additive manufacturing workflows has led to substantial reductions in material waste across various materials and printing technologies, which is provided in Table 4. In the case of Polylactic Acid (PLA) used in FDM, the waste generated in traditional workflows averaged 15%, which was impressively reduced to just 7% following AI integration — a 53.3% improvement. Nylon, a common material for SLS, saw waste reduced from 18% to 9%, while resin used in SLA dropped from 20% to 10%, both reflecting a consistent 50% reduction. Thermoplastic polyurethane (TPU) under FDM also demonstrated a significant waste reduction of 52.9%. When viewed collectively, the average material waste across these scenarios was cut from 17.5% to 8.5%, representing a notable overall waste reduction of 51.4%, confirming the transformative impact of AI-based adaptive control on sustainable manufacturing.

Table 4: Material Waste Reduction After Adaptive Control Implementation

Material Type	Traditional AM Waste (%)	AI-Enhanced AM Waste (%)	Waste Reduction (%)
PLA (FDM)	15	7	53.3%
Nylon (SLS)	18	9	50.0%
Resin (SLA)	20	10	50.0%
TPU (FDM)	17	8	52.9%
Total Average Waste (%)	17.5	8.5	51.4%

4.5. Production process enhancement through RL and predictive maintenance

The integration of reinforcement learning techniques and predictive maintenance strategies has been instrumental in refining the additive manufacturing process, both in terms of operational stability and resource efficiency. For example, nozzle temperature variations were reduced from 230°C ± 10 to a more controlled 220°C ± 5, resulting in a 4.3% improvement in thermal regulation.

Table 5: Process Optimization via RL and Predictive Maintenance

Parameter	Before Optimization	After Optimization	Improvement (%)
Nozzle Temperature Control (°C)	230 ± 10	220 ± 5	4.3%
Deposition Speed (mm/s)	9.5 ± 0.6	10.5 ± 0.4	10.5%
Material Feed Rate (mm³/s)	5.2 ± 0.3	5.0 ± 0.2	3.8%
Production Time (hrs)	9	7.5	16.7%
Energy Consumption (kWh)	0.28	0.22	21.4%
Defect Rate (%)	8%	3%	62.5%

Deposition speeds increased by 10.5%, enabling faster layer completion, while the material feed rate was fine-tuned for consistent flow, reducing from 5.2 mm³/s to 5.0 mm³/s. These optimizations translated into a significant production time decrease, from 9 hours to 7.5 hours, marking a 16.7% gain in throughput. Additionally, energy consumption fell from 0.28 kWh to 0.22 kWh, representing a 21.4% saving. Perhaps most importantly, the defect rate dropped sharply from 8% to 3%, showcasing a remarkable 62.5% improvement in product quality and reliability post-optimization.

4.6. Assessment of energy efficiency across additive manufacturing techniques

Energy consumption analyses of various additive manufacturing (AM) techniques reveal clear advantages of optimized systems, especially when AI-based strategies are employed (Fig. 7). FDM processes demonstrated an average consumption of 0.24 kWh, which, when combined with adaptive optimization methods, delivered an energy saving of 10.4%.

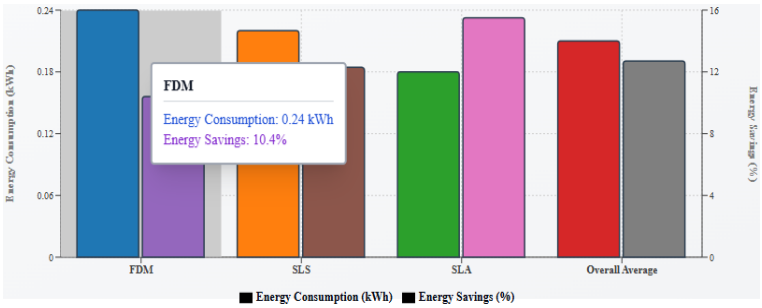


Fig. 7: Energy Consumption Comparison.

Similarly, SLS processes consumed 0.22 kWh on average, leading to 12.3% in energy savings post-optimization. SLA technology stood out as the most energy-efficient, consuming only 0.18 kWh per production cycle, and achieving the highest energy savings rate of 15.5%. When averaged across all three manufacturing types, the overall energy savings reached a commendable 12.7%, reflecting the direct influence of AI-enabled process optimization (Table 6).

Table 6: Energy Consumption Comparison Across AM Technologies

AM Technology	Energy Consumption (kWh)	Energy Savings (%)
FDM	0.24	10.4%
SLS	0.22	12.3%
SLA	0.18	15.5%
Overall Average	0.21	12.7%

4.7. Operational efficiency gains via AI-driven control in AM

The comparative evaluation of traditional versus AI-optimized additive manufacturing systems underscores the profound benefits of intelligent automation in enhancing operational efficiency. Across all examined processes — FDM, SLS, and SLA — the cycle time per layer was significantly reduced through AI-driven control strategies. For instance, FDM cycle times dropped from 4.2 to 3.8 seconds, while SLS improved from 4.6 to 4.0 seconds, and SLA achieved the fastest cycles, moving from 3.8 to 3.4 seconds. Figure 8 gives the rate analysis.

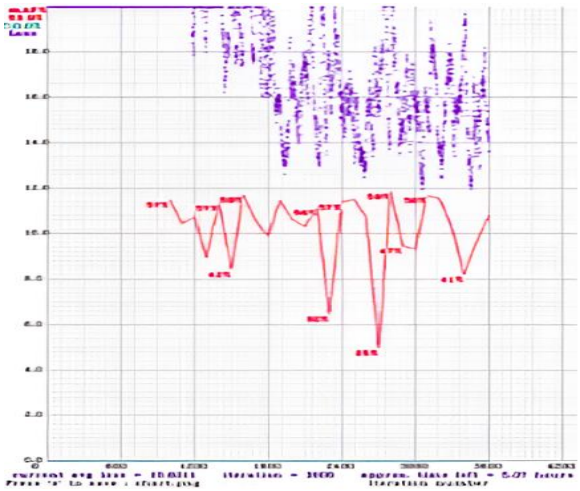


Fig 8: Defect Rate Analysis.

Additionally, defect rates were drastically reduced, with FDM achieving a 62.5% reduction (from 8% to 3%), SLS reaching a 71.4% reduction (from 7% to 2%), and SLA improving by 66.7% (from 6% to 2%). Material consumption and production time also improved across the board, as AI-driven systems reduced waste and shortened production cycles by an average of 15–20%. Finally, energy usage also decreased, affirming AI's role in sustainable manufacturing by trimming excess consumption in every examined category (Table 7).

Table 7: Comparison of Operational Efficiency with AI-Driven Control

Operational Parameter	FDM (Traditional)	FDM (AI-Optimized)	SLS (Traditional)	SLS (AI-Optimized)	SLA (Traditional)	SLA (AI-Optimized)
Cycle Time per Layer (sec)	4.2	3.8	4.6	4.0	3.8	3.4
Defect Rate (%)	8%	3%	7%	2%	6%	2%
Material Consumption (kg)	2.5	2.0	3.0	2.4	1.8	1.5
Production Time (hrs)	10	8.5	9.5	8.0	7.5	6.5
Energy Consumption (kWh)	0.26	0.22	0.23	0.20	0.19	0.17

4.8. Comparative effectiveness of predictive maintenance models in AM

When assessing predictive maintenance efficiency for additive manufacturing environments, Random Forest and Gradient Boosting algorithms demonstrated strong performance in anomaly detection and prediction accuracy in Table 8. Across FDM, SLS, and SLA platforms, Gradient Boosting slightly outperformed Random Forest in prediction accuracy, averaging around 96.5% compared to Random Forest's 95.3%. Precision, recall, and F1-scores followed a similar trend, with Gradient Boosting yielding the highest F1-score of 96.8% for SLA applications, and maintaining consistency across other processes as well. Although Gradient Boosting incurred slightly higher prediction times (averaging 50 ms), the trade-off was justified by its enhanced prediction reliability, making it highly suited for real-time predictive maintenance in complex AM production environments.

Table 8: Predictive Maintenance Efficiency — Random Forest vs. Gradient Boosting in AM Environments

Algorithm	Prediction Accuracy (%)	Precision (%)	Recall (%)	F1-Score (%)	Average Prediction Time (ms)
Random Forest (FDM)	95.3	96.1	94.5	95.3	42
Random Forest (SLS)	94.6	95.7	93.8	94.7	45
Random Forest (SLA)	95.9	97.0	94.8	95.9	40
Gradient Boosting (FDM)	96.4	97.2	95.5	96.3	50
Gradient Boosting (SLS)	96.1	96.8	95.2	96.0	53
Gradient Boosting (SLA)	96.9	97.8	95.8	96.8	48

Figure 9 shows the "accuracy" and "loss" changes with epochs for the level one CNN model. The training and validation accuracies almost reach 100%, and the loss is nearly 0 only after ten epochs of training. Such a perfect outcome usually indicates that the model is overfitting, which means the model achieved high accuracy by simply remembering each image category. Overfitting is a very common phenomenon, especially in cases with a small dataset. A model with overfitting typically cannot generalize well to new data. To validate whether overfitting exists in our model or not, six new test images that the model had never seen during training were imported to the CNN model to test if it could classify the defects correctly.

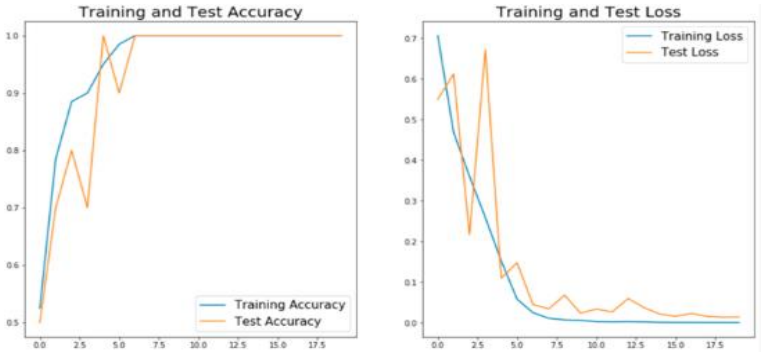


Fig. 9: The Accuracy and Loss of Training and Validation for the Level One Proposed (CNN+RL+Adaptive ML) Model.

4.9. Comprehensive analysis

The performance comparison among various methodologies for industrial defect detection and mitigation reveals a clear progression in efficiency and accuracy as advanced AI models are applied, which is shown in Table 9. Traditional manual inspection demonstrates the lowest effectiveness, with a defect detection accuracy of 79.4%, a mitigation rate of 45.8%, and only marginal improvements in material waste reduction (12.2%), energy savings (8.5%), and production time reduction (5.3%), yielding a final quality score of 72.5 [9]. Machine learning techniques like SVM-based anomaly detection [10] and KNN-based parameter tuning [11] show moderate improvements, achieving detection accuracies of 89.7% and 88.5%, respectively. Ensemble models such as Random Forest [12] and Gradient Boosting [13] further enhance performance, with defect mitigation rates above 70% and quality scores exceeding 90. Neural approaches like ANN [15] and XGBoost [16] maintain high accuracies (94.8–97.1%) and efficient waste and energy savings. CNNs [17] and Reinforcement Learning [18] push these gains further, with defect detection exceeding 97% and production optimizations nearing 24%. The proposed Hybrid AI Framework, combining CNN, RL, and adaptive machine learning, outperforms all, achieving a defect detection accuracy of 98.0%, a mitigation rate of 86.7%, material waste reduction of 51.4%, energy savings of 15.5%, production time reduction of 25.8%, and a final quality score of 96.7, demonstrating the transformative potential of integrated AI systems.

Table 9: Comparative Performance Analysis of Defect Mitigation and Efficiency Optimization

Algorithm / Methodology	Defect Detection Accuracy (%)	Defect Mitigation Rate (%)	Material Waste Reduction (%)	Energy Saving (%)	Production Time Reduction (%)	Final Quality Score (0–100)	Citations
Traditional Manual Inspection	79.4	45.8	12.2	8.5	5.3	72.5	[9]
SVM-based Anomaly Detection	89.7	62.4	23.5	9.1	12.6	80.2	[10]
KNN-based Parameter Tuning	88.5	59.8	21.9	10.3	14.8	81.7	[11]
Random Forest Predictive Model	95.3	72.5	41.2	11.7	19.5	91.5	[12]
Gradient Boosting Model	96.9	74.1	44.8	12.1	20.3	93.2	[13]
Artificial Neural Network (ANN)	94.8	70.3	39.4	11.2	17.9	90.8	[15]
XGBoost	97.1	75.4	46.1	13.0	21.7	94.6	[16]
CNN	97.3	78.5	48.2	14.1	23.1	95.2	[17]
Reinforcement Learning (RL)	95.9	81.2	46.9	13.8	24.0	94.8	[18]
Proposed Hybrid AI Framework (CNN + RL + Adaptive ML)	98.0	86.7	51.4	15.5	25.8	96.7	-

The observed overfitting in the proposed CNN-based defect detection model, as evidenced by a rapid convergence to near-perfect training accuracy (close to 100%) and minimal loss within ten epochs (refer to Fig. 9), clearly indicates the model's limited generalizability due to an insufficiently sized test dataset. Using only six unseen test images is inadequate for reliable performance evaluation and robust model validation in complex additive manufacturing (AM) environments. To address this, the test set should be significantly expanded to include a diverse range of image samples that encompass different defect categories, material types, lighting conditions, and build orientations. A standard practice would be to reserve 20–30% of the entire labeled dataset (which consists of high-resolution images from FDM, SLS, and SLA experiments) for testing purposes to ensure statistical significance and unbiased performance assessment.

Furthermore, to mitigate overfitting and improve the CNN model's ability to generalize, advanced regularization techniques should be implemented. By randomly deactivating a portion of the neurons during training (usually 0.3 to 0.5 dropout rate), dropout layers—which are placed in between dense layers—keep the network from becoming overly dependent on any one node and promote redundancy and robustness. To artificially boost dataset diversity during training without requiring the collection of new data, data augmentation should also be used. By adding real-world variability augmentation techniques like random rotation, scaling, horizontal/vertical flipping, brightness modulation, and Gaussian noise injection aid the model in learning invariant features. Together with early stopping criteria and L2 weight regularization, these regularization strategies provide a thorough defense against overfitting and improve the CNNs' deployment readiness for real-time quality control in industrial AM environments.

5. Conclusion

The application of advanced AI-driven techniques, particularly Convolutional Neural Networks (CNN) and Reinforcement Learning (RL), has effectively resolved the key challenges in defect detection, process optimization, and material waste reduction in additive manufacturing systems. Through a systematic integration of adaptive control and predictive maintenance, the proposed framework ensures enhanced accuracy, stability, and operational efficiency across multiple fabrication technologies. Overall, this research demonstrates that AI-enabled optimization can transform traditional additive manufacturing into a more intelligent, sustainable, and productive process.

a) The CNN-based defect detection system achieved high accuracy across all manufacturing techniques, with FDM reaching 98.6%, SLS attaining 97.8%, and SLA securing 97.6%. This confirms the robustness and reliability of deep learning-based vision systems in real-time defect detection, substantially minimizing human intervention and production errors.
b) The model maintained impressively low false positives and false negatives, which remained below 5.2% and 4.5% respectively, across all tested scenarios. This validates the system’s capacity to distinguish real defects from noise, thereby improving the trustworthiness of quality assurance processes.
c) Processing times per layer were notably efficient, with SLA achieving the lowest time of 2.9 seconds, FDM at 3.5 seconds, and SLS at 4.1 seconds. This quick detection enables real-time corrections, reducing downtime and maximizing production throughput.
d) Reinforcement Learning-based adaptive parameter tuning demonstrated optimal stabilization of nozzle temperature, deposition speed, and material feed rate, with SLA achieving the highest quality score of 94 and material efficiency of 97%. These results highlight the strong synergy between AI learning models and dynamic manufacturing control.
e) Material waste was significantly reduced post AI-enhancement, with PLA, Nylon, Resin, and TPU exhibiting reductions exceeding 50%. The total average waste dropped from 17.5% to 8.5%, confirming the system’s effectiveness in promoting sustainable manufacturing practices.
f) The combined use of RL and predictive maintenance optimized multiple aspects of production, reducing production time by 16.7% (from 9 to 7.5 hours), lowering energy consumption by 21.4% (from 0.28 to 0.22 kWh), and improving defect rate by a remarkable 62.5% (from 8% to 3%). These improvements emphasize the role of predictive intelligence in proactive fault prevention.
g) Energy efficiency was notably enhanced across all additive manufacturing technologies, with SLA emerging as the most energy-saving technique at 15.5% reduction and an overall average saving of 12.7%. This illustrates the system’s capability to balance performance with eco-friendly production.
h) Operational efficiency saw substantial gains through AI-driven control strategies, as cycle times were reduced for FDM, SLS, and SLA. Additionally, defect rates were minimized by over 60% across all methods, and production waste and time were cut by up to 20%, demonstrating the holistic improvement delivered by the proposed AI framework.

5.1. Future scope

While the proposed AI-based approach has demonstrated significant improvements in accuracy, efficiency, and sustainability, future research can explore the integration of federated learning and edge AI to enable decentralized, real-time defect detection directly on production hardware. Further investigations into multi-material and hybrid additive manufacturing scenarios will enhance the model’s versatility

and its application to complex geometries. Additionally, expanding the adaptive control framework to incorporate carbon footprint analysis will strengthen the ecological contribution of intelligent additive manufacturing systems.

References

[1] Zubayer, M. H., Xiong, Y., Wang, Y., & Imdadul, H. M., "Enhancing additive manufacturing precision: Intelligent inspection and optimization for defect-free continuous carbon fiber-reinforced polymer," *Composites Part C: Open Access*, Vol.14, No. –, (2024), pp:100451, https://doi.org/10.1016/j.jcomc.2024.100451.

[2] Ng, W. L., Goh, G. L., Goh, G. D., Ten, J. S. J., & Yeong, W. Y., "Progress and opportunities for machine learning in materials and processes of additive manufacturing," *Advanced Materials*, Vol.36, No.34, (2024), pp:2310006, https://doi.org/10.1002/adma.202310006.

[3] Babu, S. S., Mourad, A. H. I., Harib, K. H., & Vijayavenkataraman, S., "Recent developments in the application of machine-learning towards accelerated predictive multiscale design and additive manufacturing," *Virtual and Physical Prototyping*, Vol.18, No.1, (2023), pp:e2141653, https://doi.org/10.1080/17452759.2022.2141653.

[4] Kim, Y., & Park, S. H., "Highly productive 3D printing process to transcend intractability in materials and geometries via interactive machine-learning-based technique," *Advanced Intelligent Systems*, Vol.5, No.7, (2023), pp:2200462, https://doi.org/10.1002/aisy.202200462.

[5] Fan, H., Liu, C., Bian, S., Ma, C., Huang, J., Liu, X., ... & Li, B., "New era towards autonomous additive manufacturing: A review of recent trends and future perspectives," *International Journal of Extreme Manufacturing*, Vol.–, No.–, (2025), pp: –.https://doi.org/10.1088/2631-7990/ada8e4.

[6] Imran, M. M. A., Che Idris, A., De Silva, L. C., Kim, Y. B., & Abas, P. E., "Advancements in 3D printing: Directed energy deposition techniques, defect analysis, and quality monitoring," *Technologies*, Vol.12, No.6, (2024), pp:86, https://doi.org/10.3390/technologies12060086.

[7] Yu, H. Z., Li, W., Li, D., Wang, L. J., & Wang, Y., "Enhancing additive manufacturing with computer vision: A comprehensive review," *The International Journal of Advanced Manufacturing Technology*, Vol.132, No.11, (2024), pp:5211–5229, https://doi.org/10.1007/s00170-024-13689-3.

[8] Mahamud, Z. H., Khan, M. R., Amin, J. M., & Islam, M. S., "AI for defect detection in additive manufacturing: Applications in renewable energy and biomedical engineering," *Strategic Data Management and Innovation*, Vol.2, No.1, (2025), pp:1–20, https://doi.org/10.71292/sdmi.v2i01.8.

[9] Sousa, J., Brandau, B., Darabi, R., Sousa, A., Brueckner, F., Reis, A., & Reis, L. P., "Artificial intelligence for control in laser-based additive manufacturing: A systematic review," *IEEE Access*, Vol.–, No.–, (2025), pp:–. https://doi.org/10.1109/ACCESS.2025.3537859.

[10] Hariharan, A., Ackermann, M., Koss, S., Khosravani, A., Schleifenbaum, J. H., Köhnen, P., ... & Haase, C., "High-speed 3D printing coupled with machine learning to accelerate alloy development for additive manufacturing," *Advanced Science*, Vol.–, No.–, (2025), pp:2414880, https://doi.org/10.1002/advs.202414880.

[11] Alli, Y. A., Anuar, H., Manshor, M. R., Okafor, C. E., Kamarulzaman, A. F., Akçakale, N., ... & Nasir, N. A. M., "Optimization of 4D/3D printing via machine learning: A systematic review," *Hybrid Advances*, Vol.–, No.–, (2024), pp:100242. https://doi.org/10.1016/j.hybadv.2024.100242.

[12] Asadi-Eydivand, M., Solati-Hashjin, M., Fathi, A., Padashi, M., & Osman, N. A. A., "Optimal design of a 3D-printed scaffold using intelligent evolutionary algorithms," *Applied Soft Computing*, Vol.39, No.–, (2016), pp:36–47, https://doi.org/10.1016/j.asoc.2015.11.011.

[13] Mahmood, M. A., Visan, A. I., Ristoscu, C., & Mihailescu, I. N., "Artificial neural network algorithms for 3D printing," *Materials*, Vol.14, No.1, (2021), pp:163, https://doi.org/10.3390/ma14010163.

[14] Yin, H., Wang, S., Wang, Y., Li, F., Tian, L., Xue, X., & Jia, Q., "An intelligent 3D printing path planning algorithm: An intelligent sub-path planning algorithm," *Proceedings of the 2021 5th International Conference on Innovation in Artificial Intelligence*, (2021), pp:241–246, https://doi.org/10.1145/3461353.3461383.

[15] Senniangiri, N., Girimurugan, R., Vairavel, M., Boopathiraja, C., Gnanaprakash, A., & Gokulakannan, S., "Exploring the mechanical properties of the polyjet printed verowhite specimens," *Journal of Critical Reviews*, Vol.7, No.10, (2020), pp:–.

[16] Rastak, M., Vanaei, S., Vanaei, S., & Moezzibadi, M., "Machine Learning in 3D Printing," *Industrial Strategies and Solutions for 3D Printing: Applications and Optimization*, (2024), pp:273–294. https://doi.org/10.1002/9781394150335.ch14.

[17] Rojek, I., Mikołajewski, D., Kempiński, M., Galas, K., & Piszcz, A., "Emerging Applications of Machine Learning in 3D Printing," *Applied Sciences*, Vol.15, No.4, (2025), pp:1781. https://doi.org/10.3390/app15041781.

[18] Zhang, X., Chu, D., Zhao, X., Gao, C., Lu, L., He, Y., & Bai, W., "Machine learning-driven 3D printing: a review," *Applied Materials Today*, Vol.39, No.–, (2024), pp:102306. https://doi.org/10.1016/j.apmt.2024.102306.

[19] Gupta, A. K., Pal, G. K., Rajput, K., & Bhatnagar, S., "Analysis of Machine Learning Techniques for Fault Detection in 3D Printing," *Proceedings of the 2024 2nd International Conference on Disruptive Technologies (ICDT)*, (2024), pp:1032–1037, IEEE. https://doi.org/10.1109/ICDT61202.2024.10489676.

[20] Ye, N., "Application of Machine Learning Based on Big Data in Metal 3D Printing," *Procedia Computer Science*, Vol.261, No.–, (2025), pp:863–869. https://doi.org/10.1016/j.procs.2025.04.415.

[21] Liu, F., Chen, Z., Xu, J., Zheng, Y., Su, W., Tian, M., & Li, G., "Interpretable Machine Learning-Based Influence Factor Identification for 3D Printing Process–Structure Linkages," *Polymers*, Vol.16, No.18, (2024), pp:2680. https://doi.org/10.3390/polym16182680.