International Journal of Engineering &Technology, 7 (3.12) (2018) 968 -973

International Journal of Engineering & Technology

Website: www.sciencepubco.com/index.php/IJET

Research paper



Performance Evaluation of Co-Design of Discrete Event Networked Controlled DC Motor System

Ankur Jain[1*], B. K. Roy[2]

[1,2]National Institute of Technology, Silchar, India
**Corresponding Author Email: [1]ankurjainjob@gmail.com*

Abstract

In this paper, we have designed a control technique for a networked DC motor in the presence of networked delay, packet loss, and jitter. We have used the predicted states for the controller design to achieve the transient and steady-state objectives. A networked compensator is designed to overcome the network constraints. The network link is modelled using the queue server mechanism which can assimilate a lot of features of the network. The proposed technique can also be applied to various other applications. The analysis of the networked control system is done in frequency and time domains. The simulation results are presented to test the performance of the proposed control technique.

Keywords: *Controller design; Internet of Things (IoT); Networked control system (NCS); DC motor speed control.*

1. Introduction

The networked control system (NCS) is an interdisciplinary subject which consists of control engineering, communication engineering [**Error! Reference source not found.**],[**Error! Reference source not found.**]. It can be seen as a distributed system [**Error! Reference source not found.**]which composed of computation in cyber-space, sensing in physical space and communication functionality to link cyber-space with physical space [**Error! Reference source not found.**, **Error! Reference source not found.**]. Hence, it can also be called as one type of cyber-physical system (CPS) [**Error! Reference source not found.**]. The very fast growth in VLSI and ubiquitous computing [**Error! Reference source not found.**], cloud computing [**Error! Reference source not found.**], big data analysis[**Error! Reference source not found.**], has been shifting the control engineering into a new paradigm and leads to significant number of research publications [**Error! Reference source not found.**].

In NCS, control loop(feedback, forward, or both) is closed by a network[**Error! Reference source not found.**, **Error! Reference source not found.**].The introduction of a network gives some advantages like ease of maintenance, low power consumption in signal transmission, better resource sharing, better data handling, low-cost control, less wiring, etc. At the same time, a network introduces delay (D), dropout (DP), packet disorder (DO), limited bandwidth (LBW), less computational power at plant side and high computational power on cyber side, etc. Various network constraints are reported in the literature and are listed Table 1.

Table 1: The literature survey on network constraints

Time delay	[**Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**]
Packet dropout	[**Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**]
Packet disorder	[**Error! Reference source not found.**, **Error! Reference source not found.**]
Jitter	[**Error! Reference source not found.**, **Error! Reference source not found.**]
Limited bandwidth	[**Error! Reference source not found.**, **Error! Reference source not found.**]
Scheduling	[**Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**]
Security	[**Error! Reference source not found.**]

Among all the mentioned constraints, delay, dropout and jitter have the major influences on the performance. These constraints may even cause instability. These constraints are modelled in various ways in the literature such as Markov chain [**Error! Reference source not found.**], transportation delay [**Error! Reference source not found.**], virtual switch [**Error!**

Copyright © 2018 Authors. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Reference source not found.], a periodic sampling, etc. In this paper, we have formulated a discrete event system in which delay is modelled by service time of the server, and packet loss is modelled by the switch.

Nowadays, networked control system is used in variety of fields like surveillance system, remote surgery, robotics, automated manufacturing, ball maglev system, DC motor, automated highway, cooperative adaptive cruise control, inverted pendulum, telemedicine and many more. A survey on the applications of NCS is shown in Table 2

Table 2: The literature survey on the applications of NCS

DC motor system	[**Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**]
Ball-maglev system	[**Error! Reference source not found.**]
Robotics	[**Error! Reference source not found.**]
Surveillance system	[**Error! Reference source not found.**]
Cooperative adaptive Cruise Control	[**Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**]
Automated Highway	[**Error! Reference source not found.**]
Automated Manufacturing	[**Error! Reference source not found.**]
TeleMedicine	[**Error! Reference source not found.**]

In this paper, we have designed a NCS for a DC motor. The networked control has been studied using various control approaches such as robust control, adaptive control, optimal control, stochastic control, predictive control. A survey on the use of various control approaches is listed in Table 3.

Here, we have modelled our system as a discrete event system and for the purpose of analysis, we use time delay framework. Here, one of the objectives of the paper is to reduce the usage of network without compromising the performance of the system. This objective demands transmitting of information as and when require. Thus, an event-based design is an obvious solution.

Table 3: The literature survey on approach for controller design

Robust control	[**Error! Reference source not found.**, **Error! Reference source not found.**]
Predictive	[**Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**, **Error! Reference source not found.**]
Optimal	[**Error! Reference source not found.**]
Adaptive	[**Error! Reference source not found.**]
Discrete event system	[**Error! Reference source not found.**]
Time delay system	[**Error! Reference source not found.**]

We introduce the condition for sampling (when to take a sample) for energy efficiency, the event threshold condition (when to transmit a sample) for bandwidth reduction and predictive control model (future control input) for networked delay compensation. We propose a networked predictive technique with an LQR control which is able to compensate the delay introduced by the network. For a DC motor, various control problems such as speed regulation, speed tracking, position tracking have been studied in the literature. The main idea behind an event triggered control is to sample a signal as and when needed.

In event-driven system control input is updated on the occurrence of a particular event rather than specified time [**Error! Reference source not found.**]. For NCS point of view, the sample is sent to the controller when the error (Tracking or stabilization) is large from the specified limit [**Error! Reference source not found.**].We can classified event-triggered the system into continuous time event triggered system (CTETS)[**Error! Reference source not found.**] , the periodic event-triggered system (PETS) [**Error! Reference source not found.**], and self-triggered system (STS) [**Error! Reference source not found.**]. In CTETS systems, plant states or output monitored continuously with dedicated hardware which obviously consumes more battery, while in PETS plant's states or outputs are monitored periodically. In STS, event instant is predicted when to take a sample by the detector. From communication design perspective, researchers choose control data as priority data and try to execute as early as possible to reduce delay in communication, while control system designer, treat communication network as a source of delay and measurement noise or disturbance. So Robust controllers are designed which can tolerate these network-induced effects [**Error! Reference source not found.**]. Here we will focus co-design of Networked effects with the control system and evaluate the quality of performance from a control perspective and with less requirement of network services which motivates this paper.

In this paper, we designed a discrete event system for the speed control problem of networked DC motor with Delay, Dropout, Packet disorder, Jitter. Secondly, we designed predictive control strategy to predict the states as well as a control input. Third, we will design event triggered condition to reduce network and controller utilization. Fourth, we analyzed the system in the frequency domain. Fifth, we designed network compensator to choose correct control input in real time. Sixth, we evaluate the performance for control as well as $\dot{x}(t) = Ax(t) + Bu(t), \forall t \geq 0,$ communication perspective.

The organization of the paper is as follows: In Section 2, we described our system model, network model, assumptions and objectives. Our proposed methodology, event generation mechanism and network compensator design are given in Section 3. Thereafter, we have provided our simulation results in section 4. In section 5, conclusion and future research scope is presented.

2. Problem Formulation

2.1 System Description

The motor is a most common actuator for the purpose of automation in Industries, Smart homes, Electrical vehicles, Robots etc. A motor could be used to provide translational and rotational motion. Here for the purpose of the study, we are considering an armature controlled DC motor. A mathematical model of the motor could be derived by an electrical equivalent circuit (Fig. 1) follows:

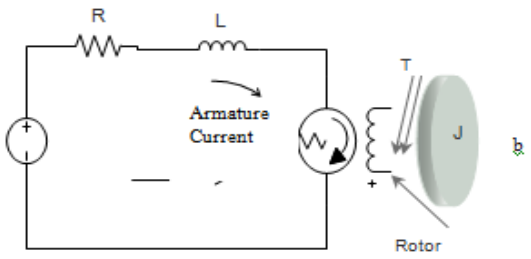

Fig. 1: Electrical equivalent circuit of the DC motor

By torque v/s armature current characteristics of the DC motor, we know that torque generated is directly proportional to the armature current 'i'.

$$T = K_t.i \tag{1}$$

whereK_t is a torque constant. The back emf, $E_b$is proportional to the angular velocity of the motor shaft.

$$E_b = K_e.\dot{\theta} \tag{2}$$

whereK_e is a back emf constant. In SI units, the motor torque and back emf constants are equal, that is, $K_t = K_e$ so from there onwards we can use K_C for the sack of notation simplicity.by Newton's 2nd law and Kirchhoff voltage law, we can derive following equations from Fig. 1,

$$J\ddot{\theta} + b\dot{\theta} = K_C i \tag{3}$$

$$L\frac{\mathrm{d}i}{\mathrm{d}t} + Ri = V - K_C\dot{\theta} \tag{4}$$

Here we assumed that magnetic field is constant. Motor shaft and rotor are rigid in nature. Let maximum and the minimum voltage applied to DC motor are V_{max} and V_{min}.

For the purpose of analysis and controller design, we can transform Eq. 3 and Eq. 4 into a state-space form which is shown in Eq. 5 and Eq. 6, here we have chosen the rotational speed $\dot{\theta}$ and electric current i as the state variables. In this problem, armature voltage and rotational speed will be input and output respectively.

$$\underset{x}{\frac{\mathrm{d}}{\mathrm{d}t}\begin{bmatrix}\dot{\theta}\\ i\end{bmatrix}} = \underbrace{\begin{bmatrix}\frac{-b}{J} & \frac{K_C}{J}\\ \frac{-K_C}{L} & \frac{-R}{L}\end{bmatrix}}_{A}\begin{bmatrix}\dot{\theta}\\ i\end{bmatrix} + \underset{B}{\begin{bmatrix}0\\ \frac{1}{L}\end{bmatrix}}V \tag{5}$$

$$y = \underset{C}{\begin{bmatrix}1 & 0\end{bmatrix}}\begin{bmatrix}\dot{\theta}\\ i\end{bmatrix} \tag{6}$$

Above equations describe the model of single DC motor. This plant could be written in the following manner:

(7)

$$u(t) = Kx(t_k), \forall t \in [t_k, t_{k+1}), \forall k \in \square \tag{8}$$

Here, the plant is modelled as linear time-invariant system and controller is modelled as linear state feedback controller, where K is controller gain. Let's suppose sampler is being activated at the time instances t_k= {1,2,3,..... }, and in between time instances sample value is piece-wise constant. Whenever the controller is activated, it takes the latest packet available at the buffer and calculates control input. The above system Eq. 7 & 8 could be written in discrete form as

$$x_{k+1} = A_d(h)x_k, \forall k \in \square$$

$$A_d = e^{Ah} + \int_0^h e^{As}dsBK$$

(9)

where,

, $x_k = x(t_k)$ and h is the constant sampling time. In case of time-varying sampling, the analysis of the above system is very complex. The networked control system operates in presence of communication delay which is shown in Fig. 2. We can modify the system Eq. 7 & 8 as

$$u(t) = Kx(t_k) = Kx(t - \tau(t)) \quad , \tag{10}$$

where, delay $\tau(t) = t - t_k, \forall t \in [t_k, t_{k+1})$, is a piecewise constant. So a time-varying system could be written as below,

$$\dot{x}(t) = Ax(t) + BKx(t - \tau(t)), \forall t \geq 0 \tag{11}$$

3. Modelling of the Network

Here, we have modeled the network with the help of queuing theory. It is an arrangement of entities in a sequential manner. For this particular paper, we are considering a packet as an entity. Here packet is used for information transformation from the sensor to the controller (samples) and from the controller to an actuator (controller input values).The server is a physical or a logical node which can provide a particular type of computation service.

Here we would like to study effects of the network on the performance of the control system. The network characteristics like delay, packet loss, network Bandwidth, scheduling policy, etc. could be modelled by a logical queue and server arrangement. In this paper we have modelled networked delay as service time of the server, packet dropout could be modelled by a switch with a terminator block. Terminator block shows the lost packet. Scheduling policy could be created by the priority queue. Higher priority could be given to concerned packet from a particular plant or from a particular time.

Here we have assumed round-robin scheduling policy. Only one packet could be transmitted at a time. The network has a minimum (T_{min}) and maximum (T_{max}) transmission time. The network has maximum packet dropout probability (P_{drop}). Here, our objectives are to design controller gain K while ensuring stability under the networked constraints. Meet performance objective (maximum overshoot should be less than 3%, settling time should be less than 2seconds, steady state error should be less than 2%).

4. Proposed Approach

Here we are proposing a discrete event full state feedback networked control system architecture which is shown in Fig. 2.

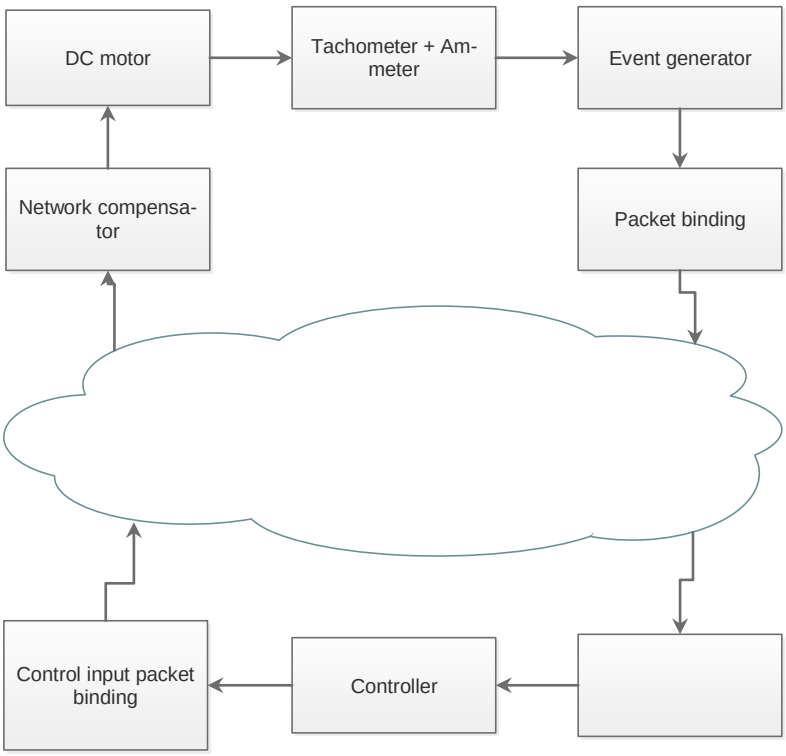

Fig. 2: Networked control system architecture

4.1 Design of Discrete Event Generation

A Continuous event (packet) generation [**Error! Reference source not found.**] could block network which results in packet loss or information delay. Here our objective is to reduced packet generation as much as possible until control performance is compromised. Here we are going to present a state differential triggering method for event generation. Here we can observe the local state in continuous, periodic or predicted instants, then compare the threshold condition, if the sample violates the threshold condition then the particular sample is encapsulated into a packet and sent to the controller otherwise the packet

is dropped locally. Here, Event is defined when a current sample of observing state is more than a certain threshold value of the previously sent packet. Mathematically it could define as

$$x(k_i - 1) - x(t_i) > \delta \tag{12}$$

where, t_i= time instant at which state is being observed, k_i= time instants at which packet is being sent, $x(k_i)$ = value of the sample at k_i instant, $x(t_i)$ = value of the sample at $t_i$instant, δ = value of the threshold.

4.2 Packet Binding

We can send measurements and control sequence in one packet. Here we considered an entity as a packet which is used for the information exchange among nodes. Here, plant and controller are considered as different nodes which are connected by a packet-based network. Presently we have two existing packet type which is universal datagram protocol (UDP) and transmission control protocol (TCP). A packet consists of a header (overhead) and payload (Data).

4.3 Controller Design

Prediction of states: Let's suppose there is a bounded maximum delay τ for their physical significance. We can express this delay in multiple of sampling time. Assume that $x(k_i)$ and $u(k_i)$ are the current sampled states and current control input respectively. Then from Eq. 7, we can derive that,

$$x(k_i + 1 | k_i) = px(k_i) + qu(k_i)$$

$$x(k_i + 2 | k_i) = p^2 x(k_i) + pqu(k_i)$$

$$x(k_i + \tau | k_i) = p^{\tau} x(k_i) + p^{\tau-1} qu(k_i) + p^{\tau-2} qu(k_i) .... + qu(k_i)$$

The above equations could be represented as an augmented model below

$$X = Px(k_i) + Qu(k_i) \tag{13}$$

where,

$$P = \begin{bmatrix} p \\ p^2 \\ . \\ . \\ p^{\tau} \end{bmatrix} Q = \begin{bmatrix} q & 0 & 0 & . & . & 0 \\ pq & q & 0 & . & . & 0 \\ . & . & . & . & . & . \\ . & . & . & . & . & . \\ p^{\tau-1}q & p^{\tau-2}q & p^{\tau-3}q & . & . & q \end{bmatrix}$$

let's suppose we would like to regularize our output at $Ref(k_i)$, So here we have the objective to design a controller which bring predicted output near to the set point as soon as possible. Assume that a reference data vector $Ref(k_i)$ which have the set point information,

$$Ref(k_i)^T = \underbrace{[1 \quad 1 \quad . \quad . \quad 1]}_{\tau} s(k_i) \tag{14}$$

here, we can achieve our control objective by minimizing a cost function J,

$$J = (Ref(k_i) - X)^T (Ref(k_i) - X) + U^T \bar{R} U \tag{15}$$

we know then, for minimum J

$$\frac{\partial J}{\partial U} = 0$$

Then,

$$U = (Q^T Q + \bar{R})^{-1} Q^T (Ref(k_i) - Px(k_i)) \tag{16}$$

4.4 Design of Network Effects Compensator

Introduction of network introduces random network delay which should be taken care to improve the performance of control design. We know that in a network transmission we can pack multiple data in a single packet. So, with the controller design in the previous section, we will predict multiple control input depend on the delay bound, and send to the network compensator. Network compensator chooses right control input for the real-time delay and sends the actuator. Mathematically it should be written as

$$u_t = c(\tau) * U \quad (17)$$

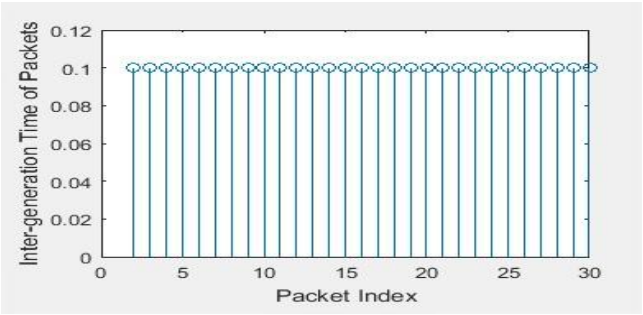

5. Simulation Results

For verification of the compensation techniques and the controller performance, we have used armature controlled DC motor as a plant. Physical parameters like Moment of inertia (J), Viscous friction constant (b), force constant ( ), torque constant ( ), motor resistance (R), inductance (L) are taken as 0.01 , 0.1 N.m.s, 0.01 , 0.01 , 1 Ohm, 0.5 respectively.

Fig. 3: Intergeneration time for checking states

Here to avoid complex continuous measurement and for saving energy we have used periodic event monitoring scheme which can be seen in Fig. 3, periodic check of state for event recognition is done with 0.1s intergeneration time(IGT).

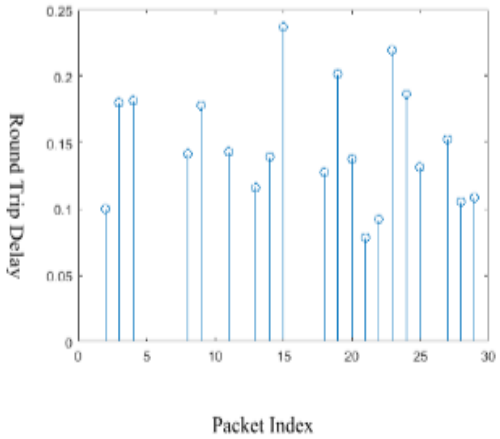

Fig. 4: Random round trip delay for each packet

At each inter-generation time we check the threshold violation, if it occurs then the particular sample value is packed and sent to the controller, else it is discarded locally. In Fig. 4, random network delay is seen during transmission. Step response of DC motor for speed regulation could be seen in Fig. 5, all the transient and steady-state performance, we have decided is being full-filled by the proposed design.

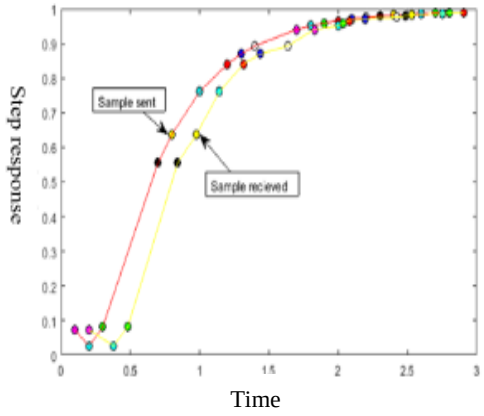

Fig. 5: Step response of Speed control of DC motor

6. Conclusion

Here, we have solved speed regulation Problem under random networked delay. In this paper, we have modelled NCS as queue server model which could easily capture the effects of network delay and packet dropout and jitter. Here we have considered round trip delay which is a summation of delay occurred in feedback channel, forward channel, computation delay, and delay due to packet loss. A predictive control scheme is used to generate future control input according to delay bound. A network effects compensator is designed. A simulation has been perform to show the suitability of the method. A controller is designed which is capable to meet the desired performance under networked scenario.

7. Acknowledgement

The authors acknowledge the financial support given by TEQIP-III, NIT Silchar, Silchar - 788010, Assam, India.

References

[1] Mani Amoozadeh, Mani Amoozadeh, and Mani Amoozadeh. Platoon Management with Cooperative Adaptive Cruise Control Enabled by VANET. Ecology, 86(1):2418–2427, 2015.

[2] Adolfo Anta and Paulo Tabuada. To sample or not to sample: Self-triggered control for nonlinear systems. IEEE Transactions on Automatic Control, 55(9):2030–2042, Sept 2010.

[3] Leonardo Ascorti, Stefano Savazzi, Gloria Soatti, Monica Nicoli, Emiliano Sisinni, and Stefano Galimberti. A Wireless Cloud Network Platform for Industrial Process Automation: Critical Data Publishing and Distributed Sensing. IEEE Transactions on Instrumentation and Measurement, 66(4):592–603, 2017.

[4] John Baillieul and Panos J. Antsaklis. Control and communication challenges in networked real-time systems. Proc. IEEE, 95(1):9–28, 2007.

[5] B Besselink, V Turri, S H Van De Hoef, K.-Y. Liang, A Alam, and K H Johansson. Cyber-Physical Control of Road Freight Transport. Proceedings of the IEEE, 104(5):1128–1141, 2016.

[6] Naveen Bibinagar, Won-jong Jong Kim, and Senior Member. Switched ethernet-based real-time networked control system with multiple-client-server architecture. IEEE/ASME Transactions on Mechatronics, 18(1):104–112, 2013.

[7] Zoleikha Abdollahi Biron and Pierluigi Pisu. Distributed fault detection and estimation for cooperative adaptive cruise control sys-

tem in a platoon. In Proceedings of the Annual Conference of the Prognostics and Health Management Society, PHM, pages 711–716. Prognostics and Health Management Society, 2015.
[8] Jie Chen, Su Meng, and Jian Sun. Stability Analysis of Networked Control Systems With Aperiodic Sampling and Time-Varying Delay. IEEE Transactions on Cybernetics, pages 1–9, 2016.
[9] Manuel Diaz, Cristian Martin, and Bartolom?? Rubio. State-of-the-art, challenges, and open issues in the integration of Internet of things and cloud computing. Journal of Network and Computer Applications, 67:99–117, 2016.
[10] Truong Quang Dinh, Kyoung Kwan Ahn, and James Marco. A novel robust predictive control system over imperfect networks. IEEE Transactions on Industrial Electronics, 64(2):1751–1761, 2017.
[11] Ahmed Elmahdi, Ahmad F. Taha, Stefen Hui, and Stanislaw H. Zak. A hybrid scheduling protocol to improve quality of service in networked control systems. In 2012 50th Annual Allerton Conference on Communication, Control, and Computing, Allerton 2012, pages 98–105, 2012.
[12] Ge, Xiaohua, Fuwen Yang, and Qing-Long Han. "Distributed networked control systems: A brief overview." Information Sciences 380 (2017): 117-131.
[13] Yuan Ge, Qigong Chen, Ming Jiang, and Yiqing Huang. Modeling of Random Delays in Networked Control Systems. Journal of Control Science and Engineering, 2013:1–9, Jul 2013.
[14] Zhou Gu, Peng Shi, and Dong Yue. An adaptive event-triggering scheme for networked interconnected control system with stochastic uncertainty. International Journal of Robust and Nonlinear Control, 27(2):236–251, 2017.
[15] Zhou Gu, Engang Tian, and Jinliang Liu. Adaptive event-triggered control of a class of nonlinear networked systems. Journal of the Franklin Institute, 354(9):3854–3871, 2017.
[16] Rachana Ashok Gupta and Mo-Yuen Chow. Networked Control System: Overview and Research Trends. IEEE Transaction on Industrial Electronics, 57(7):2527–2535, 2010.
[17] W.P.M.H. P M H Heemels and M.C.F. C F Donkers. Model-based periodic event-triggered control for linear systems. Automatica, 49(3):698–711, 2013.
[18] Hespanha, J. P., Naghshtabrizi, P., & Xu, Y. (2007). A survey of recent results in networked control systems. Proceedings of the IEEE, 95(1), 138-162.
[19] Hu, W., Liu, G. P., & Rees, D. (2006, June). Design and implementation of networked predictive control systems based on round trip time delay measurement. In American Control Conference, 2006 (pp. 6-pp). IEEE.
[20] Hua, C. C., Yu, S. C., & Guan, X. P. (2014). A robust H∞ control approach for a class of networked control systems with sampling jitter and packet-dropout. International Journal of Control, Automation and Systems, 12(4), 759-768.
[21] Huang, C., Bai, Y., & Liu, X. (2010). H-infinity state feedback control for a class of networked cascade control systems with uncertain delay. IEEE Transactions on Industrial Informatics, 6(1), 62-72.
[22] Dongyao Jia, Kejie Lu, Jianping Wang, Xiang Zhang, Xuemin Shen, Senior Member, Jianping Wang, and Xiang Zhang. A survey on platoon-based vehicular cyber-physical systems. IEEE Communications Surveys and Tutorials, 18(1):263–284, jan 2016.
[23] Won-jong Kim, Kun Ji, and Abhinav Srivastava. Network-based control with real-time prediction of delayed/lost sensor data. IEEE Transactions on Control Systems Technology, 14(1):182–185, 2006.
[24] Zhongcheng Lei, Wenshan Hu, Hong Zhou, Liang Zhong, and Xingran Gao. DC motor control in a 3D real-time virtual laboratory environment. In 12th International Conference on Remote Engineering and Virtual Instrumentation (REV), pages 18–23, February 2015.
[25] Hongbo Li. EDA-Based Speed Control of a Networked DC Motor SystemWith Time Delays and Packet Losses. IEEE Transactions on Industrial Electronics, 56(5):1727–1735, 2009.
[26] Meng Li and Yong Chen. Robust Tracking Control of Networked Control Systems With Communication Constraints and External Disturbance. IEEE Transactions on Industrial Electronics, 64(5):4037–4047, 2017.
[27] Mu Li, Lihua Dou, and Jian Sun. Stability of an improved dynamic quantised system with time-varying delay and packet losses. IET Control Theory & Applications, 9(6):988–995, 2015.
[28] G.P. Liu, D Rees, and S.C. Cbai. Design and practical implementation of networked predictive control systems. Proceedings. 2005 IEEE Networking, Sensing and Control, 2005, pages 336–341, 2005.
[29] Guo-ping Liu, Yuanqing Xia, David Rees, and Wenshan Hu. Design and Stability Criteria of Networked Predictive Control Systems With Random Network Delay in the Feedback Channel. IEEE Transactions on Systems, Man and Cybernetics, Part C (Applications and Reviews), 37(2):173–184, 2007.
[30] Ren C. Luo, Cheng Tse Chen, and Yueh Ju Pu. Internet based remote supervisory system for tele-medicine robot application. In Proceedings of IEEE Workshop on Advanced Robotics and its Social Impacts, ARSO, pages 153–158, 2009.
[31] Ren C. Luo and Tse Min Chen. Development of a multibehavior-based mobile robot for remote supervisory control through the Internet. IEEE/ASME Trans. Mechatronics, 5(4):376–385, 2000.
[32] Zhong-Hua Pang. Design and Performance Analysis of Incremental Networked Predictive Control Systems. IEEE Transactions on Cybernetics, 46(6):14000, 2016.
[33] Chen Peng, Y. Dong, F. Min-Rui, Dong Yue, Min-Rui Fei, Y. Dong, and F. Min-Rui. A Higher Energy Efficient Sampling Scheme for Networked Control Systems over IEEE 802.15.4 Wireless Networks. IEEE Transactions on Industrial Informatics, 3203(c):1–1, Oct 2015.
[34] Chen Peng and Q.-L. Qing Long Q.-L. Qing Long Han. On Designing a Novel Self-Triggered Sampling Scheme for Networked Control Systems with Data Losses and Communication Delays. IEEE Transactions on Industrial Electronics, 63(2):1239–1248, Feb 2016.
[35] Chen Peng, Qing Long Han, and Dong Yue. To transmit or not to transmit: A discrete event-triggered communication scheme for networked takagi-sugeno fuzzy systems. IEEE Transactions on Fuzzy Systems, 21(1):164–170, 2013.
[36] Partha Pratim Ray. Internet of Robotic Things: Concept, Technologies, and Challenges. IEEE Access, 4:9489–9500, 2016.
[37] P. Remya and Jeevamma Jacob. Static network access scheduling and stabilization of two inverted pendulums spring coupled networked control system. In Proceedings of IEEE International Conference on Advanced Communication, Control and Computing Technologies, ICACCCT 2014, pages 98–103, 2015.
[38] Luisa Repele, Riccardo Muradore, Davide Quaglia, and Paolo Fiorini. Improving performance of networked control systems by using adaptive buffering. IEEE Transactions on Industrial Electronics, 61(9):4847–4856, 2014.
[39] R. Sakthivel, Srimanta Santra, K. Mathiyalagan, and S. Marshal Anthoni. Observer-based control for switched networked control systems with missing data. International Journal of Machine Learning and Cybernetics, 6(4):677–686, Aug 2015.
[40] Peng Shi, Wei Wang, Xi-Ming Sun, and Di Wu. Robust predictive control for networked control and application to DC-motor control. IET Control Theory & Applications, 8(14):1312–1320, 2014.
[41] Xi Ming Sun, Di Wu, Guo Ping Liu, and Wei Wang. Input-to-state stability for networked predictive control with random delays in both feedback and forward channels. IEEE Transactions on Industrial Electronics, 61(7):3519–3526, 2014.
[42] Paulo Tabuada and Senior Member. Event-triggered real-time scheduling of stabilizing control tasks. IEEE Transactions on Automatic Control, 52(9):1680–1685, Sept 2007.
[43] Chengen Wang, Zhuming Bi, and Li Da Xu. IoT and cloud computing in automation of assembly modeling systems. IEEE Transactions on Industrial Informatics, 10(2):1426–1434, 2014.
[44] Rui Wang, Guo-ping Liu, Wei Wang, David Rees, and Yun-bo Zhao. H âˆž Control for Networked Predictive Control Systems Based on the Switched Lyapunov Function Method. 57(10):3565–3571, 2010.
[45] Wang, Y., Wang, P., Li, Z., & Chen, H. (2017). Observer-based controller design for a class of nonlinear networked control systems with random time-delays modeled by Markov chains. Journal of Control Science and Engineering, 2017.
[46] Di Wu, Xi Ming Sun, Ying Tan, and Wei Wang. On Designing Event-Triggered Schemes for Networked Control Systems Subject to One-Step Packet Dropout. IEEE Transactions on Industrial Informatics, 12(3):902–910, 2016.
[47] Yuanqing Xia. Cloud control systems. IEEE/CAA Journal of Automatica Sinica, 2(2):134–142, 2015.
[48] Guangming Xiong, Hao Li, Yaying Jin, Jianwei Gong, and Huiyan Chen. Collision Avoidance System with Cooperative Adaptive Cruise Control in Highway Entrance Ramp Environment. In 2017 18th International Conference on Advanced Robotics (ICAR), pages 549–553, July 2017.
[49] Yan, H., Yan, S., Zhang, H., & Zhao, X. (2014). An overview of networked control of complex dynamic systems. Mathematical problems in Engineering, 2014.

[50] Yang, T., Fei, M., Xue, D., Tan, Y., & Zhou, X. (2006, August). A proposed case study for networked control system. In International Conference on Intelligent Computing (pp. 1026-1036). Springer, Berlin, Heidelberg.
[51] Ke-You YOU and Li-Hua XIE. Survey of Recent Progress in Networked Control Systems. Acta Automatica Sinica, 39(2):101–117, 2013.
[52] Y. Yuan, H. Yuan, Z. Wang, L. Guo, and H. Yang. Optimal control for networked control systems with disturbances: A delta operator approach. IET Control Theory and Applications, 11(9), 2017.
[53] Wente Zeng and Mo Yuen Chow. Optimal tradeoff between performance and security in networked control systems based on coevolutionary algorithms. IEEE Transactions on Industrial Electronics, 59(7):3016–3025, 2012.
[54] Changzhu Z Zhang, Gang Feng, Jianbin B Qiu, and Yanyan Y Shen. Control synthesis for a class of linear network-based systems with communication constraints. IEEE Transactions on Industrial Electronics, 60(8):3339–3348, 2013.
[55] Xian-Ming Zhang, Qing-Long Han, and Xinghuo Yu. Survey on Recent Advances in Networked Control Systems. IEEE Transactions on Industrial Informatics, 12(5):1740–1752, 2015.
[56] Yun Bo Zhao, Guo Ping Liu, and David Rees. Design of a packet-based control framework for networked control systems. IEEE Transactions on Control Systems Technology, 17(4), 2009.
[57] Baolong Zhu and Min Li. Double-Loop Networked Control System of DC Motor Based on Dynamic Smith Predictor and Fuzzy-PI Controller. Proceedings of International Conference on Mechatronic Sciences, Electric Engineering and Computer (MEC), pages 163–167, 2013.