



CPW based Band Pass Filter Using DGS for ISM Band Applications

Mrs. S. Jalaja^{1*}, Dr. V. Prithvirajan², K. Gajalakshimi³, S. Chitra⁴, R. Nithya⁵

^{1,2} Assistant Professor, ^{3,4,5} Student Department of Electronics and Communication Engineering, Vel Tech High Tech Dr. Rangarajan Dr. Sakunthala Engineering College, Avadi.

*Corresponding author E-mail: drprithvirajan@velhightech.com¹, jalaja@velhightech.com²

Abstract

The design and simulation of coplanar waveguide (CPW) bandpass filter (BPF) has been described in this paper. It mainly focuses on Defected Ground Structure (DGS), where U-shaped DGS with open stub in transmission line has been introduced. By etching the DGS pattern in ground and transmission will change the distribution of inductance and capacitance to produce filtering effect. This paper also discusses about the influence of geometrical parameter l for the improvement in the frequency response of bandpass filter. As increasing the dimension of the geometric parameter l shift the center frequency to the higher frequencies. This filter offers a bandwidth of 1.65 GHz with passband ranging from 2.1 GHz to 3.75 GHz with a stopband rejection is about -28 dB.

Keywords: Coplanar waveguide, Defected Ground Structure, Bandpass filter

1. Introduction

The explosive growth in wireless communication and other portable receiver and transmitter applications need a filter with low loss, smaller size, light weight, and low cost filters. More over filters are mainly used in front ends of microwave communication in radars and measurement system to select a required band of signal with reduced losses. The microwave filter can be designed with some of the techniques such as High Temperature Superconducting (HTS) material, Bulk Acoustic Wave (BAW) or Surface Acoustic Wave (SAW) devices. But all these techniques are fabricated using microstrip line technology. However, among the planar microwave transmission line topologies, the coplanar waveguide (CPW) has very good characteristics at high frequencies, and flexibility for assembling shunt as well as series components on a single plane.

Bandpass filters are essential components of most microwave and mobile communication system. Such system usually requires better filter structure. Additionally such filter must have a high rejection in the stop-band. The performance of the filter can be modified by following ways:

Asymmetric structure, where the gap between the transmission line and ground is varied [10] [14]. Defect on ground and defect on transmission lines are some other methods to improve the performance. The goal of the defected ground structure is to change the guide wave properties, by etching the lattice shape in the ground plane, for providing a better filtering effect [6]. In this some portion of the ground or transmission line is etched to change the characteristics without increasing the circuit size [4] [3] [6] [7] [9] [10] [11] [13] [15]. Defect on transmission line may use open stub, shorting stub for filter design, which can be further modified to achieve better performance [2]. Selectivity of the filter is further improved by using a cascaded DGS. In this, defect on the ground or transmission line is cascaded to eliminate the un-

wanted response [1] [5] [12]. The proposed filter consist of U-shape DGS with open stub in the transmission line.

2. Existing Filter Design

TamasiMoyra et.al proposed T-shaped DGS in the ground of coplanar waveguide. The T-shaped DGS is a modified structure of dumbbell shape DGS, provides a wide stop band. The capacitance of T-shaped DGS is higher than the capacitance of dumbbell shaped DGS. It introduces low pass filter response. But it has an insertion loss of -1.2 dB in pass band. The insertion loss can be reduced with the help of high-low coplanar waveguide transmission line [11]. AmitGhosh et.al proposed the open stub in transmission line. In this selectivity is improved by cascaded DGS. A Number of stubs were increased to improve the selectivity and insertion loss. As increasing the number of stub the insertion loss and size of the filter also increases [1]. The existing design has limitation on high insertion loss for increased number of stubs. As number of stubs increases, the size increases. So the number of stubs should be chosen minimum provided the insertion loss should be minimum and high selectivity

3. Proposed Filter Design

Defected

In order to provide a solution to above problems, a bandpass filter with DGS has been designed with minimum number of stubs



Fig1: schematic diagram of proposed bandpass filter

The behavior of the structure has been simulated using HFSS electromagnetic solver. The proposed filter introduces a high rejection in the stopband. The proposed bandpass DGS filter has produces a passband ranging from 2.1 GHz to 3.75 GHz with a stopband rejection of more than -28 dB.

Fig. 1 shows the schematic diagram of the proposed bandpass filter. It has been constructed with U-shape DGS with open stub in the transmission line. The U-shape DGS is etched in both side of the ground plane. The coplanar waveguide lines used for this filter were designed to have a characteristic impedance of 50 Ω. This impedance corresponds to G/W/G of 1.25/3.5/1.25.the filter has been built on FR4 substrate that has a relative dielectric constant of 4.5 and thickness of 1.6 mm. Geometrical parameter of the filter structure are $l=2.42$ mm. The total area of the bandpass filter is 29.42×27 mm². The substrate is covered by copper layer with a thickness of 0.017 mm. The layout and dimension of a designed filter is mentioned in figure 1. The response shows that the filter will allow frequency from 2.1 GHz to 3.75 GHz. open stub in the transmission line introduces a series inductor with parallel capacitor. The parallel capacitance produced due to the gap in the open stub and the inductance is due to the self inductance in transmission line. From the design made it has been found that Series inductance with parallel capacitance act as a resonant circuit so that it produces a response of bandpass filter.

4. Optimization of the Filter

The length l is chosen for optimization based on current distribution in surface. By means of varying the length it has been found that an optimal length of $l=2.42$ mm produces a passband of 2.1 GHz to 3.75 GHz and has a resonance frequency at 3.2 GHz. More over a better insertion loss at the passband is -0.4179 dB and return loss is -30.4008 dB is achieved with filter as shown in figure 2. By inferring fig. 2-5 the resonance at two frequencies is eliminated by increasing the length l . As further increasing the length l , losses of the filter also get increases. So the length $l=2.42$ mm is a minimum length for better performance.

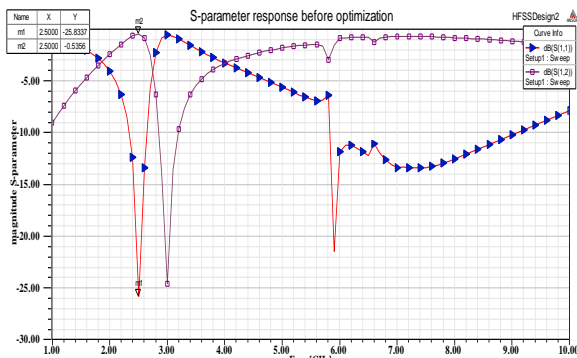


Fig.2: EM simulation result before optimization

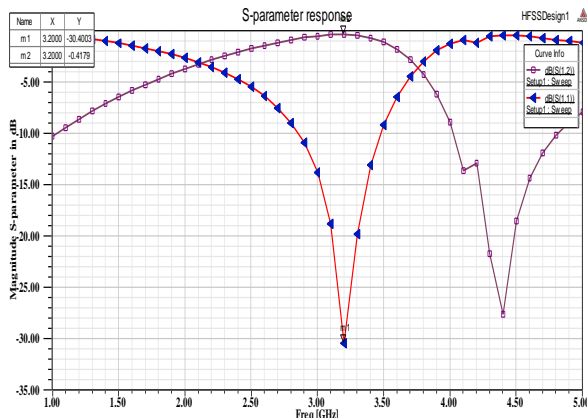


Fig.3: EM simulation result for the proposed bandpass DGS filter

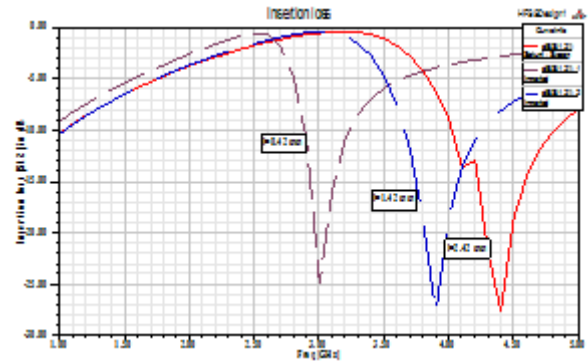


Fig.4: EM simulation of insertion loss for the different values of the geometrical parameter l

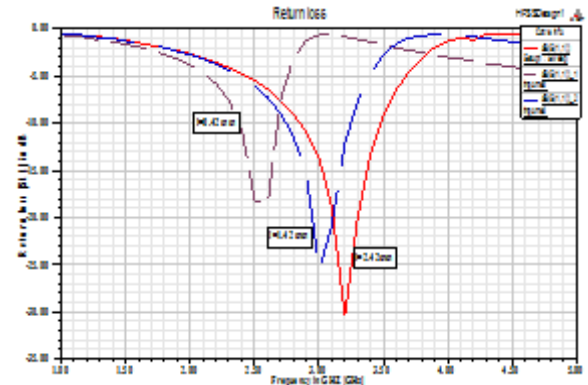


Fig.5: EM simulation of return loss for the different values of the geometrical parameter l

For controlling the frequency response the geometrical parameter of length l has been used. Figure 4 and figure 5 shows the influence of length l on the filter response. As can be seen reducing the length of the DGS shift the center frequency to lower frequencies and vice versa. Figure 4 and Figure 5 shows the insertion loss and return loss response for various dimensions of Length l . Fig. 5 shows the characteristics of filter for various length l .

5. Conclusion

A compact bandpass filter using U-shape DGS with open stub in transmission line has been proposed. For the designed filter bandpass filter response has been introduced with single open stub in transmission line. So the total size of the filter has been reduced. The filter has been designed on FR4 substrate so the total cost of the filter design also reduces. The proposed filter has better stopband rejection of -28 dB. The proposed filter has a bandwidth of 1.65 GHz ranging from 2.1 GHz to 3.75 GHz. The Bandpass filter has an insertion loss of -0.4179 dB and return loss of -30.4003 dB by compromising the selectivity of the filter. That is the transition from stopband to passband and passband to stopband is gradual not a sharp transition.

References

- [1] A. Ghosh, R. Vaswata Roy Choudhury, Design and Fabrication of a S band Multi-stub CPW Band Pass Filter for improved Filter Characteristics, International Conference on Microwave and Photonics (ICMAP), (2015).
- [2] C. Y. Chin, R. B. Hwang, A CPW bandpass filter using defected ground structure with shorting stubs for 60 GHz applications, IEEE International Conference on Applications of Electromagnetism and Student Innovation Competition Awards, (2012).
- [3] R. N. Simons, Coplanar Waveguide Circuits, Components, and Systems, NASA Glenn Research Center Cleveland, Ohio. 2000.
- [4] E. K. I. Hamad, A. M. E. Safwat, A. S. Omar, Controlled capacitance and inductance behaviour of L-shaped defected ground struc-

- ture for coplanar waveguide, IEEE Proceedings - Microwaves, Antennas and Propagation, (2012).
- [5] B. Heba, E. Shaarawy, R. Planal, M. E. Said, E. A. Hashish, A Novel Reconfigurable DGS Cell for Multi-Stopband Filter on CPW Technology, IEEE Microwave Conference, (2008).
 - [6] H. Jung and L. Gang, Triangle-shaped defected ground structure for coplanar waveguide, IEEE Microwave Conference, (2008).
 - [7] J. S. Lim, C. S. Kim, Y. T. Lee, and S. Nam, A Spiral-Shaped Defected Ground Structure for Coplanar Waveguide, IEEE Microwave and Wireless Components Letters (2002).
 - [8] M. Xu, W. Yu, H. Deng, J. Mou, L. Chen, Design of a Novel V-band Coplanar Waveguide Low-pass Filter Based on Defected Ground Structures, IEEE International Conference on Microwave Technology & Computational Electromagnetics, (2009).
 - [9] A. Omar, A. Batmanov, A. Boutejdar, A. Balalem, and E. Burte, New Coplanar Low-Pass Defected Ground Structure (DGS) Filter, Ultra-Wideband, Short Pulse Electromagnetics, (2002).
 - [10] Thomas. H. Lee, Planar microwave engineering, John. Willey Pub. 2001.
 - [11] T. Moyra, S. Kumar and S. Das, Design of coplanar-waveguide-based elliptic filter using T-shaped defected ground structure, IEEE Waves in Random and Complex Media, (2013).
 - [12] Brian C. Wadell, Transmission Line Design Handbook, 1991.
 - [13] U. Surendar, G. BrenieSekar, A Novel CPW Bandpass Filter Based On Negative Indexed Materials For Wi-Max Application, International Conference on Information Communication and Embedded Systems (2014).
 - [14] X. Li, Asymmetric Coplanar Waveguide Filter with Defected Ground Structure, IEEE General Assembly and Scientific Symposium, (2014).
 - [15] Y. Yindi, Z. Zhibin, Wideband bandstop defected ground structure filter with enhanced common-mode suppression using split ring, The Journal of China Universities of Posts and Telecommunications, (2015).