



Performance parameters of protocol AOMDV under random obstacle mobility model

Enciso Liliana ^{1*}, Mengual Luis ¹

¹ Departamento de Ciencias de la Computación y Electrónica, Universidad Técnica Particular de Loja, Ecuador

² Facultad de Informática, Universidad Politécnica de Madrid, Spain

*Corresponding author E-mail: lenciso@utpl.edu.ec

Abstract

A Mobile Ad Hoc Network (MANET) is a collection of mobile nodes that are dynamically self-configured, with no physical infrastructure nor centralized administration. In this article, we discuss which of the routing strategies for MANETs: proactive, reactive or hybrid, has a better performance. For the measurement, we have established thirty-six simulation for emergency scenarios in an urban area. This involved, in addition to quality of service (QoS) parameters defined, the calculation of the node densities and the usage of a mobility model needed to validate the results. These must determine which routing protocol has better QoS under the Random Obstacle Mobility Model. The simulator using was NS2 version 2.35.

Keywords: Ad Hoc Networks; AODV; AOMDV; DSDV; MANET; QoS; Random Obstacle Mobility Model.

1. Introduction

A MANET is a collection of autonomous mobile nodes communicating; there is no fixed network infrastructure. In this environment, nodes are involved in decision-making, performing maintenance duties and taking part in routing algorithms. In general, any proposal applicable to a MANET must take into account the constraints imposed by the inherent characteristics of these networks. These characteristics are defined in [1] and they are: dynamic topology, limited bandwidth links, energy constraints [2], physical security constraints [3], and processing capacity of the nodes. So far, research efforts have primarily focused on routing issues. Considering that routing is one of the most important mechanisms in MANETs, others like QoS provided or security and service discovery, cannot be executed if there is no optimal communication link [3]. Boost of new applications has enabled more people to use and take advantage of smart devices o smartphone[4]. Users understood as nodes in the MANET, work inside a set of elements denoted scenario. A scenario is composed of a particular number of nodes, topography and a mobility algorithm, which includes direction, speed and pauses of those nodes. In case of a real scenario, the topography is haphazard due to the amount of obstacles arising from undesired events that cause the alteration of usual mobility pathways. Therefore, the motion algorithm is determined according to the topography and the corresponding nodes that must be displaced depending on the obstacles. The number of nodes depends on the MANET network and of course [5], if it is in an urban or in a rural area. When there is a non-planned event, normal mobility routes change, and new rescue and evacuation routes are recalculated. The main objective of this work is to determine which of the Ad Hoc strategies reviewed, has a better performance. For the comparative analysis on QoS parameters [6], we chose one routing protocol from each of the following groups: Proactive, Reactive and Hybrid [7] [8]. The simulation was performed for any urban area, under the Random Obstacle Mobility Model, for twenty-four scenarios, and with help of the NS2 (Network Simulator version 2) tool [9].

2. Related work

The types of routing protocols analyzed in this research paper are broadly described next.

2.1. Routing protocols

Proactive routing protocols maintain information on all routes throughout the network, even if they are not required, so each node can have them registered [10]. Generally, these protocols exchange control information between nodes to keep updated routing tables in the entire network [11]. They also react when a new node appears or when another node is no longer within the network topology. Most known proactive protocols are: Destination-Sequence Distance-Vector (DSDV) [12] and Optimized Link State Routing (OLSR) [13]. The DSDV protocol [12] solves the major problem associated with distance vector routing of wired networks i.e., Count-to-infinity, by using destination sequence number. The DSDV protocol requires each mobile station to advertise to each of its current neighbors. However, this protocol requires each node to maintain routing tables. These routing tables cause a significant amount of memory overhead at each node as the size of the network increases.



as the central positions are heavier than others. That's why for the simulation of the analyzed routing protocols AOMDV, DSDV and AODV, we used the Random Obstacle Mobility Model, which looks for a big range of possibilities for your next move. In this mobility model, obstacles are randomly distributed in an urban area, which for simulation purposes, would interfere with the normal process of communication between nodes.

The purpose of this model is to obtain a real approach for the movement of an Ad hoc network operated by humans, to apply it in various fields such as disaster areas by earthquake, fire, etc., where rescue teams such as doctors, firefighters, police and more, are facing a stage full of obstacles. The X node first sets i as the start point of mobility and f as the destination, then it analyzes the vertex so_1 and so_2 from the nearest obstacle from f node, which is SO. In case this vertex is inaccessible due to a SO obstacle, the node selects a vertex fo_4 , nearest to obstacle FO and to the so_1 vertex from SO. This is done until reaching your destination f, as shown in Figure 2.

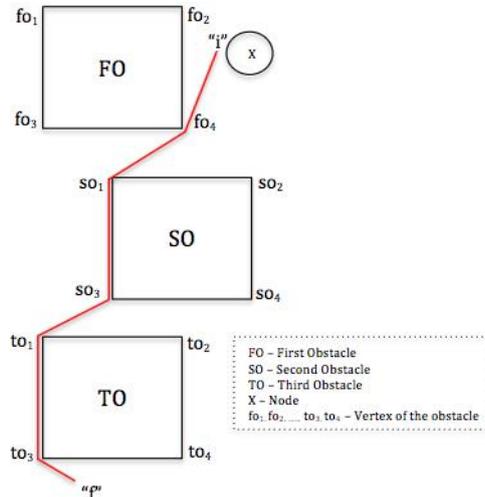


Fig. 2: An Example of the Random Obstacle Mobility Model.

We have seen how the mobility model used in this simulation of routing protocols shows a realistic behavior of people around obstacles. When a person moves to a particular point, it is reasonable to assume that he will try to go dodging the obstacles in the way, to reach the desired destination, even if at the end, this is not the most optimal path in terms of the total distance. In most cases, obstacles are unknown for a person moving in those areas. Below is the process architecture considering all components from the beginning of the simulation, to the results here discussed (Figure 3).

At next, we will set the variables to simulate scenarios, starting with the calculation of the node densities in an area of 1000m x 2000m (Figure 4).

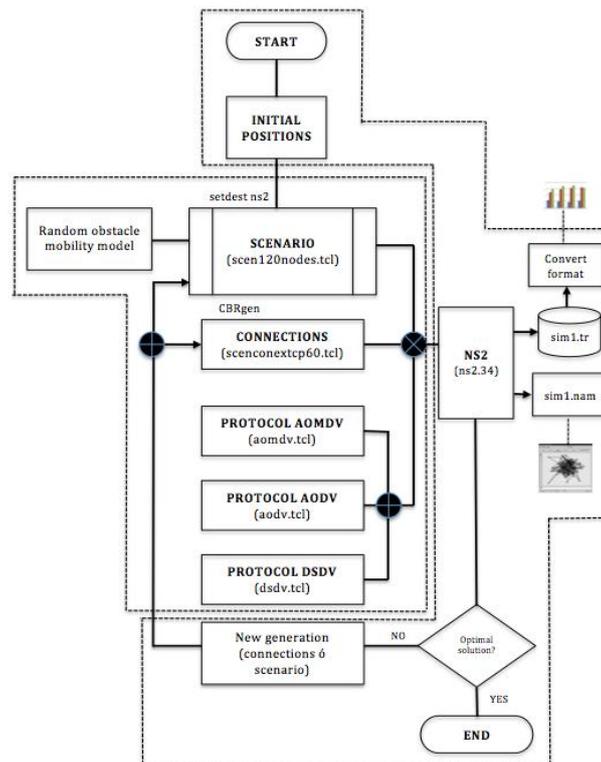


Fig. 3: Process of Simulation of Protocols under Random Obstacle Mobility Model.

3. Proposed scenario

3.1 Simulation process of real scenario chosen and node density calculation

The calculation of the node density P_{nodes} is supported by information obtained from the Ecuadorian census in 2010. An important factor for the calculation of the node density is the percentage of the Economically Active Population (PEA). To calculate the density of nodes the following equation has been proposed [6] [28].

We found that P_{nodes0} , P_{nodes2} and P_{nodes3} are 90, 120 and 150, respectively. The node densities for simulation are: $P_{nodes0} = 90$, $P_{nodes1} = 97$, $P_{nodes2} = 120$ and $P_{nodes3} = 150$.

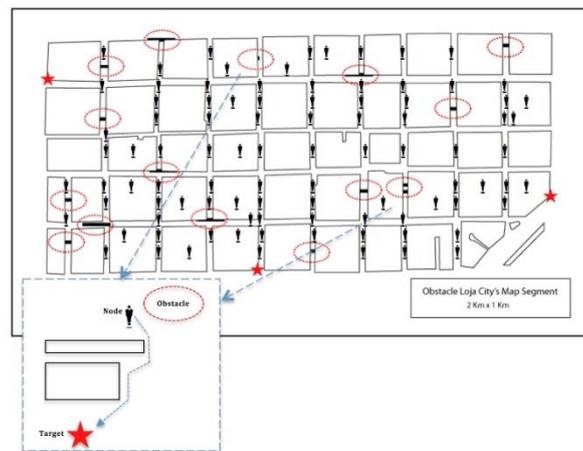


Fig. 4: Random Obstacle Mobility Model in Area 1000m X 2000m.

3.2. Creating scenarios

Using a terminal, we entered the following directory: ns-allinone, then we accessed ns2.35/indeputils/cmugen/setdest/setdest, in order to create a scenario of 120 nodes with the following command `./set-dest-v 120-2-n-m 2 s 1 m 6-t- 150-P-1-p 2 x 2000-and 1000`. The sample was successfully created and named Scenario1. This should be replicated to the other scenarios we need to create. In the command shown: run-v 2, which is the scenario generator version; we identify: n, which means the number of nodes; s, is the kind of speed (1 = Uniform); minspeed, represented with lowercase m, is the minimum speed in m/s; maxspeed, represented with uppercase m, is the maximum speed in m/s; -t, indicating the simulation time in seconds; -P is the pause time simulation in seconds; maxX, the size in meters for the X dimension; maxY, the size in meters for the Y dimension; and finally [outdir = file], Filename motion itself scenario name. The directory should be reopened to verify the creation of all scenarios.

3.3. Creating connections

First, we entered ns-allinone, then, the next route is ns2.35/indeputils/cmugen/setdest/. In this direction, the cbrgen.tcl file is located, this file serves me as a basis to create the connections, it should be emphasized that for this scenarios we created two types of connections 30 and 60 for the amount of 90, 97, 120 and 150 nodes. To generate the connections, we accessed via a terminal ns2.35 and executed the following command: `ns cbrgen.tcl-type tcp-nn 120 seed-mc 30-rate rate 2 > scenconextcp60`. Where: tcp -, is the type of traffic; nn -, indicates the number of nodes in the simulation; seed, random seed; mc -, connections number of connections; - rate, indicates the baud rate in pkts/sec; and finally [outdir=file] that becomes the file name connections.

3.4. Characteristics and performance metrics of routing protocols in MANETs

Commonly, there are four main metrics presented in [29] as parameters of QoS which are dropped packet (or packet delivery ratio), delay (route latency), jitter (delay variance), and bandwidth. Table 1, provides a list of popular qualitative and quantitative properties and characteristics of MANET routing protocols. [30] [31]. Some of the metrics in [31] are applied to compare proactive and reactive routing protocols in terms of overhead, scalability, and loop-freedom. The purpose of referring to performance metrics in this paper is to correlate proactive, reactive and hybrid protocols according to these metrics. Considering that some publications have contrasted routing protocols using the packet delivery ratio, control overhead, hop count, and end-to-end delay, the performance of routing protocols in this paper is mostly evaluated in terms of: delay, jitter and dropped packets with random obstacle mobility model. To define the simulation scenarios we used the same basis as in [36] [37]. Each one of these values are shown in the Table 1.

Table 1: General Parameters and Characteristics for the Simulation of AODV, DSDV and AOMDV Protocols

Parameter	Value	Observations and related works
Simulation area	1000m x 2000m	Area established within the center of the city of Loja
Mobility model	Obstacle Models (Fig.4)	Obstacle models [32, 33]
Number of nodes	90, 97, 120 and 150	To determine the behavior of protocols for different node densities
Number of connections	30, 60	random connections
Time of simulation	150	seconds
Network layer protocols	AOMDV[22],[34, DSDV [35] and AODV[16]	Proactive and reactive protocols

Table 2: Variables and Parameters in the Script for the Simulation of Protocols AODV, DSDV and AOMDV

Variable	Value	Observations
set val(chan)	Channel /Wireless- Channel	Channel Type
set val(prop)	Propagation /TwoRayGround	Radio propagation model
set val(netif)	Phy/WirelessPhy	network interface type
set val(mac)	Mac/802.11	MAC type

set val(ifq)	Queue/DropTail /PriQueue	interface queue type
set val(ll)	LL	link layer type
set val(ant)	Antenna/ Omni- Antenna	antenna model
set val(ifqlen)	100	max packet in ifq
set val(nn)	150	number of mobile nodes
set val(rp)	AODV	routing protocol
*set val(rp)	AOMDV	routing protocol
*set val(rp)	DSDV	routing protocol
set val(x)	2000	area
set val(y)	1000	area
set val(conexiones)	"connectionstep30"	connections
set val(scenario)	"scenario120nodes"	scenario
set val(stop)	150	time simulation

In order to analyze results and measure behavior of protocols, we selected some indicators from [30][38]. These indicators are: performance, protocol overhead, packet dropped, average delay and the variation of the delay or jitter. They are all compared with those of the following protocols: AOMDV, AODV and DSDV.

4. Simulation results

The NS2 simulator [9] is used to determine protocols attitude with the data shown in Table 1. In order to determine which one is the best protocol, we treated the following indicators:

- **Average delay.** This is very significant to measure for our purpose, because there is a need to send and receive network management information as soon as possible. With 30 connections, and with 120 and 150 nodes, AOMDV protocol yields little delays. Instead, with 60 connections, the panorama changes to demonstrate a great advantage in AOMDV usage over AODV and DSDV. Collected data is shown in Table 3, Table 4, Figure 5(a) and Figure 5(b).

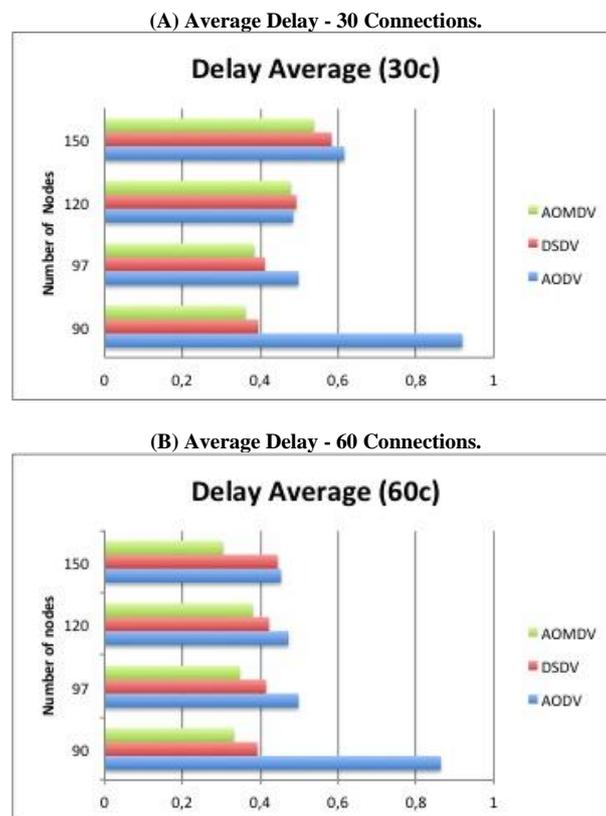


Fig. 5: Average Delay - 30 and 60 Connections with 90, 97, 120 and 150 Nodes.

Table 3: Delay Average - 30 Connections with 90, 97, 120 and 150 Nodes

Number of nodes	AODV(30c)	DSDV(30c)	AOMDV(30c)
90	0.918654	0.394391	0.361367
97	0.498009	0.411367	0.383271
120	0.483952	0.492132	0.477534
150	0.615480	0.582582	0.536986

Table 4: Delay Average - 60 Connections with 90, 97, 120 and 150 Nodes

Number of nodes	AODV(60c)	DSDV(60c)	AOMDV(60c)
90	0.863285	0.392374	0.331367
97	0.498023	0.414231	0.346918
120	0.471993	0.421802	0.379617
150	0.452916	0.444208	0.303840

- Packet delay variation** - It is the difference or delay between end-to-end communication selected packets. In MANETs, it serves to measure convergence and network stability.

Table 5: Jitter Average - 30 Connections with 90, 97, 120 And 150 Nodes

Number of nodes	AODV(30c)	DSDV(30c)	AOMDV(30c)
90	-0.098328	-0.129873	-0.094765
97	-0.097499	-0.102874	-0.041516
120	-0.015795	-0.015821	-0.005149
150	-0.009072	-0.012745	-0.003136

Table 6: Jitter Average - 60 Connections with 90, 97, 120 and 150 Nodes

Number of nodes	AODV(60c)	DSDV (60c)	AOMDV(60c)
90	-0.941367	-0.124643	-0.027436
97	-0.114973	-0.102764	-0.033419
120	-0.088908	-0.085109	-0.027638
150	-0.084256	-0.079349	-0.019921

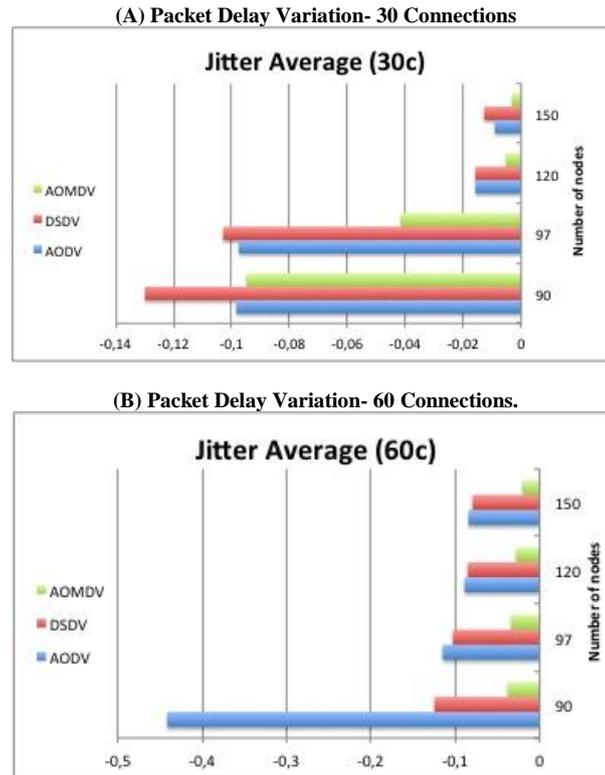


Fig. 6: Packet Delay Variation - 30 and 60 Connections with 90, 97, 120 and 150 Nodes.

This parameter is related to the mean fluctuation and helps us to determine which one of the three protocols would be the most appropriate. The protocol with the lower jitter nearest to zero is the best, and it is the AOMDV. The simulation results are shown in Table 6, Table 5, Figure 6(a) and Figure 6(b).

- Packet Dropped** - This is the amount of packets dropped by intermediate nodes due to the effects produced by its own continuous mobility, timer expiration, and unreachable destinations by Address Resolution Protocol (ARP).

Table 7: Dropped Packets - 30 Connections with 90, 97, 120 and 150 Nodes

Number of nodes	AODV(30c)	DSDV(30c)	AOMDV(30c)
90	2543	863	314
97	2820	799	269
120	3207	631	245
150	2819	429	222

Table 8: Dropped Packets - 60 Connections with 90, 97, 120 and 150 Nodes

Number of nodes	AODV (60c)	DSDV (60c)	AOMDV (60c)
90	3214	921	211
97	2820	796	187
120	2206	751	196
159	2659	496	133

The purpose of this simulation is to set up which of the three routing protocols developed shows better QoS characteristics. According to the analysis, the protocol that removes fewer packets during transmission is the AOMDV protocol, both with 30 and with 60 connections. Data is shown in Table 7 y Table 8, Figure 7(a) and Figure 7(b).

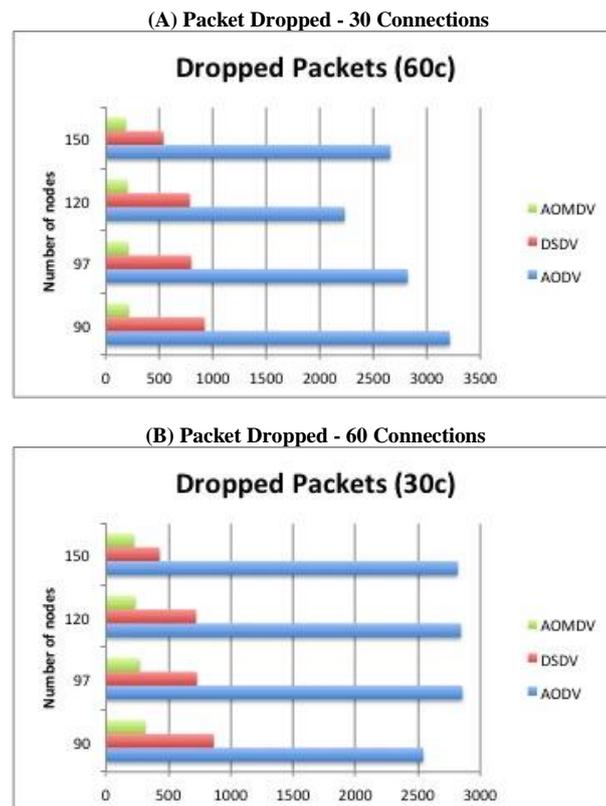


Fig. 7: Packet Dropped - 30 and 60 Connections with 90, 97, 120 and 150 Nodes.

5. Conclusions

- Mobility models are representations of human behaviors that require prior analysis and should be captured in all their dimensions. Later they are implemented on a certain area, with or without obstacles, and governed by parameters such as speed or time, among the most important.
- The Random Obstacle Mobility Model is a constant velocity model that grants QoS parameters to be analyzed reliably in routing protocols.
- Of the twenty four simulated scenarios under AODV, DSDV and AODMV routing protocols, the one that has greater compatibility with the Random Obstacle Mobility Model, and best QoS characteristics at the communication time between nodes is the AODMV.

References

- [1] N. Padmavathy and S. K. Chaturvedi, "Evaluation of mobile ad hoc network reliability using propagation-based link reliability model," *Reliability Engineering System Safety*, vol. 115, no. 0, pp. 1 – 9, 2013. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0951832013000367> <https://doi.org/10.1016/j.res.2013.01.008>.
- [2] S. Ahmed, N. Javaid, S. Yousaf, A. Ahmad, M. Sandhu, M. Imran, Z. Khan, and N. Alrajeh, "Co-laeeba: Cooperative link aware and energy efficient protocol for wireless body area networks," *Computers in Human Behavior*, vol. 51, pp. 1205–1215, 2015, cited By 3. [Online]. Available: <https://doi.org/10.1016/j.chb.2014.12.051>.
- [3] K. Saleem, A. Derhab, J. Al-Muhtadi, B. Shahzad, and M. Orgun, "Secure transfer of environmental data to enhance human decision accuracy," *Computers in Human Behavior*, vol. 51, pp. 632–639, 2015, cited By 3. <https://doi.org/10.1016/j.chb.2015.01.023>.
- [4] N. Liu and R. Yu, "Identifying design feature factors critical to acceptance and usage behavior of smartphones," *Computers in Human Behavior*, vol. 70, pp. 131–142, 2017, cited By 0. <https://doi.org/10.1016/j.chb.2016.12.073>.
- [5] J.-H. Cho, A. Swami, and I.-R. Chen, "A survey on trust management for mobile ad hoc networks," *IEEE Communications Surveys and Tutorials*, vol. 13, no. 4, pp. 562–583, 2011, cited By 208. <https://doi.org/10.1109/SURV.2011.092110.00088>.
- [6] L. Enciso and L. Mengual, "Assessment of throughput performance under ns2 in mobile ad hoc networks (manets)," 2013, pp. 338–343, cited By 0.
- [7] L. Enciso and L. Mengual, "Analysis of qos parameter in aodv a dsr in mobile ad hoc networks," 2012, pp. 276–279, cited By 0. [Online]. Available: <https://www.scopus.com/inward/record.uri?eid=2-s2.0-84864877085partnerID=40md5=1ec5278a97247faad90850155c87cb05>
- [8] NS2. "The Network Simulator NS-2," <http://www.isi.edu/nsnam/ns/>.
- [9] R. Amin, S. Ashrafch, M. Akhtar, and A. Khan, "Analyzing performance of ad hoc network mobility models in a peer-to-peer network application over mobile ad hoc network," in *Electronics and Information Engineering (ICEIE), 2010 International Conference On*, vol. 2, aug. 2010, pp. V2–344 –V2–348. <https://doi.org/10.1109/ICEIE.2010.5559795>.
- [10] A. Boukerche, B. Turgut, N. Aydin, M. Z. Ahmad, L. Bo'oni, and D. Turgut, "Routing protocols in ad hoc networks: A survey," *Computer Networks*, vol. 55, no. 13, pp. 3032–3080, 2011. <https://doi.org/10.1016/j.comnet.2011.05.010>.
- [11] A. Boukerche, S. K. Das, and A. Fabbri, "Analysis of a randomized congestion control scheme with {DSDV} routing in ad hoc wireless networks," *Journal of Parallel and Distributed Computing*, vol. 61, no. 7, pp. 967 – 995, 2001. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0743731500917234> <https://doi.org/10.1006/jpdc.2000.1723>.
- [12] T. Clausen and P. Jacquet, "Optimized link state routing protocol (olsr)," no. 3626, October 2003, RFC. [Online]. Available: <http://rfc.net/rfc3626.txt> <https://doi.org/10.17487/rfc3626>.
- [13] P. Gupta and P. Saxena, "Energy consumption in wireless ad hoc network," in *Emerging Trends in Engineering and Technology (ICETET), 2010 3rd International Conference on*, nov. 2010, pp. 831 –835. <https://doi.org/10.1109/ICETET.2010.105>.

- [14] D. Johnson, Y. Hu, and D. Maltz, "The Dynamic Source Routing Protocol (DSR) for Mobile Ad Hoc Networks for IPv4," ser. Request for Comments, no. 4728, Internet Engineering Task Force. IETF, February 2007. [Online]. Available: <http://www.ietf.org/rfc/rfc4728.txt> <https://doi.org/10.17487/rfc4728>.
- [15] C. Perkins, E. Belding-Royer, and S. Das, "Ad hoc on-demand distance vector (aodv) routing." United States: RFC Editor, 2003. <https://doi.org/10.17487/rfc3561>.
- [16] C. Perkins, E. Royer, and S. Das, "Rfc 3561 ad hoc on-demand distance vector (aodv) routing," 2003. [Online]. Available: <http://tools.ietf.org/html/rfc3561> <https://doi.org/10.17487/rfc3561>.
- [17] D. B. Johnson, D. A. Maltz, and Y. C. Hu, "The Dynamic Source Routing Protocol for Mobile Ad Hoc Networks (DSR)," Feb. 2007. [Online]. Available: <http://tools.ietf.org/html/rfc4728>. <https://doi.org/10.17487/rfc4728>.
- [18] A. Radwan, T. Mahmoud, and E. Houssein, "Evaluation comparison of some ad hoc networks routing protocols," Egyptian Informatics Journal, vol. 12, no. 2, pp. 95 – 106, 2011. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S111086651100017X> <https://doi.org/10.1016/j.eij.2011.04.001>.
- [19] F. D. Rango, J.-C. Cano, M. Fotino, C. Calafate, P. Manzoni, and S. Marano, "{OLSR} vs dsr: A comparative analysis of proactive and reactive mechanisms from an energetic point of view in wireless ad hoc networks," Computer Communications, vol. 31, no. 16, pp. 3843 – 3854, 2008, <https://doi.org/10.1016/j.comcom.2008.04.027>.
- [20] L. Layuan, L. Chunlin, and Y. Peiyan, "Performance evaluation and simulations of routing protocols in ad hoc networks," Computer Communications, vol. 30, no. 8, pp. 1890 – 1898, 2007. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S014036640700103X> <https://doi.org/10.1016/j.comcom.2007.02.015>.
- [21] D. Geetha and B. Revathi, "Article: Aomdv routing based enhanced security for black hole attack in manets," vol. ICRTCT, no. 2, February 2013, pp. 20–24, published by Foundation of Computer Science, New York, USA.
- [22] M. Balachandra, P. K.v, and K. M, "Article: Enhancing the efficiency of wireless ad hoc networks by improving the quality of service routing," vol. 3, no. 5, July 2012, pp. 51–59, published by Foundation of Computer Science, New York, USA.
- [23] H. Babaei, M. Fathi, and M. Romozi, "Obstacle mobility model based on activity area in ad hoc networks," vol. 4706, pp. 804–817, 2007. [Online]. Available: https://doi.org/10.1007/978-3-540-74477-1_72.
- [24] A. K. Abed, G. Oz, and I. Aybay, "Influence of mobility models on the performance of data dissemination and routing in wireless mobile ad hoc networks," Computers Electrical Engineering, no. 0, pp.2013. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0045790613000852>.
- [25] E. Niewiadomska-Szynkiewicz, A. Sikora, and J. Koodziej, "Modeling mobility in cooperative ad hoc networks," Mobile Networks and Applications, pp. 1–12, 2013. [Online]. Available: <https://doi.org/10.1007/s11036-013-0450-2>.
- [26] T. Camp, J. Boleng, and V. Davies, "A survey of mobility models for ad hoc network research," Wireless Communications and Mobile Computing. Special issue on Mobile Ad Hoc Networking. Research, Trends and Applications, vol. 2, pp. 483–502, 2002. ISSN 0957-4174 <https://doi.org/10.1002/wcm.72>.
- [27] Liliána Enciso Quispe, Luis Mengual Galan, Behavior of Ad Hoc routing protocols, analyzed for emergency and rescue scenarios, on a real urban area, Expert Systems with Applications, Volume 41, Issue 5, 2014, Pages 2565-2573, [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0957417413008099>. <https://doi.org/10.1016/j.eswa.2013.10.004>.
- [28] A. S. Tanenbaum, "Computer networks." Prentice-Hall PTR, 2003.
- [29] J. M. S. Corson, "Mobile Adhoc Networking (MANET):Routing Protocol Performance Issues and Evaluation Considerations," RFC 2501 (Standard), Internet Engineering Task Force, Aug. 1999. [Online]. Available: <http://www.ietf.org/rfc/rfc2501.txt>
- [30] S. Corson and J. Macker, "Mobile Ad hoc Networking (MANET): Routing Protocol Performance Issues and Evaluation Considerations, RFC 2501," Jan. 1999. [Online]. Available: <http://rfc.sunsite.dk/rfc/rfc2501.html>. <https://doi.org/10.17487/rfc2501>.
- [31] Y. Chenchen, L. Xiaohong, and Z. Dafang, "An obstacle avoidance mobility model," in Intelligent Computing and Intelligent Systems (ICIS), 2010 IEEE International Conference on, vol. 3, oct. 2010, pp. 130 –134. <https://doi.org/10.1109/ICICISYS.2010.5658821>.
- [32] N. Aschenbruck, E. Gerhards-Padilla, and P. Martini, "A survey on mobility models for performance analysis in tactical mobile networks," 2008.
- [33] M. Jiang, J. Li, and Y. C. Tay, "Cluster based routing protocol (cbrp) functional specification, internet draft, manet working group," 1999.
- [34] C. E. Perkins and P. Bhagwat, "Highly dynamic destination-sequenced distance-vector routing (dsdv) for mobile computers," 1994, pp. 234–244. <https://doi.org/10.1145/190809.190336>.
- [35] S. Kurkowski, W. Navidi, and T. Camp, "Constructing manet simulation scenarios that meet standards," in Mobile Adhoc and Sensor Systems, 2007. MASS 2007. IEEE International Conference on, Oct. 2007, pp. 1 –9. <https://doi.org/10.1109/MOBHOC.2007.4428640>.
- [36] S. Kurkowski, W. Navidi, and T. Camp, "Discovering variables that affect manet protocol performance," in Global Telecommunications Conference, 2007. GLOBECOM '07. IEEE, Nov. 2007, pp. 1237 –1242. <https://doi.org/10.1109/GLOCOM.2007.238>.
- [37] P. Chenna Reddy and P. ChandraSekhar Reddy, "Performance analysis of adhoc network routing protocols," in Ad Hoc and Ubiquitous Computing, 2006. ISAUHC '06. International Symposium on, 2006, pp. 186 –187. <https://doi.org/10.1109/ISAHUC.2006.4290671>.