*International Journal of Engineering & Technology*, 7 (4.39) (2018) 462-467

International Journal of Engineering & Technology

*Website: www.sciencepubco.com/index.php/IJET*

***Research paper***



# Optimal Design of Heavy Vehicle Suspension System Subjected to Random Road Input

**Ashish Gupta[1]*, Sumit Tiwari[2], Nagendra Maurya[3]**

*[1,2,3]G. L. Bajaj Institute of Technology & Management, INDIA*

**Corresponding author E-mail: ashish.j001@gmail.com*

**Abstract**

Vehicle suspension system plays a vital role in diminishing the vibration caused by the road roughness and prevent it from transmitting to the driver and the passenger. In this paper conventional type suspension is used for process of optimization. The computational model of suspension is created through bond graph modeling. Further this model is simulated subjected to h1 and h2 type random road condition as suggested by ISO 8608. So that the performance can be done as real time inputs and typical Indian scenario. Optimized parameters of leaf spring is obtained through $L_9$ modified orthogonal array generated by Taguchi method. These parameters are obtained for reducing the total stress by minimizing the signal to noise (Signal/Noise) ratio. Further, ANOVA is applied to determine the significant process parameters, which are mostly influencing the total stress and deflection of the spring.

***Keywords***: *leaf spring; bond graph modeling; Taguchi method; stress analysis*

## 1. Introduction

Leaf spring is the elastic member, which has the primary function to connect the wheel to the body. It is deflected or distorted under loading and return to its original shape when the load is removed. **S**uspensions of the vehicle mostly viewed as interconnections of rigid bodies with compliance and kinematic joints elements such as bushings and springs. Suspension design requires description of the interconnection points and the characteristics of compliance elements.

Tak et al. [1] suggested an algorithmic approach of concluding optimum design of suspension, where suspension parameters are expressed in terms of camber, toe, and compliance system. Koulocheris et al. [2] have combined stochastic and deterministic formulations for determining optimum vehicle suspension parameters. They have confirmed that these combination gives reliable and faster convergence to the optimum. Mitchell et al. [3] adopted a GA (Genetic Algorithm) for optimizing the geometries of vehicle suspension involving the description of a suspension model. Raghavan [4] developed an algorithm to find out the connection point locations of the tie-rod of a vehicle suspension, in order to achieve linear toe change characteristics with jounce and rebound of the wheel. Eskandari et al. [5] modified the front suspension parameters by optimize the steering behavior of passenger car. They utilized an objective function combination of eight criteria indicating steering characteristics and reduced the quantity of parameters, by implementing the design of experiments method capabilities.

In this work quarter car model of heavy vehicle suspension system is modelled through bond graph modeling. Simulation of this model is carried at average of 60 kmph in two different type random condition prescribed by ISO 8608. The other focus of this work is to optimize the various parameters of leaf of heavy vehicle system using Taguchi method and suggest the best possible design of suspension spring in each road condition.

## 2. Stress Analysis of Heavy Road Truck Suspension Spring

The spring of suspension system is effected by various forces as shown in Fig 1. Dynamic force ($F_{z\ dynamic}$) caused due to the road roughness and generated in Z-direction, whereas static force ($F_{z\ stat}$) is influenced by nominal axle load of vehicle in *Z*-direction. Braking force ($F_x$) caused due to braking acceleration (b) of the vehicle, and acting to the *X*-direction. The relation between braking force and force acting to the Z-directions is presented in equations. (1) [6].

$$F_X = \mu(F_{z,stat} + F_{z,dyn}) \tag{1}$$

where $\mu = \frac{b}{g}$ and *b* is braking deceleration (b= 2 m/sec$^2$ ), $\mu$ is adhesive friction coefficient (μ=0.2). The total stress ($\tau_t$) acting on spring can be calculated as the sum of static ($\tau_{static}$), dynamic ($\tau_{dynamic}$) and braking stress ($\tau_{brake}$).

$$\tau_{total} = \tau_{static} + \tau_{dynamic} + \tau_{brake} \tag{2}$$

Static stress of the suspension spring can be evaluated through following relation [8,9].

$$\tau_{stat} = \frac{6 F_{Z,stat} L_a L_b}{n w t^2 (L_a + L_b)} \tag{3}$$

**Copyright © 2018 Authors. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.**

Where, $L_a + L_b = 1700$ (length of the spring), $t$ is the thickness of the spring and w is width of the spring. Static force ($F_{stat}$) of the spring can be assumed as total vertical act on a suspension spring.

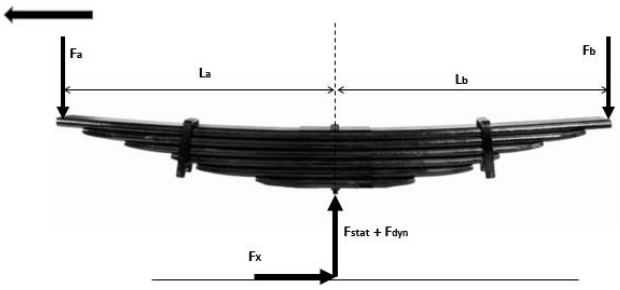



**Fig 1:** Forces acting on Leaf spring

Dynamic stress $\tau_{dynamic}$ occurs due to the road roughness and acting in the form of dynamic loads on the spring, which can be expresses as [2],

$$\tau_{z,dynamic} = \frac{F_{z,dyn}\tau_{stat}}{F_{stat}} \quad (4)$$

Similarly, the braking stress ( $\tau_{brake}$ ) can be evaluated through a relation;

$\tau_{brake} = \frac{F_X \tau_{stat}}{F_{stat}}$ , $F_X$, may be calculated from Eq. (1).

The total stress can be calculated from Eq (2).

## 3. Model Formulation

The model considered in this work is a 2-degrees of freedom (DOF) quarter car model. A 2-DOF quarter car model consist with two masses as shown in Fig. 2. The top mass $M_s$, represents the vehicle body whereas the bottom mass, $M_u$, represents the tire. The parallel spring and damper combinations placed in between the vehicle body and the tire ($k_s$ and $c_d$) represent the stiffness and damping of the suspension system. The tire stiffness is shown by the spring $k_t$. $x_1$, $x_2$ and $x_{in}$ are the vehicle displacement, wheel displacement and the road input to the quarter car model.
According to Newton's law, the governing equation of the system can be represented as:

$$M_s\ddot{x}_1 + k_s(x_1 - x_2) + c_d(\dot{x}_1 - \dot{x}_2) = 0 \quad (5)$$

$$M_u\ddot{x}_2 - k_s(x_1 - x_2) - c_d(\dot{x}_1 - \dot{x}_2) + k_t(x_2 - \quad (6)$$

The same can be represented in the matrix form as:

$$\begin{bmatrix} M_s & 0 \\ 0 & M_u \end{bmatrix}\begin{Bmatrix} \ddot{x}_1 \\ \ddot{x}_2 \end{Bmatrix} + \begin{bmatrix} c_d & -c_d \\ -c_d & c_d \end{bmatrix}\begin{Bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{Bmatrix} + \begin{bmatrix} k_s & -k_s & 0 \\ -k_s & k_s + k_t & -k_t \end{bmatrix}\begin{Bmatrix} x_1 \\ x_2 \\ x_{in} \end{Bmatrix} = 0 \quad (7)$$

A bond graph model of the quarter car vehicle suspension system is developed in SYMBOLS Sonata® software [7]. The model is shown in Fig. 3.





**Fig. 2:** 2-DOF quarter car model with controllable damper

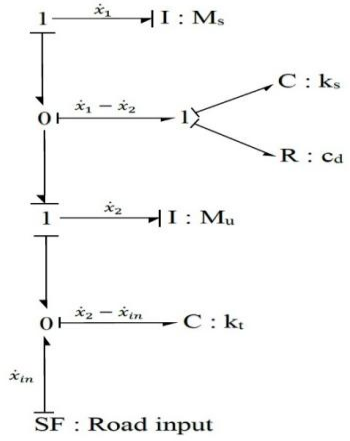



**Fig. 3:** BG model (Bond Graph) of 2-DOF quarter car suspension system

## 4. Numerical Simulation

Computer simulation can compress the performance of a system over years into a few minutes of computer running time. Simulation models are relatively flexible and can be modified to accommodate the changing environment to the real situation. At present, most of the simulation models are made by means of differential equations. In this research, quarter car suspension system are investigated at average speed of 60 kmph on four mentioned different road profile inputs using bond graphs technique and simulator of SYMBOLS-Sonata® and MATLAB/Simulink® software's are used.
The simulation of bond graph model is carried out for 10 sec to obtain different output responses. Total 1024 records are used in the simulation and error is kept in the order of $5.0 \times 10^{-4}$. Runge-Kutta Gill method of fifth order is used in present work to solve the differential equations generated through bond graph model. The parameters for the simulation of the 2-DOF quarter car model are shown in Table. The parameters used by Eryurek**,** [29] for a suspension model are used in this work.

### 4.1 Road Input

A random road profile is generated according to the International Organization for Standardization (ISO 8608). The ISO has suggested road roughness categorization using the power spectral density (PSD) values [8]. The artificial profile can be given as:

$$h(x) = \sum_{i=0}^{N} A_i \cos(2\pi.n_i.x + \varphi_i) = \sum_{i=0}^{N} \sqrt{2.\Delta n.G_d(i.\Delta n)} \cdot A_i \cos(2\pi.i.x.\Delta n + \varphi) \quad (8)$$

where $x$ is the abscissa variable from 0 to $L$; $\Delta n$ is $1/L$; $n_{max}$ is taken as $1/B$; $N$ is $\frac{n_{max}}{\Delta n}$ or $L/B$; where $L$ =250, $N$ =100; constant is denoted as $k$, depending from ISO road profile classification. In this work, four road conditions (H1-H4) are considered, which is shown in Figures.

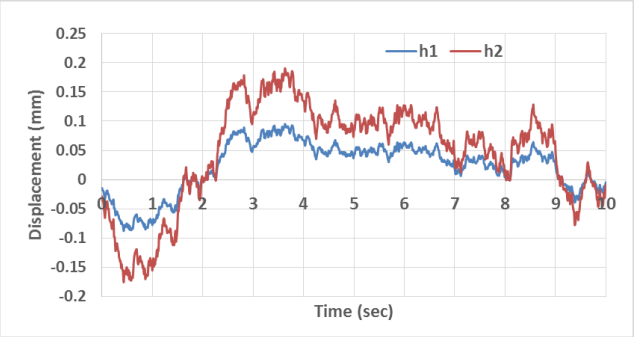



**Fig 4:** Road profiles at 60 kmph in four different road conditions as per ISO 8608

This road profiles are simulated for average speed of 60 kmph as shown in figure. It is evident form figure, H2 road condition is obtained maximum magnitude in an upward direction and minimum magnitude is identified at H1 road condition.

### 4.2 Simulation Results

The main objective of this work is to optimize all suitable parameters of leaf spring for heavy vehicle suspension system in order to improve the quality of the suspension can be enhanced and reduce the chances of failure. The simulation is carried out for two type road condition (h1 and h2) and the results are obtained in terms of total stress and spring deflection with respect to time.

## 5. Optimization

Present study used three significant parameters of suspension system. Entire parameter configuration is simulated for two types of road conditions with minimum count of simulation runs using Taguchi's modified L9 orthogonal array. Table 1 summarizes the parameters and their range used for simulation runs. And Table 2 is formed as $L_9$ orthogonal array (modified form) with seven columns and nine rows. Total degrees of freedom (DOF) is required to create a suitable orthogonal array and it must be higher than or equal to design parameters [9]. Therefore, total degrees of freedom for this study is 9. Total 9 parameter combinations are available whereas column of the orthogonal array assigned with each parameter of suspension. In this way, total 9 simulation runs are counted to investigate the whole parameter space by L9 improved orthogonal array.
A total of 18 simulation runs, two type of road conditions for every set of factors are simulated on a Matlab/Simulink/Symbols to determine their total stress and deflection. Table 3 & 4 summarized the spring deflection and total stress corresponding to each run for h1 and h2 road conditions respectively.

**Table 1:** Level of each of parameter

| S. No | Factor | Levels of each parameter | | |
|---|---|---|---|---|
| | | Level 1 | Level 2 | Level 3 |
| 1 | Thickness | 35 | 40 | 45 |
| 2 | No. of leaves | 6 | 7 | 8 |
| 3 | Width of spring | 75 | 80 | 85 |

**Table 2:** Taguchi $L_9$ modified orthogonal array

| Experiment No | Columns | | |
|---|---|---|---|
| | Factor 1 | Factor 2 | Factor 3 |
| 1 | 1 | 1 | 1 |
| 2 | 1 | 2 | 2 |
| 3 | 1 | 3 | 3 |
| 4 | 2 | 1 | 2 |
| 5 | 2 | 2 | 3 |
| 6 | 2 | 3 | 1 |
| 7 | 3 | 1 | 3 |
| 8 | 3 | 2 | 1 |
| 9 | 3 | 3 | 2 |

### 5.1 Analysis using Signal/Noise ratio

According to Taguchi method, Signal/Noise ratio is a deviation from the desired value and measure of quality characteristics. The 'signal' and noise shows the 'mean desirable value' and the 'undesirable value' (standard deviation from mean) respectively for the characteristic of output [10]. Further, signal/Noise ratio (μ) may be represented as

$$\mu = 10\log(M.S.D) \tag{9}$$

Whereas, stress is undesired phenomenon in leaf spring so it has to minimized and deflection of the leaf spring should also be minimized for good ride comfort. Thus, smaller the better value of Signal/Noise ratio is selected as a quality criterion in the analysis for reducing the total stress of the spring. This value can be obtained by:

$$M.S.D = \frac{1}{n}\sum_{i=1}^{n} S_i^2 \tag{10}$$

where, $n$ =the total number of the simulation runs in the orthogonal array and $Si$ is the total stress and deflection for the ith simulation run.
S/N ratio for each of the experiments is calculated and is presented in Table 3 and Table 4. The effect of a factor level is defined as the deviation it causes from the overall mean. The overall mean Signal/Noise ratio (β) of the runs is calculated by

$$\beta = \frac{1}{n}\sum_{i=1}^{n} \mu \tag{11}$$

where, $\beta$ is the mean Signal/Noise ratio of the ith experiment.
Every factor of all levels are similarly denoted in the 16 experiments. β can be presented as balanced overall mean for complete project. Since the simulation run array is orthogonal, it is viable to discretize the outcome of each aspect at every level. Output responses in the form of Signal/Noise ratio, total stress and deflection for each parameter at each level may be evaluated through mean Signal/Noise ratio, total stress and deflection of each of the experiment. Based on the Signal/Noise ratio analysis (Fig 5,6,7 and 8) and mean Signal/Noise ratio investigation, the optimum parameters for process to minimize total stress and deflection are obtained and presented in Table 5.

### 5.2 ANOVA (Analysis of Variance)

Analysis of variance is an extensively used statistical technique to interpret the simulation results. It is extensively used to identify the performance of group of parameters under investigation. The main purpose of this technique is to define the parameters, when combination of total variation is significant. Total sum of squares ($SQ_T$) can be calculated by [10].

**Table 3:** Signal/Noise ratio, total stress (MPa) and deflection for h1 road condition for each of the experiment

| Exp no | Bidth of spring (w,mm) | Thickness of Leaf (mm) | No.of full leaves | DEFLECTION (mm) | Total stress (σt) | S/n ratio for deflection | S/n ratio for total stress |
|---|---|---|---|---|---|---|---|
| 1 | 75 | 35 | 6 | 0.0087201 | 1124.77047 | 41.19 | -61.02 |
| 2 | 80 | 35 | 7 | 0.0071956 | 1082.81033 | 42.86 | -60.69 |
| 3 | 85 | 35 | 8 | 0.005185 | 891.726151 | 45.71 | -59.00 |
| 4 | 80 | 40 | 6 | 0.005741 | 967.197765 | 44.82 | -59.71 |
| 5 | 85 | 40 | 7 | 0.0036417 | 715.776053 | 48.77 | -57.10 |
| 6 | 75 | 40 | 8 | 0.0025906 | 581.917333 | 51.73 | -55.30 |
| 7 | 85 | 45 | 6 | 0.0025369 | 540.925335 | 51.91 | -54.66 |
| 8 | 75 | 45 | 7 | 0.0021124 | 525.470325 | 53.50 | -54.41 |
| 9 | 80 | 45 | 8 | 0.0016828 | 478.417995 | 55.48 | -53.60 |

**Table 4:** S/N ratio, total stress (Mpa) and deflection for h2 road condition for each of the experiment

| Exp no | Bidth of spring (w,mm) | Thickness of Leaf (mm) | No.of full leaves | DEFLECTION (mm) | Total stress (σt) | S/n ratio for deflection | S/n ratio for total stress |
|---|---|---|---|---|---|---|---|
| 1 | 75 | 35 | 6 | 0.011310287 | 1458.86071 | 38.93 | -63.28 |
| 2 | 80 | 35 | 7 | 0.007195573 | 1082.81033 | 42.86 | -60.69 |
| 3 | 85 | 35 | 8 | 0.005185045 | 891.726151 | 45.70 | -59.00 |
| 4 | 80 | 40 | 6 | 0.005741048 | 967.197765 | 44.82 | -59.71 |
| 5 | 85 | 40 | 7 | 0.003641718 | 715.776053 | 48.77 | -57.10 |
| 6 | 75 | 40 | 8 | 0.002875269 | 645.864293 | 50.83 | -56.20 |
| 7 | 85 | 45 | 6 | 0.002815712 | 600.367679 | 51.01 | -55.57 |
| 8 | 75 | 45 | 7 | 0.002344511 | 583.214317 | 52.60 | -55.32 |
| 9 | 80 | 45 | 8 | 0.001599519 | 454.733935 | 55.92 | -53.16 |

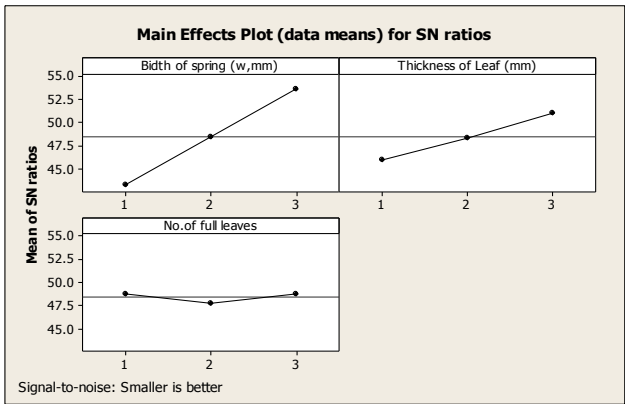



**Fig 5:** Signal/Noise ratio analysis of total stress of leaf spring at 60kmph in h1 road condition

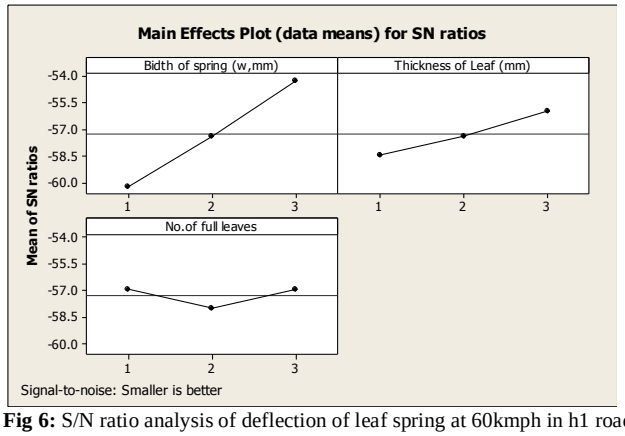



**Fig 6:** S/N ratio analysis of deflection of leaf spring at 60kmph in h1 road condition

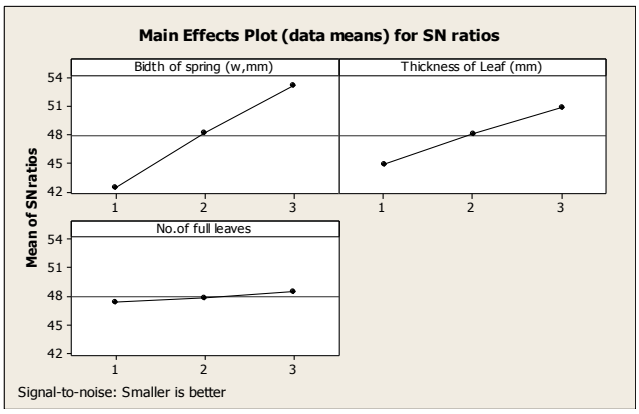



**Fig 7:** Signal/Noise ratio analysis of total stress of leaf spring at 60kmph in h2 road condition

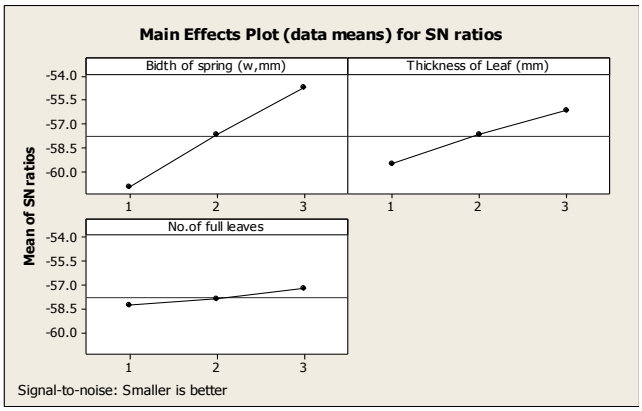



**Fig 8:** Signal/Noise ratio analysis of deflection of leaf spring at 60kmph in h2 road condition

**Table 5:** Optimum values of parameters for minimizing the total stress and spring deflection in both type road conditions

| S. No. | Parameter | H1-road condition | | H2-road condition | |
|---|---|---|---|---|---|
| | | Magnitude | Unit | Magnitude | Unit |
| 1 | Width of spring | 75 | mm | 75 | mm |
| 2 | Thickness | 35 | mm | 35 | mm |
| 3 | No. of leaves | 7 | --- | 6 | --- |

$$SQ_T = \sum_{i=1}^{n} (\mu - M)^2 \tag{12}$$

Where, M is the overall mean of Signal/Noise ratio.

$$SQr = SQe + \sum_{j=1}^{n_p} SQ_j \tag{13}$$

$$SQ_j = \sum_{i=1}^{l} (\mu_{ji} - M)^2 \tag{14}$$

In eq (14), $\mu_{ji}$ = number of important factors and

$l$= number of levels

$SQ_e$ = sum of squared error without or with pooled factor,

The process response majorly influenced by the factor then F-value is high. In the present work F-values obtained for the total stress and deflection. The F-value for h1 road condition is presented in Table (7 and 9) and for h2 road condition is presented in Table (11 and 13).

**Table 6:** Analysis of Variance for DEFLECTION (mm) at 60 kmph in h1 road condition

| Source | DF | Seq SS | Adj SS | Adj MS | F | P | Percentage contribution |
|---|---|---|---|---|---|---|---|
| Bidth of spring (w,mm) | 2 | 0.0000018 | 0.0000018 | 0.0000009 | 3.63 | 0.216 | 3.68852459 |
| Thickness of Leaf (mm) | 2 | 0.0000370 | 0.0000370 | 0.0000185 | 74.26 | 0.013 | 75.81967213 |
| No.of full leaves | 2 | 0.0000095 | 0.0000095 | 0.0000047 | 19.04 | 0.050 | 19.46721311 |
| Error | 2 | 0.0000005 | 0.0000005 | 0.0000002 | | | 1.024590164 |
| Total | 8 | 0.0000488 | | | | | |

**Table 7:** ANOVA table for regression model for deflection in h1 road condition

| Source | DF | SS | MS | F | P |
|---|---|---|---|---|---|
| Regres-sion | 3 | 0.000046533 | 0.000015511 | 33.83 | 0.001 |
| Residual Error | 5 | 0.000002292 | 0.000000458 | | |
| Total | 8 | 0.000048825 | | | |

**Table 8:** Analysis of Variance for total stress at 60 kmph in h1 road condition

| Source | DF | Seq SS | Adj SS | Adj MS | F | P | Percentage contribution |
|---|---|---|---|---|---|---|---|
| Bidth of spring (w,mm) | 2 | 26576 | 26576 | 13288 | 4.87 | 0.170 | 5.18 |
| Thickness of Leaf (mm) | 2 | 403468 | 403468 | 201734 | 74.00 | 0.013 | 78.65 |
| No.of full leaves | 2 | 77477 | 77477 | 38738 | 14.21 | 0.066 | 15.10 |
| Error | 2 | 5452 | 5452 | 2726 | | | 1.06 |
| Total | 8 | 512973 | | | | | |

**Table 9:** ANOVA table for regression model for total stress in h1 road condition

| Source | DF | SS | MS | F | P |
|---|---|---|---|---|---|
| Regression | 3 | 481165 | 160388 | 25.21 | 0.002 |
| Residual Error | 5 | 31808 | 6362 | | |
| Total | 8 | 512973 | | | |

S = 79.7591 R-Sq = 93.8% R-Sq(adj) = 90.1%

**Table 10:** Analysis of Variance for DEFLECTION (mm) at 60 kmph in h2 road condition

| Source | DF | Seq SS | Adj SS | Adj MS | F | P | Percentage contribution |
|---|---|---|---|---|---|---|---|
| Bidth of spring (w,mm) | 2 | 0.0000040 | 0.0000040 | 0.0000020 | 1.49 | 0.402 | 5.38 |
| Thickness of Leaf (mm) | 2 | 0.0000497 | 0.0000497 | 0.0000249 | 18.39 | 0.052 | 66.80 |
| No.of full leaves | 2 | 0.0000179 | 0.0000179 | 0.0000090 | 6.63 | 0.131 | 24.06 |
| Error | 2 | 0.0000027 | 0.0000027 | 0.0000014 | | | 3.63 |
| Total | 8 | 0.0000744 | | | | | |

**Table 11:** ANOVA table for regression model for deflection in h2 road condition

| Source | DF | SS | MS | F | P |
|---|---|---|---|---|---|
| Regression | 3 | 753692 | 251231 | 43.02 | 0.001 |
| Residual Error | 5 | 29197 | 5839 | | |
| Total | 8 | 782888 | | | |

S = 76.4153 R-Sq = 96.3% R-Sq(adj) = 94.0%

**Table 12:** Analysis of Variance for total stress at 60 kmph in h2 road condition

| Source | DF | Seq SS | Adj SS | Adj MS | F | P | Percentage contribution |
|---|---|---|---|---|---|---|---|
| Bidth of spring (w,mm) | 2 | 39129 | 39129 | 19564 | 2.55 | 0.282 | 5.00 |
| Thickness of Leaf (mm) | 2 | 546576 | 546576 | 273288 | 35.63 | 0.027 | 69.82 |
| No.of full leaves | 2 | 181844 | 181844 | 90922 | 11.86 | 0.078 | 23.23 |
| Error | 2 | 15338 | 15338 | 7669 | | | 1.96 |
| Total | 8 | 782888 | | | | | |

**Table 13:** ANOVA table for regression model for total stress in h2 road condition

| Source | DF | SS | MS | F | P |
|---|---|---|---|---|---|
| Regression | 3 | 753692 | 251231 | 43.02 | 0.001 |
| Residual Error | 5 | 29197 | 5839 | | |
| Total | 8 | 782888 | | | |

*S = 76.4153 R-Sq = 96.3% R-Sq(adj) = 94.0%*

### 5.3 Empirical Model Derivation

Empirical model for this study is derived through linear regression formulation. The obtained regression expressions is presented below.

**For h1 road condition**
The regression equation is

Deflection (mm) = 0.0384 - 0.000069 Bidth of spring (*w*,mm) - 0.000492 Thickness of Leaf (mm) - 0.00126 No.of full leaves
The regression equation is
Total stress ($\sigma t$) = 3858 - 2.79 Bidth of spring (w,mm)- 51.8 Thickness of Leaf (mm) - 113 No.of full leaves

**For h2 road condition**

The regression equation is
Total stress ($\sigma t$) = 5702 - 16.0 Bidth of spring (w,mm) - 59.8 Thickness of Leaf (mm) - 172 No.of full leaves

## 6. Conclusions

In the current work, correlation in the middle of the total stress and a most significant factors namely width, thickness, and no of leaves of the spring is investigated. The outcome of present study will support to recognize concerns by changing these factors in a ride comfort level of the driver and also road holding capability of wheels. The computational model of quarter car model was run for real parameters of leaf spring of truck and obtained 9 responses for different configuration of parameters. So that this study can be extended to implement a Taguchi methodology for obtaining an optimal setting parameters for quarter car suspension model.
Optimal suspension parameters for two different road conditions as per ISO 8608 obtained through Taguchi methodology is presented in Table 5.

## References

[1] T. Tak and S. Chung, "An optimal design software for vehicle suspension systems," in SAE Automotive Dynamics & Stability Conference, Troy, Mich, USA, May 2000, SAE Paper no: 2000-01-1618.

[2] D. Koulocheris, H. Vrazopoulos, and V. Dertimanis, "Optimisation algorithms for tuning suspension systems used in ground vehicles," in Proceedings of International Body Engineering Conference & Exhibition and Automotive & Transportation Technology Conference, Paris, France, July 2002, SAE Paper no:2002-01-2214.

[3] S. A. Mitchell, S. Smith, A. Damiano, J. Durgavich, and R. MacCracken, "Use of genetic algorithms with multiple metrics aimed at the optimization of automotive suspension systems," in Proceedings of Motorsports Engineering Conference and Exhibition, Dearborn, Mich, USA, November 2004, SAE Paper no: 2004-01-3520.

[4] M. Raghavan, "Suspension design for linear toe curves: a case study in mechanism synthesis," Journal of Mechanical Design, vol. 126, no. 2, pp. 278–282, 2004.

[5] A. Eskandari, O. Mirzadeh, and S. Azadi, " optimization of a McPherson suspension system using the design of experiments method," in SAE Automotive Dynamics, Stability & Controls Conference and Exhibition, Novi,Mich, USA, February 2000.

[6] Heisler H. Advanced vehicle technology. London: Hodder & Stoughton; 1989.
[7] Mukherjee A., Samantaray A.K. (2006). SYMBOLS- Shakti user's manual. High-tech consultants, STEP, Indian Institute of technology, Kharagpur, India.
[8] Agostinacchio, M., Ciampa D., Olita, S. (2014) .The vibrations induced by surface irregularities in road pavements – a Matlab® approach. European Transport Research Review, 6(3), 267–275.
[9] Raghunath, N. and Pandey, P.M., 2006. Improving accuracy through shrinkage modelling by using Taguchi method in selective laser sintering. International Journal of Machine Tools and Manufacture, 47, 985-995.
[10] Ross, P.J., 2005. Taguchi Techniques for Quality Engineering. New Delhi: Tata McGraw-Hill Publishing