International Journal of Engineering & Technology, 7 (3.24) (2018) 744-747

International Journal of Engineering & Technology

Website: www.sciencepubco.com/index.php/IJET

Research paper



Study the analysis of porous medium on performance of heat transfer flow

A.Sekkizhar[1], A.Selvaraj[2]

[1]Research Scholar Department of Mathematics, Vels Institute of Science, Technology and Advanced Studies, Chennai-600117.
[2] Department of Mathematics, Vels Institute of Science, Technology and Advanced Studies Chennai-600117.
**Corresponding author E-mail: aselvaraj_ind@yahoo.co.in:*

Abstract

In this paper think about the strength investigation of two dimensional normal flat constrained convective warmth exchange through permeable medium with info and yield is existed. A uniform temperature is applied in one side of the wall and other side of wall is separately. The brinkman and Darcy model used for flow in the porous medium. Parametric equations are analyzed and determine the effects heat transfer through porous channel. Reynolds number, Nusselt number and contact factor are set up for a model of permeable warmth exchange dependent on the present a specific technique.

Keywords: *porous medium, forced convection, heat transfer, horizontal layer, Darcy number*

1. Introduction

Fluid dynamics is the most important tool in the fields of applied sciences, engineering and technology, The solution of a fluid dynamic problem usually involves determine the several properties of fluids which are velocity, pressure, density and temperature as component of space and time. Navier and stokes gave the equation of motion of viscous fluids. Temperature moves one place to another with help of porous medium. Analyze the researcher and get the result the application of porous medium is very important role in the field of heat transfer is better than the preset method. Hunt et.al study and discussed the forced convection of fibrous medium and showed that high permeability porous material for temperature from one place to another place. Kuzay et.al study and analyzed heat transfer problems-using metal with wool field. Hwang et.al investigated experiments and numerical method using heat transfer problems. Vafai worked distinctive technique for permeable medium on one side of rectangular channel these investigations with help for us utilized for correct parameter strategy and geometric structure of permeable medium would be increment the rate warm exchange and lessening weight, on the other way a few investigations of physical properties of working liquids for warmth exchange issues. Finlayson et al.(1995, 1998) deliberated and discussed a 2-dimensional heat-transfer effects and admits students to model the thermal properties of building components such a hall, elevator, gate, vertialwall and basements, as good as products such as house hold uses. G.P.Ferraris and M.Tudanca they contemplated the issue of warmth transfer in half and half thin and thick film circuits have been researched both scientific and numerical ways.

Rafal Brociek.et.al concentrated to take care of direct issues and genuine subterranean insect state streamlining calculation to locate at least certain capacity. Saito et.al thought in ordinary method for warmth move in a permeable medium with two diverse sort of numerical vitality condition utilized. Finlayson considered the convective flimsiness of a segment ferrofluid warmed from base in the presence of a vertical uniform attractive field. The beginning of Brinkman ferroconvection utilizing a warm non-balance show has been examined by Ravisha et.al. Najundappa et.al have thought the net aftereffect of attractive zone subordinate thickness in Benard-Marangoni convection of ferromagnetic liquid. Rudraiah have examined the aftereffect of starting temperature on angles on Marangoni convection in Ferromagnetic fluid. Vaidyanathan et.al have considered the impact of attractive field subordinate consistency of ferroconvenction in a scantily dispersed permeable medium]. Bharti contemplated the impact of thermo solutal convection in ferromagnetic liquid. Kushal Sharma et.al have stud and worked the warm convection in an attractive liquid because of the impact of attractive field subordinate con

sistency. A direct and non-straight stability investigation of ferroconvection because of the attractive field dependent thickness soaking a permeable medium have been completed by numerous specialists. Penetrative convection in a level ferrofluid immersed permeable layer within the sight of uniform connected vertical attractive field has been examined by Nanjundappa et.al .They likewise explored the impact of attractive field subordinate consistency on the beginning of ferroconvection in the ferrofluid soaked even porous layer in which the jumping surfaces of permeable medium are viewed as either unbending ferromagnetic or tranquil with con-stant warm transition conditions. They found that expansion in permeable parameter, attractive field subordinate consistency diminishes by attractive number is to postpone the beginning of ferroconvection and keeping in mind that the non-

Copyright © 2018 Authors. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

straight of liquid polarization has no impact on the soundness of the framework.

Tswen-ChyuanJue contemplated the consolidated impact of warm and mag-netic convection on Ferrofluids, contained in a square cavity with two distinctive temperature dividers and it has been discovered that the stream increments with an expansion in attractive field and warmth making a trip starting with one source then onto the next abatements with an expansion in attractive region execution level. Mayboudi have examined ferrofluids in 2-dimensional system]. Divya talked about the aftereffect of flow on liquid warmed and soluted from base in the presence of permeable medium]. Hoeman and Gurgenai watched the impact of the temperature subordinate

2. Mathematical formulation

Thin layer of Ferrofluids contained between two inflexible limits and warmed from the beneath and proceeds with divider is accepted, framework result is close the divider are vanished in the presence technique and porosity is viewed as not alterable. The thermodynamics physical properties of issues of liquid and the permeable medium are accepted not alterable on the physical properties of strategy. Not alterable state, incompressible liquid state and 2-dimensional liquid stream in a framework loaded up with a closeness and enduring state porous framework, and adjusted administering condition can be composed as

The incompressible Boussinesq condition is

$$\nabla.\mathbf{q} = 0 \tag{1}$$

Changed Momentum condition is

$$\rho\left[\frac{\partial \mathbf{q}}{\partial \mathrm{t}} + (\mathbf{q}.\nabla)\mathbf{q}\right] = -\nabla \mathrm{p} + \mu\nabla^2\mathbf{q} \tag{2}$$

Integrating the equating (2) with respect to characterization volume and existence of boundaries and interact the boundaries with wall gives

$$\rho\left[\frac{\partial \mathbf{q}}{\partial \mathrm{t}} + \frac{1}{\varepsilon}(\mathbf{q}.\nabla)\mathbf{q}\right] = -\nabla \mathrm{p} + \mu\nabla^2\mathbf{q} + \frac{\mu \mathrm{q}}{\mathrm{k}}\varepsilon - \rho\frac{\mathrm{c}\varepsilon}{\sqrt{\mathrm{K}}}|\mathbf{q}|\mathbf{q} \tag{3}$$

Alterable state conditions, isolating by on either side of condition (3) progresses toward becoming to

$$\frac{\rho_f}{\varepsilon^2}\left(u\frac{\partial v}{\partial x} + v\frac{\partial v}{\partial y}\right) = -\frac{\partial p}{\partial y} - \frac{\mu}{k}v - \frac{c\,\rho}{\sqrt{k}}v\sqrt{u^2+v^2} + \frac{\mu}{\varepsilon}\left(\frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2}\right) + \frac{\rho}{\varepsilon^2}\left(u\frac{\partial v}{\partial x} + v\frac{\partial v}{\partial y}\right) \tag{4}$$

$$\frac{\rho}{\varepsilon^2}\left(u\frac{\partial u}{\partial x} + v\frac{\partial u}{\partial y}\right) = -\frac{\partial p}{\partial y} - \frac{\mu}{k}v - \frac{c\,\rho}{\sqrt{k}}v\sqrt{u^2+v^2} + \frac{\mu}{\varepsilon}\left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2}\right) + \frac{\rho}{\varepsilon^2}\left(u\frac{\partial u}{\partial x} + v\frac{\partial u}{\partial y}\right) \tag{5}$$

From the changed energy condition Darcy word, brinkman word and forchheimer word is resolved in regard with the per-meability K, and the dormancy coefficient C are figured with utilizing the beneath real connections

$$c = \frac{1.8}{\left(\sqrt{180\varepsilon}\right)\varepsilon} \tag{6}$$

$$k = \frac{\varepsilon^2 {D_p}^2}{180(1-\varepsilon)^2} \tag{7}$$

Since the thermodynamic equilibrium between fluid and solid phases in porous media, we have

$$T = T_s = T \tag{8}$$

$$K_e = \varepsilon K_f + (1-\varepsilon)K_s \tag{9}$$

K_e is the resultant warm conductivity

The limit condition for the especially considered as pursues with zero speed working request occasions on all the strong surface region with the speed q and temperature T of the liquid stream are equivalent request over the surface territory input. The non-dimensional normal weight distinction between the information and out way space is evaluated as far as the Darcy grinding factor is accepted that

$$F_f = \left(-\frac{\nabla p}{l}\right)\frac{D}{2\rho u^2} \tag{10}$$

Heated boundary Nessult number is defined as

$$N_u = \frac{q^n x D_h}{K\,(T_w - T_0)} \tag{11}$$

From the equations (1)-(5) with the help of boundary conditions was to find answer to the numerically used by a control volume strategy. The created force condition for speed, weight, vitality, energy, and temperature and heat transfer rate from one place to another was calculated depends on the verified velocity effect.

3. Result and discussion

Break down the aggregate yield of segment distance across on warmth exchange and weight part width is considered. It is seen from the figures 1 and figure 2 isn't same in the specific little component molecule Darcy width (Da),the normal length Nusselt number(Nu) , and the weight point tumble down precisely with

expanding (Dp) for a more molecule segment distance across, the Nusselt number and weight point are both decline gradually as their development to similitude approach esteems for non-permeable medium. At a high pres-beyond any doubt time the heart exchange rate would be documented. Despite the fact that both the Nusselt number and weight point increment as the component molecule measurement diminished and the expanding rate of both dad rameter are extraordinary. It is seen from the figure 3 the impact of Reynolds number and segment molecule breadth on the warmth exchange capacity parameter examined, when the molecule width diminish or the Reynolds number increment, despite the fact that the warmth exchange capacity increments.

Contrasting the impact of the Reynolds number and the molecule diameter on warmth move have broke down in graphically. This molecule dad rameter can be composed as

$$\varepsilon_p = \frac{Nu \times pr^{\frac{1}{3}}}{F_{f\,\mathrm{Re}}}$$

From the outcome if the Nusselt number aggregated and furthermore the permeable medium with a littler molecule distance across creates a superior increment in warmth exchange improving than on with a major molecule width. But since the Reynolds number range ends up littler, approach relate degree asymptotic worth that is particularly about the molecule diameter in light of the fact that the Nusselt number range is aggregated. With the scope of study, an analogus parameter is utilized to compel measure the execution of the permeable direct warmth exchange. In figure.3 Reynolds number and specific distance across on the warmth exchanger parameter are outlined as the molecule breadth diminish or as Reynolds number increment in spite of the fact that the warmth exchanges upgrade increment. The execution parameter diminishes since the expanding the rate of non-dimensional weight drop is significantly higher than that of the Nusselt number

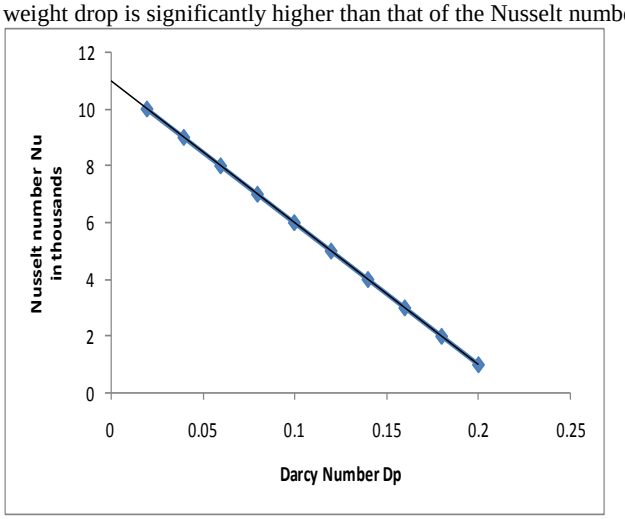


Figure1 – Effect of molecule distance across on the dimensional weight in the permeable channel

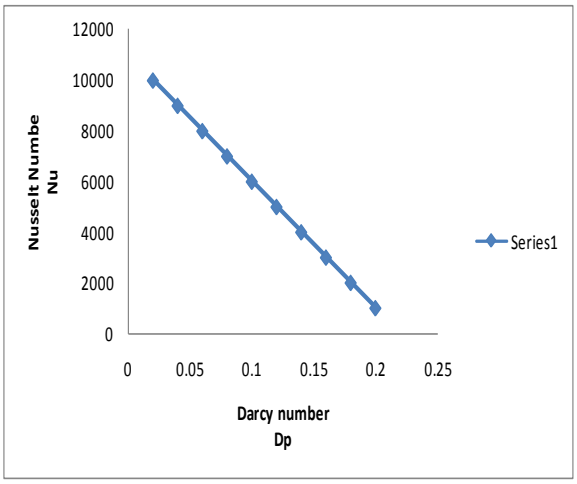


Figure 2- Figure 2-Effect of molecule width on the Nusselt number in the permeable channel

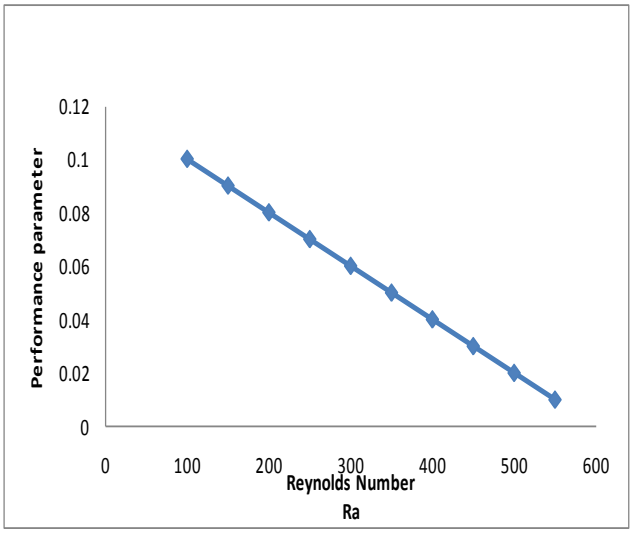


Figure 3-Effect of Reynolds number and molecule distance across on performance parameter

4. Conclusion

A numerical deliberation of laminar stream constrained convection in a 2-dimensional permeable medium with information and out way part was conducted a little molecule distance across can be connected to chronicle higher warmth exchange enhancement, yet a bigger molecule breadth prompts a more proficient accomplishment dependent on warmth exchange upgrade

Acknoeledgment

I sincere thanks to Dr.A.Selvaraj, professor, Department of Mathematics, Vels Institute of science, technology and advanced studies, Chennai-117.

References

[1] Ferraris G.P and Tudanca M, "The solution of two dimensional heat conduction problems for predicting operating temperature and power handling capabilities of hybrid circuits,"electrocomponent science and technology,vol.7,1980,pp.97-105.
[2] Finlayson B A, *Journal of fluid Mechanics* ,vol.40 (1970) 753
[3] Hunt M.L and Tien C.L, "Effect of thermal dispersion on forced convection in fibrous media," International journal f heat andmass ansfer,vol.31(2),1988,pp.301-309.
[4] HwangG.J and Chao C.H, Heat transfer measurement and analysis for sintered porous channels," journal of heat transfer, ASME transactions, vol.116 (2), 1994, pp.456-464.

[5] Kuzay T.M , Collins J.T and Khounsary A.M, "enhanced heat transfer with metal wood field tubes," proceedings of ASME/JSEM thermal conference,1991,pp.451-459.
[6] Kushal Sharma, Paras Ram and Anupam Bhandari, *Appl Mathematics &Computation*,143(1)(2005)1187
[7] Leong K.C,Li H.Y,Jin W and Chai J.C ,"numerical and experimental study of forced convection in graphite foams,"
[8] thermal engineering,vol.30(5), 2010, pp.520-532
[9] Nanjundappa C.E, Sivakunar I. S and Arunkumar R , *Indian J Pure &Applied physicss*, 30 (2002) 256.
[10] Rafal Brociek, Damian Slota,Mariusz Krol, Grzegorz Matula," modeling of heat distribution in porous aluminum using fractional differential equation", fractal fract ,vol.1,2017,pp.1-17.
[11] Ravisha M ,Sivakumara I. S and Gangadhara Reddy , *Int Comm in Heat & Mass Trnasfer* , 11 (2011) 208.
[12] Saito M.B and De Lemos M.J.S, "laminar heat transfer in a porous channel simulated with a two-energy equation model," international communications in heat and mass transfer, vol.36(10),2009,pp.1002-1007.
[13] Sozen M and Vafai k, Longitudinal heat dispersion in a porous bed," AIAA journal f heat transfer, vol.1(2),pp.153-157.
[14] Vafai K,analysis of forced convection enhancement in a channel using porous block," AIAA journal of thermophysics and heat transfer,vl.8,pp.563-573.
[15] Vaidyanathan G ,Sekar R and HemalathaR, *Indian J Pure &ApplPhys*, vol. 46(2008) 477.