

# Batch Kinetics of Nutrients Removal from Synthetic Meat Processing Wastewater by using Microalgae *Botryococcus* Sp.

Vikneswara A. Shanmugan<sup>1\*</sup>, Radin M.S.R. Mohammed<sup>2</sup>, Amir H.B.M. Kassim<sup>2</sup>,  
Adel A.S. Al-Gheethi, Nur A.A. Latiffi<sup>3</sup>

<sup>1,2,3</sup>Micro-pollution Research Centre (MPRC), Department of Water and Environmental Engineering, Faculty of Civil & Environmental Engineering, Universiti Tun Hussein Onn Malaysia, 86400 Parit Raja, Batu Pahat, Johor, Malaysia

\* Corresponding author E-mail: vikneswara.abirama21@gmail.com

## Abstract

Disposed meat processing wastewater contains high range of nutrients such as ammonia nitrogen and orthophosphate which will cause eutrophication and lead to destruction of ecosystem. Therefore, batch experiments were conducted to explore the influence of the range of initial concentration of ammonia nitrogen and orthophosphate found in meat processing wastewater in the removal of those nutrients during phycoremediation of synthetic wastewater by using microalgae *Botryococcus* sp. Michaelis-Menten rate expression was applied to generate biokinetic coefficients  $k$ , reaction rate constant,  $K_m$ , half saturation constant and  $Y$ , yield coefficients. The experiment was conducted using synthetic wastewater with initial  $\text{NH}_4\text{-N}$  concentration varying between 30-480 mg/l and  $\text{PO}_4^{3-}$  concentrations varying between 14-239 mg/l. The results demonstrate removal efficiency of  $\text{NH}_4\text{-N}$  between 42-100 % and  $\text{PO}_4^{3-}$  between 63-96 %. Biokinetic coefficients were established as  $k = 1.72 \text{ mg NH}_4\text{-N / mg chl } a/\text{day}$ ,  $K_m = 52.29 \text{ mg/L}$  and  $Y_N = 0.027 \text{ mg chl } a/\text{mg NH}_4\text{-N}$  for ammonia nitrogen and  $k = 1.13 \text{ mg PO}_4^{3-}/\text{mg chl } a/\text{day}$ ,  $K_m = 44.45 \text{ mg/L}$  and  $Y_P = 0.038 \text{ mg chl } a/\text{mg PO}_4^{3-}$  for orthophosphate.

**Keywords:** batch kinetics; microalgae; nutrients; phycoremediation; synthetic meat processing wastewater.

## 1. Introduction

The water and wastewater treatment has become more vital due to the escalating world population growth which causes poor wastewater disposal (Feng et al., 2009). As the result of population and climate change freshwater resources has been rapidly decreasing. Besides, the accelerating stringency in the international effluent discharge standards is requiring development in wastewater treatment technologies and demands new inventions in wastewater treatment field (US EPA, 2004; World Bank Group, 2007).

The nutrient content in meat factory wastewater by Cristian, 2010 were total nitrogen, 2743.6 mg/L and total phosphorous, 328.4 mg/L with the N:P ratio of 8:1. While, the nutrient content in meat processing wastewater by Lecompte et al., 2015 were TN, ranges from 60-339 mg/L and  $\text{PO}_4^{3-}$  ranges from 30.1-77.3 mg/L.  $\text{NH}_4\text{-N}$  and TP content from provincially inspected slaughterhouse wastewater in Ontario, Canada were 63.66 mg/L and 48.4 mg/L respectively in a study by Wu et al., 2012. General characteristic of wastewater from meat related activities (Lecompte et al., 2015) reveals that TN and  $\text{PO}_4^{3-}$  ranges from 50-841 mg/L and 25-200 mg/L respectively. As the concentration of nutrients in meat processing wastewater varies, the effect of the initial concentration of nutrients on removal efficiency of nutrients has to be crucially investigated to give objective scientific support to the use of microalgae in the wastewater treatment for wastewater from meat processing food industry.

Objective of this study is to evaluate the effects of initial nutrient concentration on nutrients removal efficiency through removal mechanism of biokinetic coefficients  $k$ , reaction rate constant,

$K_m$ , half saturation constant and  $Y$ , yield coefficients by using Michaelis-Menten rate expression.

## 2. Materials and methods

Wastewater sample was collected at one of small meat processing industry located in Batu Pahat, Johor. The samples were taken at 9.00 a.m. and 12.00 p.m. through grab sampling method. These time were selected based on the research done by wastewater (Latiffi et al., 2016) for the highest pollutant discharge for meat processing wastewater. The wastewater samples were tested for  $\text{NH}_4\text{-N}$  and  $\text{PO}_4^{3-}$  concentration content using BUCHI Distillation Unit K-355 and Ion Chromatography apparatus (Dionex ASE 200). Range of the nutrient concentrations identified.

**Table 1:** Range of Nutrients Concentration in Meat Processing Wastewater

Nutrients	Unit	Samples taken at 9.00 a.m.	Samples taken at 12.00 p.m.
Ammonia Nitrogen ( $\text{NH}_4\text{-N}$ )	mg/L	99 ± 3.3 -	35 ± 2.8 -
		492 ± 17.1	389 ± 8.5
Orthophosphate ( $\text{PO}_4^{3-}$ )	mg/L	39.54 ± 2.1-	14.99 ± 3.4-
		236.54 ± 7.8	95.68 ± 6.2

Microalgae sampling, isolation and identification are done prior inoculation process. These microalgae were found and obtained from Endau Rompin National Park, Johor. Sample of isolated algae culture was examined under a light microscope for initial identification and confirmation that the culture is unialgal was done by using a NIKON Eclipse E600 microscope with an at-

tached camera DXM 1200F. Selected microalgae were cultivated in Bold's Basal Medium, BBM (Nichols and Bold, 1965) and place under natural conditions for growth.

Synthetic wastewater was prepared by using ultrapure water mixed with NH<sub>4</sub>Cl and KH<sub>2</sub>PO<sub>4</sub> as ammonia nitrogen and orthophosphate sources, respectively. 11 sets 800 ml mixture of ultrapure water with 10 sets of different initial concentrations of ammonia nitrogen and orthophosphate which are 14 and 30; 39 and 80; 64 and 130; 89 and 180; 114 and 230; 139 and 280; 164 and 330; 189 and 380; 214 and 430; and 239 and 480 mg/L respectively and one set with no initial concentrations of ammonia and orthophosphate used as control. The initial Chl *a* content controlled within the range of 2.5mg/L to 6.7 mg/L. pH is controlled at around 6 to 8 pH, N:P ratio is maintained at 2:1 and the microalgae cell concentration used is 1x10<sup>6</sup> cell concentration. Other factors like light intensity, photoperiod, and temperature are left natural. Variations of nutrient concentrations and Chl *a* content were monitored daily for 18 days and the utilization rates of specific substrate were computed.

NH<sub>4</sub>-N and PO<sub>4</sub><sup>3-</sup> concentration contents were established using BUCHI Distillation Unit K-355 using Method 4500 NH<sub>3</sub> and Ion Chromatography apparatus (Dionex ASE 200) using Method 4110B respectively. To determine the Chl *a* content, 10 ml of algal suspension is centrifuged at 3000rpm for half an hour and the supernatant was disposed. The algae were mixed with 3ml of methanol and the suspension heated in a water bath for 5 minutes. The samples were left to be chilled to room temperature. Then, methanol is added to increase the volume to 5ml. A spectrophotometer is used to determine the Chl *a* concentration in the pigment extract.

### 3. Results and discussion

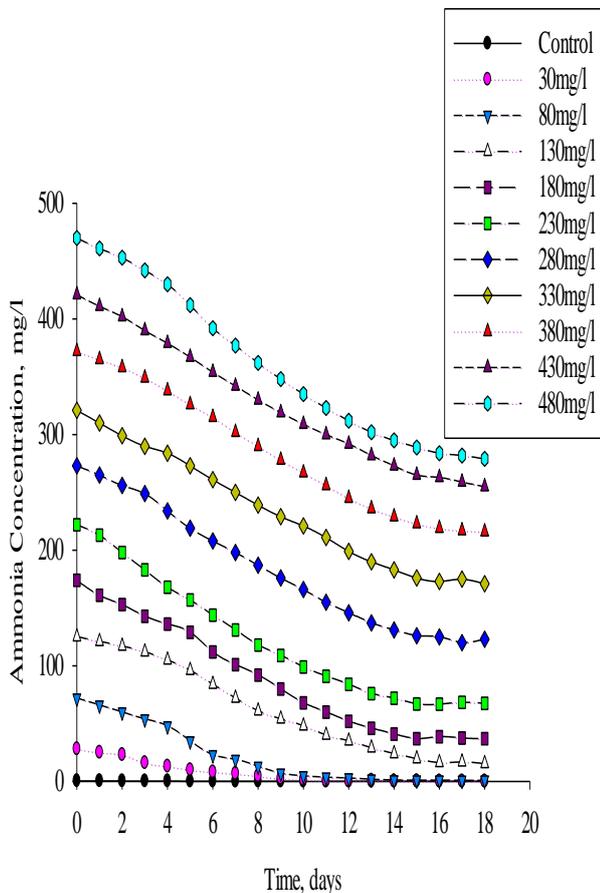


Fig. 1: Differences in NH<sub>4</sub>-N Concentrations in the Medium versus Time throughout Batch Cultivation under Multiple Initial NH<sub>4</sub>-N Concentrations

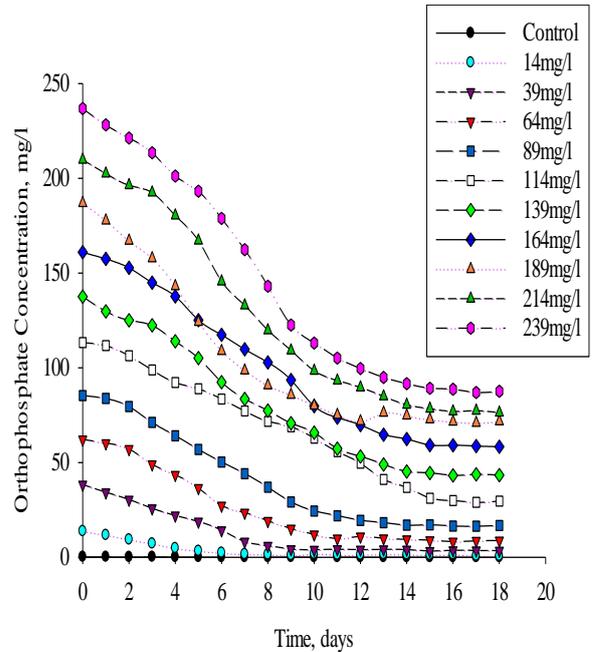


Fig. 2: Differences in PO<sub>4</sub><sup>3-</sup> Concentrations in the Medium versus Time throughout Batch Cultivation under Multiple Initial PO<sub>4</sub><sup>3-</sup> Concentrations

Fig. 1 portrays the elimination of NH<sub>4</sub>-N concentration against time with multiple initial NH<sub>4</sub>-N concentration for the period of 18 days of batch experiment. In the media with lowest initial concentration which is 30 mg/L, NH<sub>4</sub>-N was entirely eliminated and 99 % removed from the second lowest initial concentration, 80 mg/L. In spite of that, the NH<sub>4</sub>-N removal efficiency further decreases from 88 % to 42 % as the initial concentrations increases from 130 mg/L to 480 mg/L. Fig. 2 illustrates the removal of PO<sub>4</sub><sup>3-</sup> concentration with time at different initial PO<sub>4</sub><sup>3-</sup> concentration. The highest PO<sub>4</sub><sup>3-</sup> removal is 96 % from the medium with the lowest initial concentration 14 mg/L and the second highest is 91 % from the second lowest initial concentration, 39 mg/L. Despite that, the PO<sub>4</sub><sup>3-</sup> removal efficiency further decreases from 86 % to 63 % as the initial concentrations increases from 64 mg/L to 239 mg/L.

Removal efficiency of NH<sub>4</sub>-N and PO<sub>4</sub><sup>3-</sup> in this study is consistent and comparatively better than the study by Aslan *et al.* (2006) where the highest of 100% and lowest of lesser than 24% of NH<sub>4</sub>-N removal efficiency and highest of 78% and lowest of less than 30% removal efficiency of PO<sub>4</sub>-P from synthetic wastewater with 10 different initial concentrations of NH<sub>4</sub>-N and PO<sub>4</sub>-P using microalgae *Chlorella Vulgaris* (Aslan *et al.*, 2006). In the study of microalgae *Botryococcus* sp. ability to reduce nutrient concentrations in livestock wastewater, achieved TN removal efficiency rate of 88% and TP removal efficiency rate of 98% (Shen *et al.*, 2008). The removal efficiency of nitrate is 99.7-99.8 % and of phosphate is 98.8- 99.1% by using *Botryococcus* sp. on industrial wastewater (Chinnasamy *et al.*, 2010). In the study by Rinna *et al.*, 2014, two strains of *Botryococcus braunii* (*UTEX LB 572* and *LABIOMAR/IB/UFBA IBL C115*) were used and the TN removal percentage at the effluent were 62 % and 65% respectively and TP removal percentage at the effluent for both strains are 100%. Ri, is the initial rates of substrate removal, are applied to establish the coefficients. Rate of initial substrate removal is computed using (1).

$$R_i = -(S_i - S_t) / (t_i - t_t) \tag{1}$$

Where, R<sub>i</sub> is the substrate removal rate, S<sub>i</sub> represents the initial concentrations of the substrate which is NH<sub>4</sub>-N or PO<sub>4</sub><sup>3-</sup>, S<sub>t</sub> represents the substrate concentration tally with “t” which represents the time when there is no notable change in substrate concentration.

By dividing  $R_i$  to the initial chl  $a$  content (2), specific rate of substrate removal ( $R_{xi}$ ) is established.

$$R_{xi} = R_{Si} / X_i = kS_i / K_m + S_i \quad (2)$$

Equation 2 can be linearized in double reciprocal form as in Equation 3 and a plot of  $1/R_{xi}$  against  $1/S_i$  generates a linear line producing a slope of  $K_m/k$  and y-axis intercept of  $1/k$ .

$$1 / R_{xi} = (1 / k) + [(K_m/k) \times (1/S_i)] \quad (3)$$

From the experimental data regression lines were plotted in form of  $1/R_{xi}$  versus  $1/(NH_4-N)_0$  and  $1/R_{xi}$  against  $1/(PO_4^{3-})_0$  for removal of respective substrates. Kinetic coefficients of ammonia nitrogen removal and orthophosphate removal by *Botryococcus sp.* as  $k$  and  $K_m$  were computed from the slope and intercept of this plot's best fit line.

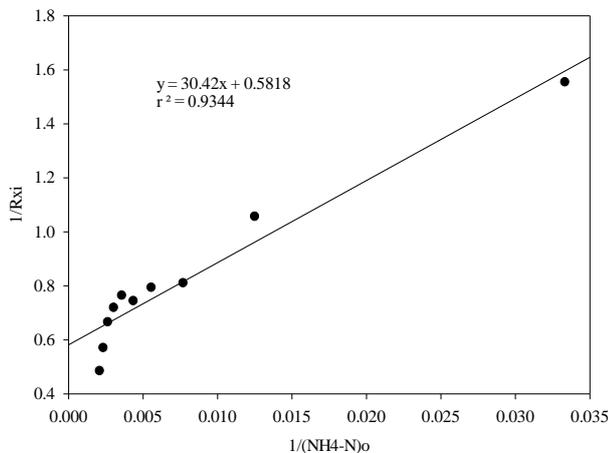


Fig. 3: Kinetic coefficients,  $K_m$  and  $k$ , for  $NH_4-N$  removal established.

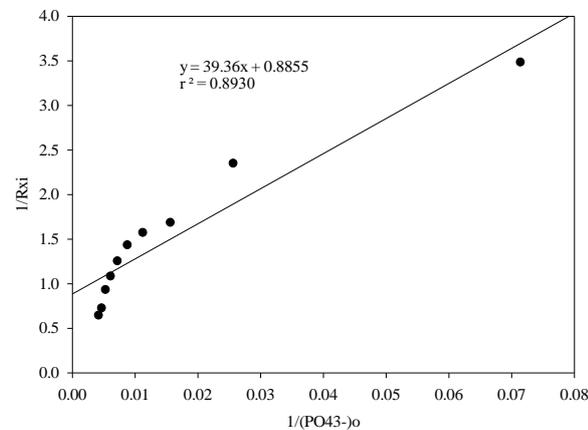


Fig. 4: Kinetic coefficients,  $K_m$  and  $k$ , for  $PO_4^{3-}$  removal established.

From the experimental data yielded by Fig. 3 and 4 were plotted in form of  $1/R_{xi}$  versus  $1/(NH_4-N)_0$  and  $1/R_{xi}$  versus  $1/(PO_4^{3-})_0$  as depicted in Fig. 5 and 6. Slope and intercept of best fit line of this plot generates kinetic coefficients of ammonia nitrogen elimination by *Botryococcus sp.* were established as  $k = 1.72$  mg  $NH_4-N$ /mg chl  $a$ /day and  $K_m = 52.29$  mg/L. The correlation for inverse specific  $NH_4-N$  removal rate and inverse initial  $NH_4-N$  concentration from the regression line is  $R^2=0.98$  which means a strong positive linear relationship. Similarly, the coefficients for  $PO_4^{3-}$  elimination by *Botryococcus sp.* were generated as  $k = 1.13$  mg  $PO_4^{3-}$ /mg chl  $a$ /day and  $K_m = 44.45$  mg/L according to the intercept and the slope of best fit line of  $1/R_{xi}$  versus  $1/(PO_4^{3-})_0$ . The correlation for inverse specific  $PO_4^{3-}$  removal rate and inverse initial  $PO_4^{3-}$  concentration from the regression line is  $R^2=0.93$  which means a perfect positive linear relationship.

The biokinetic coefficient values reveal that ammonia nitrogen removal rate is higher than that of orthophosphate during the phycoremediation. The reaction rate constant,  $k$  and half saturated constant,  $K_m$  values for both  $NH_4-N$  and  $PO_4^{3-}$  removal are in agreement with study by Aslan *et al.* (2006), where  $k = 1.5$  mg  $NH_4-N$ /mg chl  $a$ /day and  $K_m = 31.5$  mg/L and  $k = 0.5$  mg  $PO_4^{3-}$ /mg chl  $a$ /day and  $K_m = 10.5$  mg/L.

Equations 4 and 5 were used to generate yield coefficient for  $NH_4-N$  and  $PO_4^{3-}$  removal, respectively

$$(chl\ a)_f - (chl\ a)_i = Y_N[(NH_4-N)_0 - (NH_4-N)_f] \quad (4)$$

Or

$$(chl\ a)_f - (chl\ a)_i = Y_P[(PO_4^{3-})_0 - (PO_4^{3-})_f] \quad (5)$$

Where, the final chl  $a$  concentration (mg/L) and initial chl  $a$  concentration (mg/L) at the beginning of the experiments is represented by  $(chl\ a)_f$  and  $(chl\ a)_i$  respectively.  $(NH_4-N)_0$  represents the initial  $NH_4-N$  concentration (mg/L) and  $(NH_4-N)_f$  represents final  $NH_4-N$  concentration (mg/L). Yield coefficient for  $NH_4-N$ ,  $Y_N$  (mg chl  $a$ /mg  $NH_4-N$ ) is established by slope of  $((chl\ a)_f - (chl\ a)_i)$  against  $((NH_4-N)_0 - (NH_4-N)_f)$ . In the same way yield coefficient for  $PO_4^{3-}$ ,  $Y_P$  is calculated.

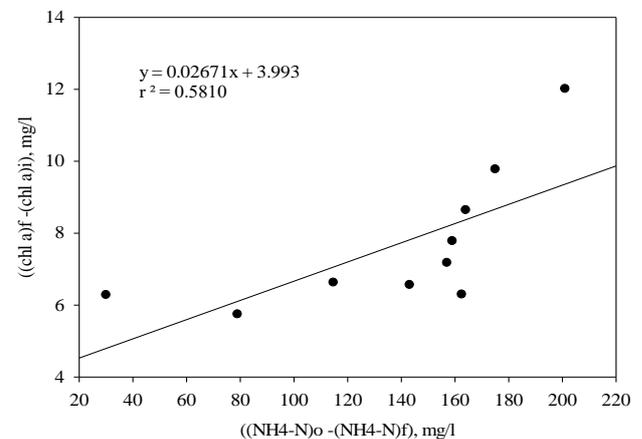


Fig. 5: Yield coefficient for ammonia nitrogen ( $NH_4-N$ ) removal by *Botryococcus sp.* established

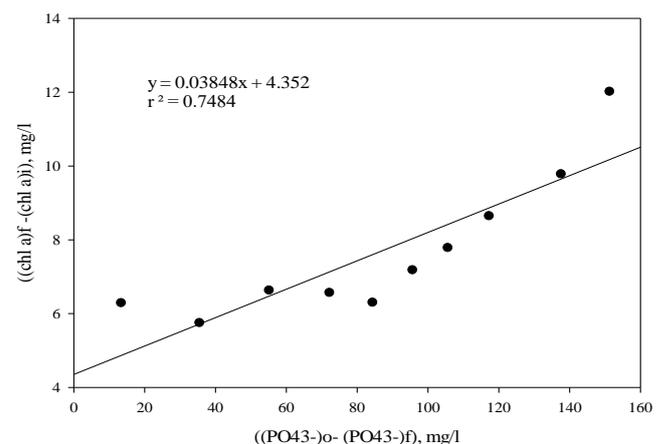


Fig. 6: Yield coefficient for orthophosphate ( $PO_4^{3-}$ ) removal by *Botryococcus sp.* established

From Fig. 5 it was determined that yield coefficient for  $NH_4-N$  removal,  $Y_N = 0.027$  mg chl  $a$ /mg  $NH_4-N$ . The correlation for difference between final and initial chl  $a$   $((chl\ a)_f - (chl\ a)_i)$  and difference between final and initial ammonia nitrogen  $((NH_4-N)_0 - (NH_4-N)_f)$  concentration from the regression line is  $R^2=0.58$  which means a positive linear relationship. The same method used to determine yield coefficient for  $PO_4^{3-}$  removal from Fig. 6 re-

sulted in  $Y_P = 0.038$  mg chl *a*/mg  $PO_4^{3-}$ . These yield coefficient values are in accordant with study by Aslan *et al.* (2006), where yield coefficient for  $NH_4-N$  was  $Y_N = 0.15$ mg chl *a*/mg  $NH_4-N$  and  $Y_P = 0.14$ mg chl *a*/mg  $PO_4-P$  for phosphorus.

#### 4. Conclusion

The high reaction rate constant,  $k$  and half saturated constant,  $K_m$  values reveal that complying to the conditions of this research with excessive nutrient concentrations, competitiveness of *Botryococcus sp.* is lower as the existence of sufficient nutrients. Hence, these values indicate that *Botryococcus sp.* can effectively uptake nutrients at high concentrations. And this evinces that *Botryococcus sp.* can be used for phycoremediation at larger scale. The result reveals that  $Y_P$  is higher than  $Y_N$ . Therefore, this result signifies that orthophosphate produce more chl *a* from *Botryococcus sp.* compared to ammonia nitrogen during phycoremediation process in this study.

#### References

- [1] Aslan S & Kapdan IK (2006), Batch kinetics of nitrogen and phosphorus removal from synthetic wastewater by algae. *Ecological Engineering*, 28(1), pp: 64–70.
- [2] Bustillo-Lecompte, CF, Knight M, Mehrvar M (2015), Assessing the performance of UV/H<sub>2</sub>O<sub>2</sub> as a pretreatment process in TOC removal of an actual petroleum refinery wastewater and its inhibitory effects on activated sludge. *Can. J. Chem. Eng.* 93 (5), pp: 798–807.
- [3] Chinnasamy S, Bhatnagar A, Hunt RW, Das KC (2010), Microalgae cultivation in a wastewater dominated by carpet mill effluents for biofuel applications. *Bioresour. Technol.* 101, pp: 3097–3105.
- [4] Fauci AS, Braunwald E, Kasper DL & Hauser SL (2008), Principles of Harrison's Internal Medicine, Vol. 9, 17th edn. *McGraw-Hill*, New York, NY, pp.2275–2304.
- [5] Feng H, Hu L, Mahmood Q, Fang, C, Qiu C, Shen D (2009), Effects of temperature and feed strength on a carrier anaerobic baffled reactor treating dilute wastewater. *Desalination* 238 (1-3), 111-121.
- [6] Latiffi, N. A. A., Mohamed, R. M. S. R., Shanmugan, V. A., Pahazri, N. F., Kassim, A. H. M., Matias-Peralta, H. M., & Tajuddin, R. M. (2016). Removal of nutrients from meat food processing industry wastewater by using microalgae botryococcus SP. *ARPAN Journal of Engineering and Applied Sciences*, 11(16), 9863-9867.
- [7] Rinna F, Barone CMA (2014), Microalgae biomass production in different growth condition FedOA Università degli Studi di Napoli "Federico II", pp: 1-79.
- [8] Shen Y, Yuan W, Pei Z, Mao E (2008). Culture of microalga *Botryococcus* in livestock wastewater. *American Society of Agricultural and Biological Engineers*, pp: 1395-1400.
- [9] US EPA, (2004), Effluent limitations guidelines and new source performance standards for the meat and poultry products point source category. U. S. Environ. Prot. Agency (US EPA) Fed. Regist. 69 (173).
- [10] World Bank Group (2007), Environmental, Health and Safety (EHS) Guidelines for Meat Processing. General EHS Guidelines: Environmental Wastewater and Ambient Water Quality (accessed 10.03.15.)