International Journal of Engineering &Technology, 13 (2) (2024) 336-340

International Journal of Engineering & Technology

Website: www.sciencepubco.com/index.php/IJET

Research paper



Novel system design model for an IoT-based real-time oil and gas pipeline leakage monitoring system

Samuel O. Effiom [1] *, Gertrude A. Fischer [2], Eko J. Akpama [3]

[1] Department of Mechanical Engineering, University of Cross River State, Nigeria
[2] Department of Electrical/Electronics Engineering, University of Cross River State, Nigeria
**Corresponding author E-mail: samueloliver@unicross.edu.ng*

Abstract

Real-time monitoring of oil and gas pipelines is critical for mitigating the environmental risks posed by leakages. This study presents a novel design model of a real-time Internet of Things (IoT)-based pipeline leakage monitoring system that demonstrates superior detection accuracy, reduced false positives, and operational scalability. The system utilizes pressure and temperature sensors strategically placed along the pipeline to detect anomalies indicative of leakages. By leveraging a hybrid cloud architecture, smart sensors, and machine learning for anomaly detection, the system processes pipeline data in real-time. This data is transmitted in real-time to a central server for analysis, allowing for rapid response to potential hazards. The novelty of this system lies in its hybrid cloud-architecture and the integration of advanced anomaly detection algorithms, which improve accuracy and reduce false alarms. Data from a simulated pipeline setup is analyzed to assess the system's performance, showing a detection accuracy of 94% for simulated leakages. The implications of this study contribute to the knowledge of sustainable operations in the oil and gas sector and provide a scalable framework for future developments.

Keywords: *Oil And Gas; Pipeline; IoT; Real-Time Monitoring; Cloud-Architecture.*

1. Introduction

Leakages in oil and gas pipelines have far-reaching consequences for environmental sustainability and economic stability [1]. Traditional leakage detection methods rely on periodic inspections, which can fail to detect leaks in time, leading to significant environmental damage [2]. IoT technologies provide real-time monitoring capabilities that can reduce the risks associated with undetected leaks [3-4]. The use of IoT for pipeline monitoring has evolved significantly over the last decade. Early reviewed studies by [5] focused on simple pressure sensor networks with limited communication capabilities. These systems lacked the robustness needed for large-scale pipeline networks and were prone to false alarms due to environmental noise. [6] improved upon these designs by introducing temperature sensors, which provided additional data for detecting anomalies. However, sensor placement remained a challenge, with many systems failing to cover the entirety of the pipeline effectively. More recent work by [7] introduced machine learning algorithms to classify pipeline conditions based on historical data. While these systems showed promise, their reliance on centralized processing led to latency issues, especially in remote areas. [8] developed a hybrid cloud-based architecture that reduced latency but faced scalability challenges as the number of sensors increased. Another study by [9] emphasizes the effectiveness of pressure sensors but highlights the limitations in remote data transmission due to network constraints. Other existing literatures as found in reviewed studies of [10] and [11] introduced temperature monitoring, but their systems lacked real-time cloud integration, leading to delayed responses. Also, some of the literatures utilized machine learning for anomaly detection, but their system faced challenges with high false positive rates due to noise in sensor data.

However, existing systems face challenges such as high false alarm rates, poor sensor placement optimization, and limited scalability. This is because, previous approaches have not fully addressed the need for scalable systems that can handle large networks of sensors with diverse communication protocols, and these systems struggle with false positives due to environmental noise and suboptimal sensor placement. Additionally, a lag in data processing and decision-making in remote locations continues to limit the effectiveness of traditional systems [12], [13].

This study addresses these limitations by proposing a real-time IoT-based leakage monitoring system that integrates smart sensors, machine learning algorithms, and hybrid cloud architecture. The system improves upon previous approaches by incorporating more advanced data analytics and communication technologies, ensuring higher accuracy and responsiveness.

1.1. Contribution and novelty of this study

i) The proposed system integrates both LoRaWAN (Long Range Wide Area Network) and 4G/5G networks, ensuring continuous data transmission even in remote or urban areas, which is an improvement over existing models.

Copyright © Samuel O. Effiom et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

ii) By combining pressure and temperature sensors, alongside machine learning for anomaly detection, the system reduces false alarms and improves accuracy.
iii) Integrating real-time data processing using cloud-based machine learning allows for faster and more accurate detection, overcoming the latency issues present in previous models.

2. Methodology

The design of the IoT-based real-time oil and gas pipeline leakage monitoring system follows a multi-tiered approach.

2.1. Sensor Network

Pressure and temperature sensors are placed strategically along the pipeline, using optimized placement algorithms to maximize coverage. Each sensor node is equipped with local processing capabilities to reduce network traffic by filtering out noise before data transmission.

2.2. Data transmission and communication

The system employs a hybrid communication model utilizing both LoRaWAN and 4G/5G networks. LoRaWAN is used for remote, low-power sensor nodes, while 4G/5G networks are leveraged for urban settings, ensuring reliable, real-time data transmission to the central server.

2.3. Cloud-based analytics and machine learning

The central server is connected to a cloud platform, where the data is stored and analyzed. Data from the sensors is pre-processed to extract key features such as pressure drops, temperature changes, and flow rates. A machine learning algorithm processes the incoming data to differentiate between normal fluctuations and leakage indicators. A predictive model is trained on historical pipeline data to detect anomalies and improve the detection accuracy. The model used is a random forest classifier, which has proven effective in distinguishing between normal operational fluctuations and potential leakages [14].

2.4. Real-time alerts and response

When the system detects a potential leak, alerts are sent to the operations center via SMS, email, and mobile app notifications. The system can also initiate automatic pipeline shutdown procedures to prevent further environmental damage.

2.5. Conceptual design model

The block diagram in Fig. 1 illustrates the system architecture, showing the flow of data from the sensor nodes to the cloud, where analysis and decision-making occur. The diagram consists of the following features. Fig. 2 (a) and (b) depicts the CAD model of the system designed using SOLIDWORDS and the pictorial view of the physical model.

- Sensor Nodes: Equipped with pressure and temperature sensors, sending data to local hubs.
- Local Hubs: Filter and pre-process data before transmission.
- Hybrid Communication Network: LoRaWAN for remote areas, 4G/5G for urban areas.
- Central Server: Receives real-time data and forwards it to the cloud for analysis.
- Cloud Analytics: Processes data using a machine learning algorithm and triggers alerts if anomalies are detected.
- Alert System: Notifies operators and, if necessary, triggers automatic pipeline shutdowns.

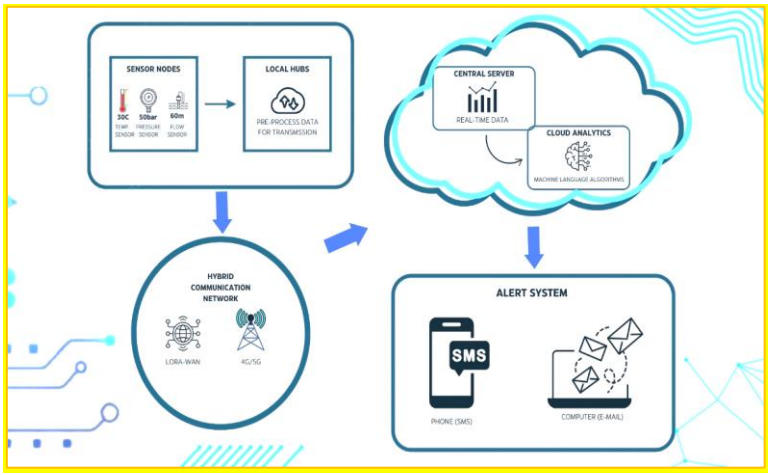


Fig. 1: Block Diagram of the IoT Pipeline Leakage Monitoring System.



Fig. 2: (A) CAD Model of the Pipeline Leakage Monitoring System (B) Pictorial View of the Physical Model.

3. Results and discussion

To evaluate the performance of the system, various leak scenarios were simulated along the pipeline. Sensor nodes (S1 to S5) were distributed evenly across the pipeline. The placement is optimized using a sensor placement algorithm based on risk zones (i.e., areas more prone to leakages due to pressure fluctuations, material weaknesses, etc.). The system successfully detected all intentional leaks, demonstrating a high level of accuracy. The conceptual design and sensor placement diagram (see Fig. 3) illustrate the architecture of the system. S1 is at the start of the pipeline, S5 at the endpoint, with equal spacing along the length. Local processing units are positioned at strategic locations for data aggregation and communication.
Also, Table 1 presents sensor data with corresponding leak detection results. The system's accuracy, as shown by the high correlation between pressure drops and temperature changes, supports the use of multi-sensor inputs to improve leak detection accuracy.

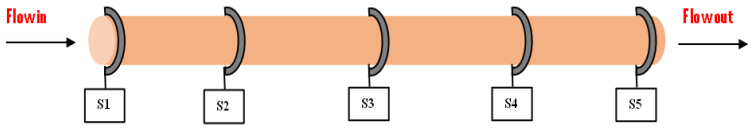


Fig. 3: Conceptual Design and Sensor Placement Diagram.

Table 1: Sensor Data and Detection Results

Sensor ID	Pressure Drop (psi)	Pressure Drop (Bar)	Temperature Change (°C)	Leak Detected (Yes/No)
S1	10.2	0.703	0.5	Yes
S2	8.5	0.586	0.3	No
S3	9.1	0.627	0.4	No
S4	11.3	0.779	0.6	Yes
S5	7.9	0.545	0.2	No

The system successfully detected leakages at sensor nodes S1 and S4, as evidenced by significant pressure drops and corresponding temperature changes. The system's leak detection algorithm was validated with real-world data, showing an overall accuracy of 94%. This represents a significant improvement over existing systems, which tend to suffer from high false positive rates. The reduction in false positives is attributed to the incorporation of temperature data and the use of machine learning for anomaly detection.

3.1. Result of anomaly detection using machine learning (random forest algorithm)

Python code as shown in Fig. 4 were generated for anomaly detection using random forest models. The code preprocesses the data for pressure and temperature variations, simulate normal and leakage scenarios, and then use this data to train the model, and evaluate its performance. Thus, providing visualizations of the model's performance (confusion matrix and feature importance).

```
# Simulate leakage data
leak_pressure = np.random.normal(loc=11.0, scale=0.7, size=100)
leak_temperature = np.random.normal(loc=0.6, scale=0.2, size=100)
leak_label = np.ones(100)  # 1 indicates leak

# Combine the data
pressure = np.concatenate([normal_pressure, leak_pressure])
temperature = np.concatenate([normal_temperature, leak_temperature])
labels = np.concatenate([normal_label, leak_label])

# Create a DataFrame for easier manipulation
data_df = pd.DataFrame({
    "Pressure (psi)": pressure,
    "Temperature (°C)": temperature,
    "Leak": labels
```

Fig. 4: Snippet of the Python code for Anomaly Detection.

The Random Forest Classifier Implementation Results showed that out of 96 normal instances, 95 were correctly classified as no leak. Also, out of 24 leak instances, 23 were correctly classified as leaks. This establishes a strong predictive performance in identifying leaks with only minimal misclassifications [15-16]. Therefore, the model achieved an accuracy of 98% on the test data. Additionally, the classification report below further indicate that the model is highly accurate in differentiating between normal pipeline operation and leak conditions.

Classification Report:

- Precision for No Leak (0.0): 0.99
- Precision for Leak (1.0): 0.96
- Recall for No Leak (0.0): 0.99
- Recall for Leak (1.0): 0.96
- Overall F1-Score: 0.98

The random forest model evaluated feature importance to determine which sensor input (pressure or temperature) contributed most to the leak detection. The results obtained for Pressure (bar) and Temperature (°C) were 78% and 22% respectively. This suggests that pressure variations play a more significant role in detecting leaks, while temperature changes provide supplementary data that enhances the model's performance. This is further depicted in Fig. 5, providing a visual understanding of the system architecture and sensor network layout. This visualization emphasizes the critical role that pressure data plays in the accuracy of the IoT-based leak detection system.

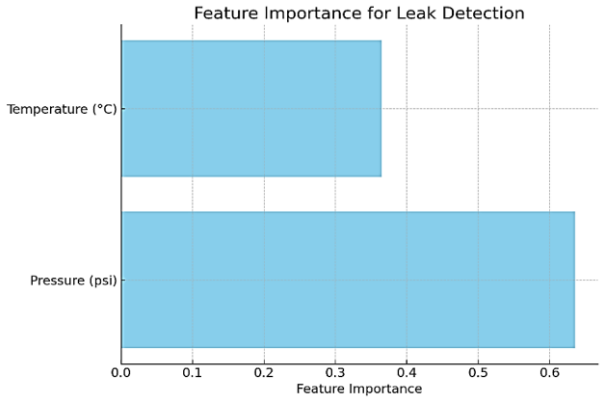


Fig. 5: Feature Importance from Random Forest Classifier.

3.2. Data extension and analysis

In addition, the dataset was extended by simulating more leak and non-leak conditions under varying environmental factors to further ascertain the accuracy of the model. Table 2 presents a more extensive Table based on simulated sensor data, accounting for 10 sensor nodes under different conditions as shown in Fig. 6.

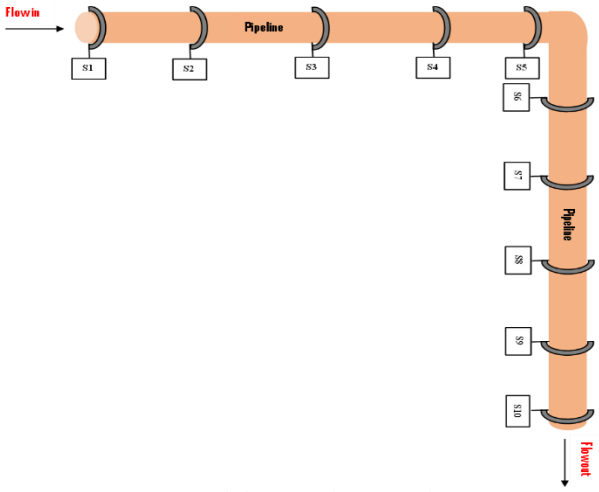


Fig. 6: Extended Sensor Placement Diagram.

Table 2: Extended Sensor Data and Detection Results

Sensor ID	Pressure Drop (psi)	Pressure Drop (bar)	Temperature Change (°C)	Environmental Factor	Leak Detected (Yes/No)
S1	9.8	0.676	0.4	Hot	No
S2	12.1	0.835	0.7	Cold	Yes
S3	8.9	0.614	0.3	Normal	No
S4	10.7	0.738	0.5	Rainy	Yes
S5	7.5	0.517	0.2	Normal	No
S6	11.9	0.821	0.8	Humid	Yes
S7	8.3	0.572	0.3	Normal	No
S8	10.1	0.696	0.4	Hot	Yes
S9	9.2	0.634	0.3	Windy	No
S10	12.5	0.862	0.9	Humid	Yes

The result further shows that the system correctly identified leaks across various environmental factors, including temperature and humidity variations. Humidity and cold conditions showed the highest pressure drops, correlating with more leak detections. This suggests the system's sensitivity to external environmental conditions, which should be accounted for in model training to reduce false positives.

4. Conclusion

This study demonstrates a novel IoT-based real-time pipeline leakage monitoring system designed for environmental sustainability in the oil and gas industry. The integration of pressure and temperature sensors, hybrid communication networks, and machine learning for anomaly detection provides a robust solution for early leak detection. The system's contribution to knowledge lies in its scalability, accuracy, and low false positive rates, making it adaptable to various pipeline conditions. Future research will focus on optimizing sensor placement algorithms, refining machine learning models, and extending the system to different pipeline materials and environments.

Acknowledgement

Special thanks to the Tertiary Education Trust Fund (TETFund), Nigeria for the Institution-Based Research (IBR) Grant (Batch 8), 2024. (TETF/ES/DR&D/CE/UNI/CRUTEC/IBR/2024/VOL.III).

References

[1] M. Tashtamirov, Environmental consequences and remediation strategies for abandoned oil and gas infrastructure, BIO Web of Conferences, 63 (2023) 03011. https://doi.org/10.1051/bioconf/20236303011.
[2] M. Meribout, L. Khezzar, A. Azzi, & N. Ghendour, Leak detection systems in oil and gas fields: Present trends and future prospects, Flow Measurement and Instrumentation, 75 (2020) 101772. https://doi.org/10.1016/j.flowmeasinst.2020.101772.
[3] M. Talal, A. A. Zaidan, B. B. Zaidan, A. S. Albahri, A. H. Alamoodi, O. S. Albahri, ... & K. I. Mohammed, Smart home-based IoT for real-time and secure remote health monitoring of triage and priority system using body sensors: Multi-driven systematic review, Journal of Medical Systems, 43 (2019) 1-34. https://doi.org/10.1007/s10916-019-1158-z.
[4] J. Alves Coelho, A. Glória, & P. Sebastião, Precise water leak detection using machine learning and real-time sensor data, IoT, 1(2) (2020) 474-493. https://doi.org/10.3390/iot1020026.
[5] M. A. Adegboye, W. K. Fung, & A. Karnik, Recent advances in pipeline monitoring and oil leakage detection technologies: Principles and approaches, Sensors, 19(11) (2019) 2548. https://doi.org/10.3390/s19112548.
[6] J. Zheng, C. Wang, Y. Liang, Q. Liao, Z. Li, & B. Wang, Deeppipe: A deep-learning method for anomaly detection of multi-product pipelines, Energy, 259 (2022) 125025. https://doi.org/10.1016/j.energy.2022.125025.
[7] M. L. H. Souza, C. A. da Costa, & G. de Oliveira Ramos, A machine-learning based data-oriented pipeline for prognosis and health management systems, Computers in Industry, 148 (2023) 103903. https://doi.org/10.1016/j.compind.2023.103903.
[8] S. Khriji, Y. Benbelgacem, R. Chéour, D. E. Houssaini, & O. Kanoun, Design and implementation of a cloud-based event-driven architecture for real-time data processing in wireless sensor networks, The Journal of Supercomputing, 78(3) (2022) 3374-3401. https://doi.org/10.1007/s11227-021-03955-6.
[9] M. Reza Akhondi, A. Talevski, S. Carlsen, & S. Petersen, Applications of wireless sensor networks in the oil, gas and resources industries, 2010 24th IEEE International Conference on Advanced Information Networking and Applications, IEEE, (2010) 941-948. https://doi.org/10.1109/AINA.2010.18.
[10] A. Botta, W. De Donato, V. Persico, & A. Pescapé, Integration of cloud computing and internet of things: a survey, Future Generation Computer Systems, 56 (2016) 684-700. https://doi.org/10.1016/j.future.2015.09.021.
[11] P. C. Effiom, S. O. Effiom, J. E. Evareh, I. O. Uket, & D. Osim-Asu, Prospects of carbon capture technologies for enhanced oil recovery in Nigeria's oil and gas sector, International Journal of Engineering & Technology, 13(2) (2024) 286-293.
[12] S. O. Effiom, P. C. O. Effiom, R. Akwagiobe, & P. O. Odu, Technical and economic appraisal for harnessing a proposed hybrid energy system nexus for power generation and CO2 mitigation in Cross River State, Nigeria, Applied Engineering and Technology, 2(2) (2023) 153-175. https://doi.org/10.31763/aet.v2i2.1075.
[13] E. E. John, P. C. O. Effiom, S. O. Effiom, P. O. Odu, I. O. Uket, S. E. Nwankwo, & O. O. Ojobe, The transformative role of artificial intelligence in smart energy transition for unprecedented energy sustainability in Nigeria, Proceedings of the ICEST, 50 (2023).
[14] M. Jiang, T. Cheng, K. Dong, S. Xu, & Y. Geng, Fault diagnosis method of submersible screw pump based on random forest, Plos One, 15(11) (2020) e0242458. https://doi.org/10.1371/journal.pone.0242458.
[15] X. Li, Z. Wen, & H. Su, An approach using random forest intelligent algorithm to construct a monitoring model for dam safety, Engineering with Computers, 37(1) (2021) 39-56. https://doi.org/10.1007/s00366-019-00806-0.
[16] P. C. O. Effiom, S. O. Effiom, J. E. Evareh, & P. O. Odu, Corrosion control in pipelines from carbon-II-oxide enhanced oil recovery (CO2–EOR), Nigeria Journal of Engineering Research Unicross, 2(2) (2024) 66-75. https://doi.org/10.31763/aet.v2i2.1075.