

Effect of La-concentration (x) on some physical properties of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys

Abdelfateh Benmakhlouf ¹, Rabie Mezouar ^{1,2}, Salah Daoud ^{1*}

¹Laboratory of Materials and Electronic Systems (LMSE), Faculty of Sciences and Technology, University Mohamed El Bachir El Ibra-himi of Bordj Bou Arreridj, 34000 Bordj Bou Arreridj, Algeria

²Institute of Optics and Precision Mechanics, Ferhat Abbas Setif University, Setif, 19000, Algeria

*Corresponding author E-mail: salah_daoud07@yahoo.fr

Abstract

In the present work, we studied the effect of the incorporation of Lanthanum (La) atoms into Samarium monosulfide (SmS) small gap magnetic semiconductor binary compound. So some physical properties of pure (SmS) and La-doped SmS compound $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) ternary alloys were obtained. We found that the longitudinal wave velocity of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ternary alloys decreases monotonically and non-linearly with increasing La-concentration (x) from 0 to 35%, while the transverse and average elastic wave velocities, Debye temperature and Vickers Hardness for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) ternary alloys change non-monotonically and varied non-linearly with increasing La-concentration (x). For $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) ternary alloys, the lattice parameters and the elastic constants used here are taken from the work of Schärer and Wachter (Solid State Communications, Vol. 96, No. 7, (1995), pp. 497–501), while for SmS divalent chalcogenide binary compound, the elastic constants used here are taken from the book edited by Sirdeshmukh et al. (D. B. Sirdeshmukh, L. Sirdeshmukh, K. G. Subhadra, Micro-and macro-properties of solids, Springer-Verlag Berlin Heidelberg, 2006, page 269). The Debye temperature was calculated using two different approaches (Debye's approach and Blackman's approach) To the best of author knowledge, there is no any data in the literature on the Debye temperature and the minimum thermal conductivity for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) ternary alloys to make comparison.

Keywords: Elastic Constants; Elastic Wave Velocity; $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) Ternary Alloys; Debye Temperature.

1. Introduction

Chalcogenides are the compounds of the heavier chalcogens (sulfides, selenides, and tellurides) [1]. These compounds would afford a wide range of applications. Using the pseudopotentials, Density Functional Theory (DFT) method, Joshi [1] has studied the high-pressure phase transition of the lanthanum monochalcogenides LaX ($X = \text{S, Se, Te}$), while Okba and Mezouar [2] have investigated some physical parameters of calcium chalcogenides at high pressures using semi-empirical approach.

Until now, reported literature showed very little attention has been paid to study the physical properties of SmS compound and $\text{Sm}_x\text{La}_{1-x}\text{S}$ ($x = 0.9, 0.75, 0.65$) ternary alloys is still to be discussed [3-6] in comparison with these reported for other materials [7-27].

Using the angular dispersion of the velocity of the surface acoustic phonons in the (100)-oriented plane and the measured bulk moduli, Schärer and Wachter [3] have calculated all elastic constants and Poisson's ratio of $\text{Sm}_x\text{La}_{1-x}\text{S}$ ($x = 0.9, 0.75, 0.65$) ternary alloys, and they found also that the values of the elastic constant C_{12} are negative for all these alloys.

Jha and Sanyal [4] have investigated the phonon dispersion curves (PDC) and the phonon density of states (PDOS) for $\text{Sm}_x\text{La}_{1-x}\text{S}$ ($x = 0.9, 0.75, 0.65$) alloys using a lattice dynamical model theory which includes the breathing motion of valence electrons of rare earth ions. Based on the breathing shell model (BSM), and they conclude that there are phonon anomalies in these ternary alloys.

Arya and Aynyas[5] have studied the second order elastic constants (SOEC), third order elastic constants (TOEC) and the high-pressure phase transition of $\text{Sm}_x\text{La}_{1-x}\text{S}$ ($x = 0.9, 0.75, 0.65$) ternary alloys using the modified inter-ionic potential theory (MIPT). Arya and Aynyas[5] found the following phase transition pressures: 49.25 GPa for $\text{Sm}_{0.9}\text{La}_{0.1}\text{S}$ alloy, 55 GPa for $\text{Sm}_{0.75}\text{La}_{0.25}\text{S}$ alloy, and 63 GPa for $\text{Sm}_{0.65}\text{La}_{0.35}\text{S}$ alloy, respectively. However, to our knowledge, no thorough investigations in to the Debye temperature of $\text{La}_x\text{Sm}_{1-x}\text{S}$ alloys have been carried out up to date. For this reason, some physical properties of $\text{La}_x\text{Sm}_{1-x}\text{S}$ alloys are carefully examined in this study. So in the present work, we studied the effect of the incorporation of Lanthanum (La) atoms in SmS compound. SmS is a semiconductor with a very small gap of 0.1 eV between the 4f and 5d band shows intermediate valence at normal pressure [5]. So some physical properties of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) ternary alloys were obtained and discussed. For $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) alloys, the experimental lattice parameters and the elastic constants used here are taken from the work of Schärer and Wachter [3], while for SmS compound, the elastic constants are taken from the work of Sirdeshmukh et al [28].

2. Theory and discussion of the results

The requirement of mechanical stability in a cubic crystal leads to the following restrictions on the elastic constants, $(C_{11} - C_{12}) > 0$, $C_{11} > 0$, $C_{44} > 0$, $(C_{11} + 2C_{12}) > 0$ [29-32]. The elastic constants C_{ij} in table 2 of Schärerand Wachter [3] obey these stability conditions. Cauchy's pressure ($C_p = C_{12} - C_{44}$) is an index for determining the ductile/brittle nature of compounds, where positive values of C_p correspond to ductile materials, while negative values of C_p indicate the brittleness, i.e. the material will be non-metallic or with directional bonding [33, 34]. The elastic constants in table 2 of Schärerand Wachter [3] meaning that C_p is negative for $\text{Sm}_x\text{La}_{1-x}\text{S}$ ($x = 0.9, 0.75, 0.65$) ternary alloys reflecting that all these materials are expected to be brittle in their behaviours.

Using the lattice parameters and the elastic constants of Schärerand Wachter [3] for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) ternary alloys, and the elastic constants are taken from the work of Sirdeshmukh et al [28] for Samarium monosulfide SmS binary semiconducting compound, the values of the longitudinal (v_l), transverse (v_t) and average (v_m) elastic wave velocities and Debye temperature (θ_D) for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) ternary alloys are presented in Table 1. For more details on the calculation of v_l , v_t , v_m and θ_D for the aggregate polycrystalline solids from Debye's approach, please see the references [35-38]. In cubic systems, θ_D can be expressed in terms of the elastic constants C_{ij} and the mass density ρ using Blackman's approach, which is given by the following expression [39-40]:

$$\theta_D^3 = \frac{3.15}{8\pi} h^3 k^{-3} (n\rho^{-3/2} V_a^{-1}) (C_{11} - C_{12})^{1/2} (C_{11} + C_{12} + 2C_{44})^{1/2} (C_{44})^{1/2} \quad (1)$$

Where h is the Planck's constant, k is the Boltzmann constant, n is the number of atoms in unit cell of volume V_a , and ρ is the density.

Table 1: Masse Density ρ , Longitudinal, Transverse and Average Elastic Wave Velocities and Debye Temperature of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) Ternary Alloys in Comparison with Other Available Data [28], *Using Debye's Approach, **Using Blackman's Approach

Material	M (g/mol)	ρ (kg/m ³) [3]	v_l (km/s)	v_t (km/s)	v_m (km/s)	θ_D (K)
SmS	182.43	5706	4.040	2.454	2.711	271*, 300**, 268 [28]
$\text{La}_{0.1}\text{Sm}_{0.9}\text{S}$	181.28	5761	3.791	2.571	2.804	281*, 306**
$\text{La}_{0.25}\text{Sm}_{0.75}\text{S}$	179.56	5911	3.300	2.528	2.705	275*, 289**
$\text{La}_{0.35}\text{Sm}_{0.65}\text{S}$	178.42	5908	3.175	2.508	2.668	272*, 281**

The values of the longitudinal (v_l), transverse (v_t) and average (v_m) elastic wave velocities and Debye temperature (θ_D) for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) ternary alloys are also traced in Figure 1.

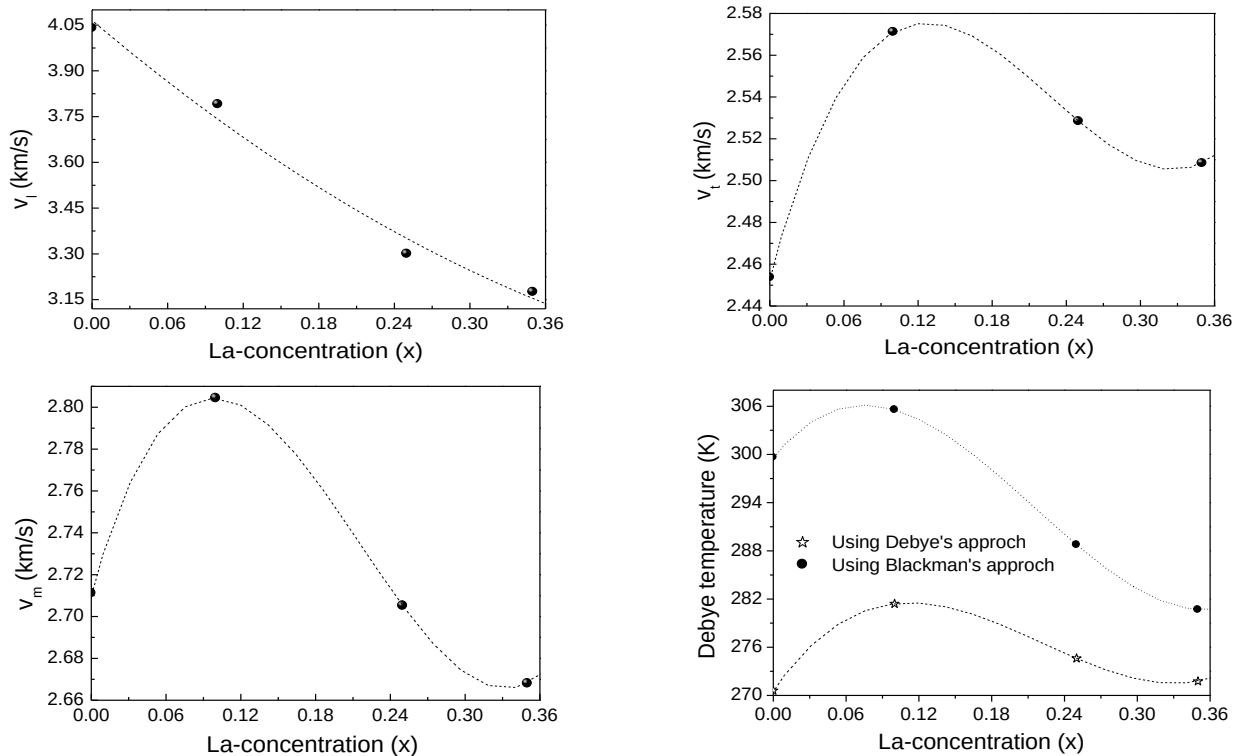


Fig. 1: Influence of La-Concentration on the Elastic Wave Velocities and Debye Temperature of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) Alloys.

From the results reported in Table 1, it is seen that the values of the Debye temperature obtained from Blackman's approach is higher than those calculated from Debye's approach. In addition, for SmS binary compound, the deviation on the θ_D between our result (271 K) and that (268 K) of Sirdeshmukh et al [28] using the same approach is only 1.12%, and a good agreement is obtained. A material would have high value of high-temperature superconductivity T_c , provided its θ_D is large [41]. From the curves of Figure 1, it is seen that the longitudinal wave velocity of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) decreases monotonically and non-linearly with increasing La-concentration (x), while the transverse and average elastic wave velocities and Debye temperature change non-monotonically and vary non-linearly with increasing La-concentration (x). Because the vibrational excitation arises solely from acoustic modes at low temperature, so, the Debye temperature calculated from elastic constants is the same as that determined from specific heat measurements [42].

If one dimension of the solid changed, other its dimensions need to be changed to keep the volume constant. The Poisson's ratio is expressed as a function of Young's modulus E and shear modulus G as follows: $\nu = (E/2G) - 1$ [43]. We found the values of the Poisson's

ratio: 0.21 for SmS, 0.07 for $\text{La}_{0.1}\text{Sm}_{0.9}\text{S}$, - 0.21 for $\text{La}_{0.25}\text{Sm}_{0.75}\text{S}$ and - 0.33 for $\text{La}_{0.35}\text{Sm}_{0.65}\text{S}$, respectively. The negative sign of the Poisson's ratio was also obtained in the work of Schärer and Wachter [3] in $\langle 100 \rangle$ -direction.

The hardness has a significant effect on the applications of the functional materials [44]. If the elastic moduli of the aggregate polycrystalline solids are known, it is possible to use them to calculate their hardness and several other parameters [45-50]. The Vickers hardness H_V and the shear modulus G are related by the empirical formula given as: $H_V = 0.1475 \times G$ [51, 52]. It is well known that the micro-hardness of a material changes considerably as a function of dislocation density [53]. The values estimated at room temperature of the shear modulus G and the Vickers hardness H_V for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys depending on the doping concentration of La are also traced in Figure 2. From the curves of Figure 2, it is seen that the Vickers hardness H_V of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) ternary alloys change also non-monotonically and vary non-linearly with increasing La-concentration (x). Our data's optimal fits for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys conform to the polynomial equations: $G = 34.4 + 63x - 297.3x^2 + 400.7x^3$ (with G in GPa) and $H_V = 7.6 + 28.7x - 134.5x^2 + 196.4x^3$ (with H_V in GPa), respectively. The values of G and H_V for SmS binary compound seem also to be the smallest ones as compared to those for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) alloys.

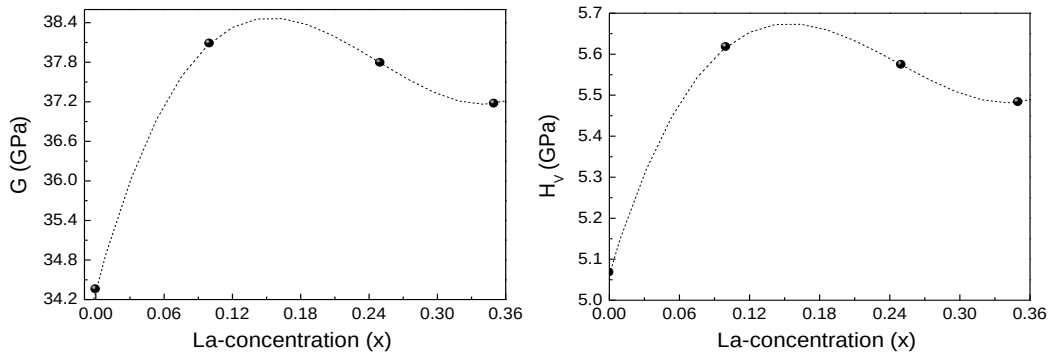


Fig. 2: Influence of La-Concentration (x) on the Isotropic Shear Modulus G and Vickers Hardness H_V of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) Alloys.

The combination of the bulk modulus B and the elastic constant C_{44} can be used to evaluate a compound's machinability through the machinability index $\mu_M = B/C_{44}$ [54]. μ_M offers a value that indicates the level of ease or difficulty in machining a specific compound, involving processes such as cutting or shaping it into different forms [54]. The values estimated at room temperature of μ_M for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) depending on x of La-concentration (x) are also traced in Figure 3. It is seen that the machinability index μ_M of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys decreases monotonically and non-linearly with increasing x .

Fracture toughness K_{IC} plays a pivotal role in the design and selection of materials [55-58]. For many covalent and ionic materials, the fracture toughness K_{IC} has been calculated using the following empirical expression $K_{IC} = V_0^{1/6}(B/G)^{1/2}G$ [55-58], where V_0 is the atomic volume (given in m^3), B is the bulk modulus and G is the shear modulus (both B and G are given in MPa). The values of the fracture toughness K_{IC} for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) ternary alloys are plotted in Figure 3.

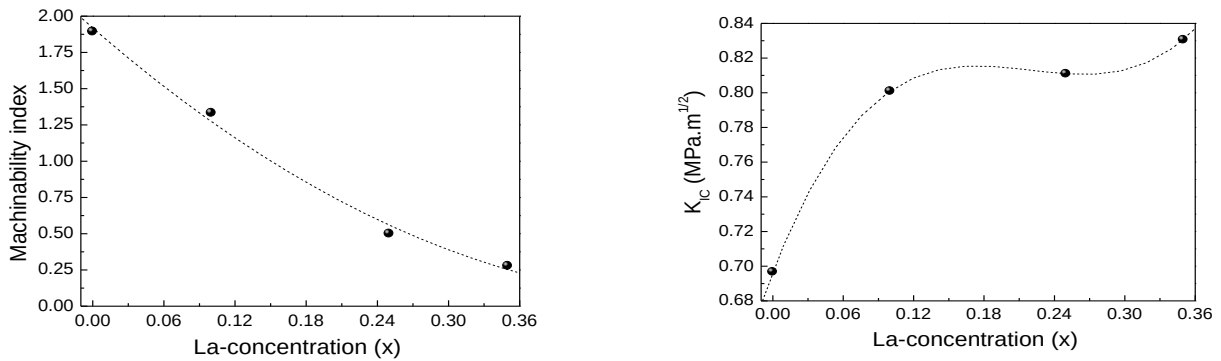


Fig. 3: Influence of La-Concentration (x) on the Machinability Index and The Fracture Toughness K_{IC} of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) Alloys.

Our data's optimal fit of the fracture toughness K_{IC} for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys as a function of La-concentration (x) conforms to the third order polynomial equation: $K_{IC} = 0.70 + 1.45x - 8.33x^2 + 12.64x^3$ (with K_{IC} in $\text{MPa.m}^{1/2}$).

In this section of the present work, we try to estimate the minimum thermal conductivity ($\kappa_{\min}$) of $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys. $\kappa_{\min}$ of some ceramic materials were calculated by Clarke [59]. Based on this model which suggested that the theoretical minimum conductivity could be calculated after replacing different atoms by an equivalent atom with a mean atomic mass of M/n [60], [61]:

$$\kappa_{\min} \rightarrow k_B v_m (M / n g N)^{-2/3} \quad (2)$$

where k_B is the Boltzmann's constant, v_m is the average sound velocity, N is the Avogadro's number, g is the density, M is the molecular weight, and n is the number of atoms in the molecule.

Our numerical estimation of the $\kappa_{\min}$ for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0, 0.1, 0.25$ and 0.35) alloys are: 0.42 W/K.m for SmS, 0.44 W/K.m for $\text{La}_{0.1}\text{Sm}_{0.9}\text{S}$, 0.44 W/K.m for $\text{La}_{0.25}\text{Sm}_{0.75}\text{S}$ and 0.45 W/K.m for $\text{La}_{0.35}\text{Sm}_{0.65}\text{S}$, respectively. It has been proven that material having higher Debye temperature, possessing greater wave speed velocity and greater thermal conductivity, and vice versa [62-64].

3. Conclusion

In conclusion, we made a study on the effect of the incorporation of Lanthanum-atoms into SmS semiconductor. In consequence some physical and mechanical properties of SmS binary semiconductor and $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) ternary alloys were estimated at room temperature and analyzed. We found that the longitudinal wave velocity of $\text{La}_x\text{Sm}_{1-x}\text{S}$ material decreases monotonically and non-linearly with increasing La-concentration (x), while the transverse and average elastic wave velocities and Debye temperature for $\text{La}_x\text{Sm}_{1-x}\text{S}$ alloys change non-monotonically and vary non-linearly with increasing La-concentration (x). The aggregate Poisson's ratio was found positive for both for SmS and $\text{La}_{0.1}\text{Sm}_{0.9}\text{S}$ alloy and negative for both $\text{La}_{0.25}\text{Sm}_{0.75}\text{S}$ and $\text{La}_{0.35}\text{Sm}_{0.65}\text{S}$ ternary alloys. To the best of author knowledge, there is no any data in the literature on the Debye temperature, Vickers hardness, fracture toughness, and the minimum thermal conductivity for $\text{La}_x\text{Sm}_{1-x}\text{S}$ ($x = 0.1, 0.25$ and 0.35) to evaluate our obtained results and make comparison.

References

- [1] M. J. Joshi, "Physical properties of several elements, compounds and alloys using pseudopotentials and density functional theory", Thesis of Doctor of Philosophy in Physics, Sardar Patel University, India (2010).
- [2] F. Okba and R. Mezouar, "Some physical parameters of calcium chalcogenides at high pressures: Semi-empirical approach", Journal of Nano-and Electronic Physics, Vol. 14 No 4, (2022), pp.04004 (4pp). [https://doi.org/10.21272/jnep.14\(4\).04004](https://doi.org/10.21272/jnep.14(4).04004).
- [3] U. Schärer and P. Wachter, "Negative elastic constants in intermediate valent $\text{Sm}_x\text{La}_{1-x}\text{S}$ ", Solid State Communications, Vol. 96, No. 7, (1995), pp. 497–501. [https://doi.org/10.1016/0038-1098\(95\)00418-1](https://doi.org/10.1016/0038-1098(95)00418-1).
- [4] Prafulla K. Jha and Sankar P. Sanyal, "Phonon anomalies in intermediate valent $\text{Sm}_x\text{La}_{1-x}\text{S}$ ", Solid State Communications, Vol. 105, No. 7, (1998), pp. 455–458. [https://doi.org/10.1016/S0038-1098\(97\)10153-3](https://doi.org/10.1016/S0038-1098(97)10153-3).
- [5] B. S. Arya and M. Aynyas, "Pressure induced structural phase transition and elastic properties in $\text{Sm}_x\text{La}_{1-x}\text{S}$ compounds", International Journal of Chemical and Physical Sciences, Vol. 7, No. 12, (2018), pp. 353–358.
- [6] T. Hailing, G. A. Saunders and H. Bach, "Elastic behavior under pressure of semiconducting SmS", Physical Review B, Vol. 29, No.4, (1984), pp. 1848–1857. <https://doi.org/10.1103/PhysRevB.29.1848>.
- [7] S. Daoud, "Empirical study of elastic properties of BX ($X = \text{As}, \text{Sb}$) materials", International Journal of Scientific World, Vol.3, No.1, (2015), pp. 37–42. <https://doi.org/10.14419/ijsw.v3i1.4022>.
- [8] S. Daoud, N. Bioud and N. Lebga, "Elastic and piezoelectric properties, sound velocity and Debye temperature of (B3) BBi compound under pressure", Pramana journal of physics, Vol. 81, No. 5, (2013), pp. 885–892. <https://doi.org/10.1007/s12043-013-0596-2>.
- [9] S. Daoud, "Sound velocities and Debye temperature of BeSe under high pressure up to 50 GPa", International Journal of Physical Research, Vol. 5, No. 1, (2017), pp. 7–10. <https://doi.org/10.14419/ijpr.v5i1.7013>.
- [10] R. Mezouar and N. Logzit, "Plasmon energy and microhardness of $\text{B}_x\text{Al}_{1-x}\text{Sb}$ alloys: semi-empirical prediction", International Journal of Physical Research, Vol. 11, No 1, (2023), pp. 1–4. <https://doi.org/10.14419/ijpr.v11i1.32245>.
- [11] Z. Nabi, S. Amari, S. Mecabih, A. Zaoui, B. Abbaz, B. Bouhafs and R. Ahuja, "Ferromagnetism in CdOX ($X = \text{Mn}$ and N) with and without intrinsic point defects: A density functional theory", Results in Physics, Vol. 3, (2013), pp. 205–208. <https://doi.org/10.1016/j.rinp.2013.09.009>.
- [12] S. Daoud, "Simplified expressions for calculating Debye temperature and melting point of II-VI and III-V semiconductors", International Journal of Scientific World, Vol. 3, No.2, (2015), pp. 275–279. <https://doi.org/10.14419/ijsw.v3i2.5314>.
- [13] S. Daoud, N. Bioud and N. Lebga, "Structural, elastic, piezoelectric and electronic properties of (B3) AlP compound under pressure", Journal of optoelectronics and advanced materials, Vol. 16, No. 1-2, (2014), pp. 207–214.
- [14] S. Daoud, N. Bioud, N. Lebga, L. Belagraa and R. Mezouar, "Pressure effect on structural, elastic and electronic properties of (B3)BSb compound", Indian Journal of Physics, Vol. 87, No.4, (2013), pp. 355–362. <https://doi.org/10.1007/s12648-012-0231-y>.
- [15] S. Daoud and N. Bioud, "Structural properties of (B3) TIP under pressure", International Journal of Physical Research, Vol. 2, No. 2, (2014), pp. 50–55. <https://doi.org/10.14419/ijpr.v2i2.3100>.
- [16] S. Daoud, "Sound velocities and thermal properties of BeX ($X = \text{S}, \text{Se}$ and Te) alkaline-earth chalcogenides", International Journal of Scientific World, Vol. 5, No. 1 (2017), pp. 9–12. <https://doi.org/10.14419/ijsw.v5i1.6929>.
- [17] S. Daoud, N. Bioud and P. K. Saini, "Finite temperature thermophysical properties of MgCu intermetallic compound from quasi-harmonic Debye model", Journal of Magnesium and Alloys, Vol. 7, No. 2, (2019), pp. 335–344. <https://doi.org/10.1016/j.jma.2019.01.006>.
- [18] N. Bioud and N. Benchiheb, "Pressure effect on some physical properties of calcium oxide material", Chemical Physics Impact, Vol. 7, (2023), pp. 100342 (5 pages). <https://doi.org/10.1016/j.chphi.2023.100342>.
- [19] N. Bioud, "Some physical properties of K_2TlAsX_6 ($X = \text{Cl}, \text{Br}$) and CsPbBr_3 semiconducting compounds", International Journal of Advanced Chemistry, Vol. 12, No 1, (2024), pp. 26–30. <https://doi.org/10.14419/ijaz.v12i1.32228>.
- [20] A. Benmakhlouf, A. Benmakhlouf, O. Allaoui and S. Daoud, "Theoretical study of elastic and thermodynamic properties of CuSc intermetallic compound under high pressure", Chinese Journal of Physics, Vol. 57, (2019), pp. 179–188. <https://doi.org/10.1016/j.cjph.2018.11.017>.
- [21] N. Bioud, "Debye temperature of CaO under high pressure up to 65.2 GPa", International Journal of Advanced Chemistry, Vol. 11, No 1, (2023), pp. 6–9. <https://doi.org/10.14419/ijac.v11i1.32228>.
- [22] S. Daoud, "Sound velocities and thermal properties of BX ($X = \text{As}, \text{Sb}$) compounds", International Journal of Scientific World, Vol.3, No.1, (2015), pp. 43–48. <https://doi.org/10.14419/ijsw.v3i1.4039>.
- [23] S. Daoud, "Comment on Ab initio calculations of B2 type RHg ($R = \text{Ce}, \text{Pr}, \text{Eu}$ and Gd) intermetallic compounds", The European Physical Journal B, Vol. 89, (2016), pp. 47 (2 pages). <https://doi.org/10.1140/epjb/e2016-60844-9>.
- [24] S. Amari, H. Rekab-Djabri and S. Daoud, "Mechanical, thermal, electronic, and magnetic properties of $\text{Ca}_{0.75}\text{Er}_{0.25}\text{S}$ alloy from a DFT approach: a promising material for spintronic applications", Materials Today Communications, Vol. 33, (2022), pp. 104237 (9 pages). <https://doi.org/10.1016/j.mtcomm.2022.104237>.
- [25] N. Bioud, X-W. Sun, N. Bouarissa and S. Daoud, "Elastic constants and related properties of compressed rocksalt CuX ($X = \text{Cl}, \text{Br}$): Ab initio study", Zeitschrift Für Naturforschung A, Vol. 73, No. 8, (2018), pp.767–773. <https://doi.org/10.1515/zna-2018-0120>.
- [26] S. Daoud, N. Bioud, N. Lebga and R. Mezouar, "Optoelectronic and thermal properties of boron-bismuth compound", International Journal of Physical Research, Vol. 2, No. 2, (2014), pp. 27–31. <https://doi.org/10.14419/ijpr.v2i2.2760>.
- [27] N. Benkara Mohammed, R. Md Nor and N. Benouattas, "Electrons extraction from MWCNT/PEO composites", Journal of Nano-and Electronic Physics, Vol. 10 No 4, (2018) 04006 (5pp). [https://doi.org/10.21272/jnep.10\(4\).04006](https://doi.org/10.21272/jnep.10(4).04006).
- [28] D. B. Sirdeshmukh, L. Sirdeshmukh and K. G. Subhadra, Micro-and macro-properties of solids, Springer-Verlag Berlin Heidelberg, 2006, page 269.
- [29] S. Daoud and N. Bioud, "Anisotropy and pressure effect on the elastic and mechanical properties of (B3) BN", Ukrainian Journal of Physics, Vol. 59, No. 4, (2014), pp. 418 – 425. <https://doi.org/10.15407/ujpe59.04.0418>.
- [30] S. Daoud and H. Rekab-Djabri, "Mechanical stability criterions of cubic Na_2He up to 500 GPa", International Journal of Scientific World, Vol. 9, No.2, (2023), pp. 16–19. <https://doi.org/10.14419/ijzn5np24>.
- [31] N. Bioud, K. Kassali, X-W. Sun, T. Song, R. Khenata and S. Bin Omran, "High-pressure phase transition and thermodynamic properties from first-principles calculations: Application to cubic copper iodide", Materials Chemistry and Physics, Vol. 203, (2018), pp. 362–373. <https://doi.org/10.1016/j.matchemphys.2017.10.016>.

- [32] R. Boulechfar, A. Trad Khodja, Y. Khenioui et al., " First-principal study of the structural, mechanical, electronic and thermodynamic properties of intermetallic compounds: Pd_3M (M = Sc, Y) ", International Journal of Modern Physics B, Vol. 33, No 27, (2019), pp.1950321 (14 pages). <https://doi.org/10.1142/S0217979219503211>.
- [33] S. Ram, V. Kanchana, A. Svane, S. B. Dugdale and N. E. Christensen, " Fermi surface properties of AB_3 (A = Y, La; B = Pb, In, Tl) intermetallic compounds under pressure", Journal of Physics Condensed Matter, Vol. 25, No. 3, (2013), pp. 155501 (9 pages). <https://doi.org/10.1088/0953-8984/25/15/155501>.
- [34] S. Amari, " Physical properties of Mn- and Fe-doped CaS: A DFT insights ", Computational Condensed Matter, Vol. 27, (2021), pp. e00559. <https://doi.org/10.1016/j.cocom.2021.e00559>.
- [35] Y. O. Ciftci, K. Colakoglu and E. Deligöz, "A first principles studies on TiX (X=P, As)", Central European Journal of Physics, Vol. 6, No. 4, (2008), pp. 802-807. <https://doi.org/10.2478/s11534-008-0109-y>.
- [36] S. Boucetta and F. Zegrar, "Density functional study of elastic, mechanical and thermodynamic properties of MgCu with a CsCl-type structure", Journal of Magnesium and Alloys, Vol. 1, No. 2, (2013), pp. 128–133. <https://doi.org/10.1016/j.jma.2013.05.001>.
- [37] Md. Lokman Ali and Md. Zahidur Rahaman, "Investigation of different physical aspects such as structural, mechanical, optical properties and Debye temperature of Fe_2ScM (M=P and as) semiconductors: A DFT-based first principles study", International Journal of Modern Physics B, Vol. 32, No.10, (2018), pp. 1850121 (14 pages). <https://doi.org/10.1142/S0217979218501217>.
- [38] Chandra K. Singh, Anjani K. Pandey and Brijesh K. Pandey, "Theoretical prediction of Debye temperature & elastic constants of geophysical mineral", AIP Conference Proceedings, Vol. 1728, (2016) pp. 020047 (4 pages). <https://doi.org/10.1063/1.4946097>.
- [39] N. Bioud, "Etude des propriétés structurales, élastiques et thermodynamiques des halogénures à base de cuivre", Thèse de doctorat, Université de Sétif 1, (2018).
- [40] S. Daoud, "Mechanical properties of BBi compound under pressure", International Journal of Scientific World, Vol. 3, No.1, (2015), pp. 69-75. <https://doi.org/10.14419/ijsw.v3i1.4218>.
- [41] S. Narain, "Analysis of the Debye temperature for $\text{A}^{\text{NB}}\text{B}^{\text{N}}$ type crystals", Physica Status Solidi B, Vol. 182, No. 2, (1994), pp. 273–278. <https://doi.org/10.1002/pssb.2221820203>.
- [42] S. Daoud, N. Bioud, N. Lebga, "Mechanical, piezoelectric and some thermal properties of (B3) BP under pressure", Journal of Central South University of Technology, Vol. 21, No. 1, (2014), pp. 58–64. <https://doi.org/10.1007/s11771-014-1915-6>.
- [43] S. Daoud, P. K. Saini and H. Rekab-Djabri, "Quasi-linear correlation between shear and Young's moduli in some polycrystalline ceramics", International Journal of Physical Research, Vol. 12, No. 1, (2024), pp. 1–4. <https://doi.org/10.14419/vt3yt649>.
- [44] Y. Linghu, X. Wu, R. Wang, W. Lian Q. Liu, "The phase stability, ductility and hardness of MoN and NbN: First-principles study", Journal of Electronic Materials, Vol. 46, (2018), pp. 1914-1925. <https://doi.org/10.1007/s11664-016-5258-y>.
- [45] S. Daoud and N. Bouarissa, "Elastic, piezoelectric and thermal properties of zinc-blende AlN under pressure ", Theoretical Chemistry Accounts, Vol. 138, No. 4, (2019), pp. 49 (10 pages). <https://doi.org/10.1007/s00214-019-2439-9>.
- [46] L. Boutahar, A. Benamrani, Z. Er, N. Bioud and Z. Rouabah, "Elastic constants of tetragonal $\text{C}_{42}\text{ZnSnS}_4$ semiconductor: Ab-initio calculation ", Annals of West University of Timisoara-Physics, Vol. 64, No. 1, (2022), pp.55-67. <https://doi.org/10.2478/awutp-2022-0004>.
- [47] S. Amari and S. Daoud, "Structural phase transition, elastic constants and thermodynamic properties of TmAs: An ab-initio study", Computational Condensed Matter, Vol. 33, (2022), pp. e00764 (8 pages). [https://doi.org/10.1016/0022-3697\(95\)00265-0](https://doi.org/10.1016/0022-3697(95)00265-0).
- [48] F. Bounab, N. Bouarissa, A. Merrouche, A. Benmakhlouf, S. Daoud, N. Chelali, "Theoretical investigation of elastic constants and related properties of compressed PbO_2 ", Journal of Computational Electronics, Vol. 18, No. 4, (2019), pp. 1111–1118. <https://doi.org/10.1007/s10825-019-01372-w>.
- [49] R. S. Sunmonu, O. Y. Fadimu and O. I. Sonde, "Ab-initio probe into the elastic, mechanical and thermo-mechanical properties of CsSe binary compound ", International Journal of Modern Physics B, Vol. 37, No. 23, (2023), pp. 2350221. <https://doi.org/10.1142/S0217979223502211>.
- [50] R. Mezouar, N. Logzit and A. Benmakhlouf, " Elastic wave speeds, Debye temperature and microhardness of YX_3 (X = In, Sn, Tl and Pb) intermetallic compounds", International Journal of Advanced Chemistry, Vol. 12, No. 1, (2024), pp. 31-34. <https://doi.org/10.14419/6qw7ft35>.
- [51] S. Daoud, "Empirical prediction of thermal properties, microhardness and sound velocity of cubic zinc-blende AlN", Semiconductor Physics, Quantum Electronics and Optoelectronics, Vol. 22, No. 4, (2019), pp. 404–409. <https://doi.org/10.15407/spqeo22.04.404>.
- [52] A. Bouhemadou, D. Allali, S. Bin-Omran, E. Muhammad Abud AlSafi, R. Khenata and Y. Al-Douri, "Elastic and thermodynamic properties of the SiB_2O_4 (B = Mg, Zn and Cd) cubic spinels: An ab initio FP-LAPW study", Materials Science in Semiconductor Processing, Vol. 38, No. 10, (2015), pp. 192–202. <https://doi.org/10.1016/j.mssp.2015.04.021>.
- [53] S. Daoud, N. Bouarissa, N. Bioud, and P. K. Saini, " High-temperature and high-pressure thermophysical properties of AlP semiconducting material: A systematic ab initio study ", Chemical Physics, Vol. 525, (2019) pp. 110399 (9 pages). <https://doi.org/10.1016/j.chemphys.2019.110399>.
- [54] A. Nesa Rima, Md Atikur Rahman, R. Ferdous, Md Nadim Mahamud Nobin and Md Ferdous Rahman, " DFT simulation to study the physical properties of ternary intermetallic materials ACuSb (A=Ca, Sr, Ba) for solar cell and TBC materials" Computational Condensed Matter, Vol. 39, No 2, (2024), pp. e00900 (12pp). <https://doi.org/10.1016/j.cocom.2024.e00900>.
- [55] A. Benamrani, S. Daoud and P. K. Saini, " Structural, elastic and thermodynamic properties of ScP compound: DFT study ", Journal of Nano- and Electronic Physics, Vol. 13, No 1, (2021), pp. 01008 (5pp). [https://doi.org/10.21272/jnep.13\(1\).01008](https://doi.org/10.21272/jnep.13(1).01008).
- [56] H. Niu, S. Niu, and A. R. Oganov, " Simple and accurate model of fracture toughness of solids", Journal of Applied Physics, Vol. 125, No. 6, (2019), pp. 065105 (6 pages). <https://doi.org/10.1063/1.5066311>.
- [57] N. Benkara-Mohammed, N. Bioud and N. Benchiheb, " Hydrostatic pressure response of semiconducting GaSb applying a semi-empirical approach ", Computational Condensed Matter, Vol. 39, No.2, (2024), pp.e00895. <https://doi.org/10.1016/j.cocom.2024.e00895>.
- [58] R. Mezouar, N. Bioud, H. Rekab-Djabri, N. Beloufa and Z. Rouabah, "Theoretical prediction of mechanical properties of $\text{B}_x\text{Al}_{1-x}\text{Sb}$ ternary semiconducting alloys", Annals of West University of Timisoara-Physics, Vol. 64, (2022), pp. 22-36. <https://doi.org/10.2478/awutp-2022-0002>.
- [59] D. R. Clarke, "Materials selection guidelines for low thermal conductivity thermal barrier coatings ", Surface and Coatings Technology, Vol. 163-164, (2003), pp. 67–74. [https://doi.org/10.1016/S0257-8972\(02\)00593-5](https://doi.org/10.1016/S0257-8972(02)00593-5).
- [60] H. Xiang, Z. Feng, and Y. Zhou, "Theoretical investigations on mechanical anisotropy and intrinsic thermal conductivity of YbAlO_3 ", Journal of the European Ceramic Society, Vol. 35, No 5, (2022), pp.1549 –1557. <https://doi.org/10.1016/j.jeurceramsoc.2014.12.008>.
- [61] N. Lebga, S. Daoud, X-W Sun, N. Bioud and A. Latreche, "Mechanical and thermophysical properties of cubic rock-salt AlN under high pressure", Journal of Electronic Materials, Vol. 47, (2018), pp. 3430–3439. <https://doi.org/10.1007/s11664-018-6169-x>.
- [62] S. Daoud, "Comment on Structural phase transition, electronic and elastic properties in TiX (X = N, P, As) compounds: Pressure-induced effects", Computational Materials Science, Vol. 111, (2016), pp. 532 – 533. <https://doi.org/10.1016/j.commatsci.2015.09.022>.
- [63] J. W. Wafula, J. W. Makokha, and G. S. Manyali, "First-principles calculations to investigate structural, elastic, electronic and thermodynamic properties of NbCoSn and VRhSn Half-Heusler compounds", Results in Physics, Vol. 43, (2022), pp. 106132. <https://doi.org/10.1016/j.rinp.2022.106132>.
- [64] S. Daoud, "Linear correlation between Debye temperature and lattice thermal conductivity in II-VI and III-V semiconductors", International Journal of Scientific World, Vol. 3, No. 2, (2015), pp. 216 – 220. <https://doi.org/10.14419/ijsw.v3i2.4793>.