International Journal of Engineering & Technology, 7 (2.17) (2018) 1-4

International Journal of Engineering & Technology

Website: www.sciencepubco.com/index.php/IJET

Research Paper

Energy efficient enhanced tree structured compression model (ET-CM) for data aggregation in wireless sensor networks

Nandoori Srikanth*, M. Siva ganga prasad

Department of Electronics & Communication Engineering, KL University
**Email: srilovesnature@gmail.com*

Abstract

Compression, is a typical strategy to decrease information measure by taking care of information excess, can be utilized as a part of postpone delicate remote sensor systems (WSNs) to diminish end-to-end bundle delay as it can lessen parcel transmission time and conflict on the remote channel. All together for remote sensor systems to misuse flag, flag information must be gathered at a large number of sensors and must be shared among the sensors. Huge sharing of information among the sensors repudiates the prerequisites (vitality effectiveness, low inactivity and high exactness) of remote organized sensor. This paper manages the investigation of compressive proportion and vitality utilization in the system by contrasting and the current compressive strategies.

Keywords: *Comb needle model, Compressive sensing, Data distribution model, Energy consumption, clustering technique*

1. Introduction

Wireless Sensor Networks (WSN) comprise of a maybe vast number of remote sensor hubs ready to agreeably screen the natural or physical conditions, for example, temperature, mugginess, vibration, sound, weight, movement or positions. A remote sensor hub comprises of a processor, sensor, correspondence module controlled by a battery. Real issue in WSN is Power proficiency, since sensor hubs are commonly fueled by little batteries, which could not be with large charged batteries or recharged batteries [1]. Amid detecting, preparing and transmission, the vitality is devoured by the sensor hub. Be that as it may, very nearly 80% of the vitality is spent in the correspondence module for information transmissions in sensor organize. In this manner, control sparing can be by and large accomplished by diminishing radio correspondence through two methodologies: obligation cycling and in-arrange handling. Obligation cycling plans characterize facilitated rest/wakeup plans among hubs in the system. Then again, in-arrange preparing comprise of decreasing the measure of information to be transmitted by methods for pressure as well as collection systems [2]. By and large, information relationship contains two principle parts: spatial and fleeting connections. The two kinds of relationships can be used to evacuate excess information . Since a sensor hub is compelled by its leftover vitality and calculation ability, it is infeasible to perform excess expulsion calculation on each sensor hub. The group based approach offers a doable circulated answer for maintain a strategic distance from boundaries activated by confined assets, and accomplishes better load adjust when confronting huge information challenges[3].

There is wide research being developed of imaginative calculations for sensor arrangement, vitality effectiveness and impromptu directing with regards to WSN. As the calculations for remote sensor arrange created, they should a low-control, profoundly productive and versatile to different equipment platforms[4]. Setting up sensor arrange hubs in a genuine situation named as Sending Hubs may sent in settled destinations (deterministic position) or place them erratically (irregular position); dropping sensors from a plane; would be a case of arbitrary position. The scope plans can without much of a stretch be resolved in deterministic position rather in irregular arrangement. However in numerous organizations, it is either not viable or improbable to convey sensor hubs in a deterministic way [5].

We consider an extensive scale WSN made out of N sensors, haphazardly appropriated in a detecting zone to serve distinctive assignments, for example, constant natural observing. Sensor readings information are sent to a focal sink hub. We utilize a solitary jump transmission display for information gathering where we accept that every sensor hub knows its nearby directing structure. Because of the power utilization requirements, it is wasteful to specifically transmit the crude detected information to the sink, as they frequently display a high connection in the spatial space. As an outcome, they are effectively compacted to decrease control necessity.

2. Literature Survey

Energy consumption in WSNs is a widely studied issue, and a taxonomy of various categories of WSNs presented in this section. TiNA [8] utilized a proviso condition for indicating the varied extents, if the contrasted run is more noteworthy than the predefined go between any two esteems, at that point the contrasted result can be accounted for, generally disregarded. TiNA is more identified with our work, as we likewise utilized the RV capacity to discover TDRs between each two window put away wonders among the individual hubs, which is displayed in one of our current research work.

The creators of [6] proposed an another bunch based technique like CAG to fabricate a prescient model on CH hubs rather than singular sensor hubs and let the total computational weight on header hubs itself.

In [7], the creators show a strategy to construct prescient models for misusing the detected information connections by a couple of hubs. In such manner, hubs can be registered a model for the detected information until the point that a cushion is filled and transmits just the model parameters to the BS. In [8], the creators proposed a prescient transient excess model in information gathering, and utilized it for constant mistake rectification.

Ozdemir and Xiao [9] propose a respectability ensuring various leveled disguised information total plan. In this arrangement, the base station may order the accumulated information in view of key encryption. To Guarantee the secrecy the creators can utilize the calculation in view of elliptic bend cryptography. This encryption is probabilistic, so security against inactive assaults is guaranteed. Along these lines, this arrangement guarantees protection and trustworthiness between aggregators, yet presents a high correspondence and calculation.

Braginsky and Estrin,[10] utilizes an arrangement of extensive specialists to make ways that are coordinated towards the occasions they experience. Operators have a lifetime of a specific number of bounces (set by TTL documented) after they will bite the dust. At whatever point a specialist finds a way prompting an occasion that it has not gone over up to now, it makes a way state prompting this new occasion. At whatever point the steering table is refreshed, at that point the specialists discover the way which is shorter or better. A sensor hub does not create an inquiry unless it takes in a course to the required occasion.

Linoy et.al. researched the viability of information recuperation through the joint Compressive Detecting and Central Part Investigation in genuine Wireless Sensor Network arrangements. They proposed a novel system for the exact estimate of expansive genuine Wireless Sensor Networks motions through the gathering of a little portion of information focuses. The creator did not specify the need of bunching the information, since grouping or detecting information through an auxiliary tree will change the adequacy of the framework [11]. Some efficient cognitive radio techniques are also presented in [22].

3. Research Methodology

Energy efficient data aggregation in WSN can be achieved by proposed algorithm in comb-needle model. In this proposed method, it evaluates about the cluster based comb-needle model to identify the energy efficient data aggregation in WSNs. The proposed algorithm enhances cost effective data transmission, compressing ratio, and Energy consumption. On the other hand, enhanced data distribution model is also included in this proposed system, to eliminate hotspot issues in inter and intra block regions in the wireless sensor network.

3.1 Cluster based comb needle model

Reconstruction of signals from fewer samples is possible in Nyquist paradigm with Compressive sensing theories. Even sensing information is less, the recovery is exact. To get exact Recovery, Number of samples required is a characteristic which depends on particular reconstruction algorithm being used. Compressive Sensing can handles noise gracefully and reconstruction error is bounded for bounded perturbations in data. Sparsity and Incoherence are the two principles, which pertains to the signals of interest, and incoherence, which pertains to the sensing modality.

In Comb-Needle Model, the information sensed by the sensor nodes push into the space along with neighbor nodes data. The query is disturbed to those nodes based on the fixed space lines of the network. Therefore, the query procedure is normally based on the dynamical nature. It develops a comb- needle routing structure and then construct the needle-like data duplication structure that organizes a conceivable view of combining for needles in a haystack.

3.2 Enhanced data aggregation model

Aggregation tree construction and aggregation scheduling are the two phases of Data Aggregation model Scheduling algorithm. The basic idea behind data tree construction is breadth-first-search tree. There are two properties to design enhanced data aggregation model, those are (1) the depth of the tree is within a small constant factor of the diameter D(G), (2) Every internal node has to be connected with fixed number of other internal nodes. These properties schedule the data transmissions of internal nodes in fixed time-slots.

3.3 Construction of aggregation tree:

At first the spreading over tree with adjusted structure is work for the directing reason while BS (bunch head) is goes about as the root hub and all the CH hubs have same number of tyke. In the wake of getting information parcels from the kids hubs, each middle hub will total them with its own detected information. In our work we accept that all hubs utilize a settled pressure factor and create a steady measured information parcel. Progressively, the information parcels will be sent to the parent hub lastly the root hub (base station). It is perceptible that the root hub is likewise a sensor hub which can speak with the sink hub by single-bounce correspondence. It develop the traversing tree by finding most brief separation between two hubs in the bunch here the hubs of a tree thought about hubs as rising request of its weight. The base weight edge is inspire inclination to shape traversing tree, also begin from initiator hub MST is built by choosing least weight path(edge) to achieve sink hub.

3.4 Scheduling process:

The cluster head collects data from each node in terms of data frames, these data frames are generated by each node at the end of every period. The cluster head node or Relay node receives multiple data frames from each node and send it to Base station. If the relay node sends all these data frames to Base station at a time, there is a chance of high data traffic in the channel, and due to this performance of the network cannot be optimistic. In order to overcome the problem, the cluster head has to buffer the information and send them out after Tsyn in the next synchronization cycle. Inter layer and intra layer transmission schedules are implemented in this algorithm. Here layer means the hop count to sink.

Inter-layer scheduling is based on hop count H to the sink. Each relay node schedules the radio transceiver into transmitting mode by:

Trans(x) = D. (M mod N) +To

Where D is the scaling constant,

T0 is the starting time of the cycle,

N is a constant, which reduces the interference of simultaneous transmissions

4. Performance Analysis

For receiving a k-bit of information, the energy consumed by the sensor is represented with **Eelec* k**

For Transmitting a single data packet from sensor node ‘i’ to sensor node ‘j’ is given by

$$\mathbf{Tx(i,j) = Eelec*k + Eamp * d2(I,j) * k} \quad (1)$$

Where dij is the distance between nodes i and j

The energy spent for transmitting a single bit is given by

$$\mathbf{Etx(d)= Et1+Ed1*dn} \quad (2)$$

Table 1: Parameters used in performance analysis

SYMBOL	DESCRIPTION
Tmax sleep	Maximum sleep time
Tsample	Sample time
Psleep	Dissipated power during sleep mode
N	Number of nodes
A	Area of the network
Et1	Dissipated power for sending 1 bit of data
Ed1	Transmission power for a distance d

4.1 Compressive sensing:

Energy enhanced Comb needle model is proposed to meet the network sensibility with compression algorithms. Data aggregation and data manipulation are the important characteristics in wireless sensor networks. The proposed algorithm focuses on data compression and energy efficiency with security.

Table-1: Comparison of compressive techniques

Technique	Compression ratio
S-LZW	0.59
Run Length Encoding (K-RLE)	0.45
PEAGASIS	0.82
Enhanced tree structured compression model(ET-CM)	0.11

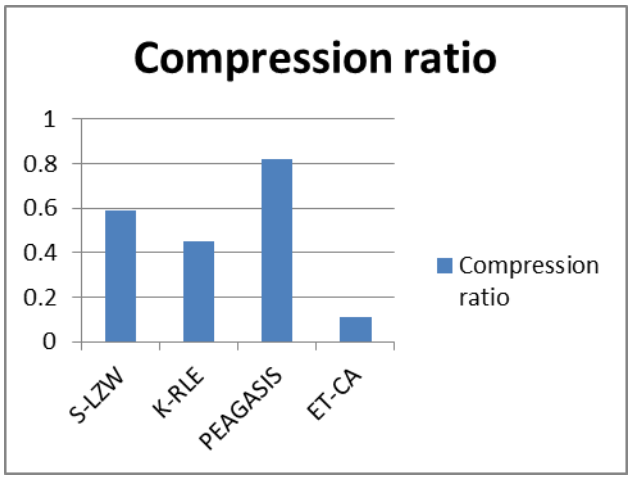


Figure-1 comparison of compressive ratio

4.2 Energy Estimation:

The Energy consumption in wireless sensor networks is an important metric to show first dead node. By improving the node density, the positions of the node relative to each other node may vary and results in change of the shortest path, distance of transmission and number of hops.

Table 2 Average energy consumption

Technique	Average Energy consumption
S-LZW	34%
Run Length Encoding (K-RLE)	29%
PEGASIS	43%
Enhanced tree structured compression model(ET-CM)	9%

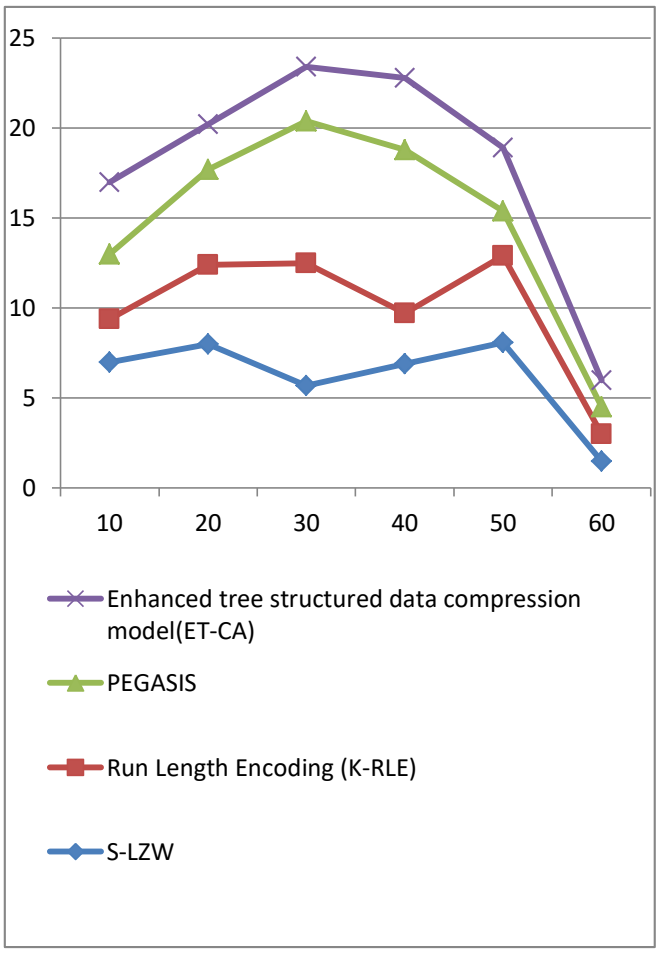


Figure2. Energy consumption between existing and proposed techniques

5. Conclusion

The Compression schemes performances in wireless sensor network have been analyzed in this paper. From the results the proposed algorithm makes the network more energy efficient, and does not affecting the sensing field. The proposed algorithm devides the sensing regions into blocks or clusters. The proposed data aggregation algorithm is applied for comb needle model, and obtained better results compared with existing techniques. The accurate estimation can be achieved by collecting some extra information from other nodes.

References

[1] GOUSSEVSKAIA, 0., OSWALD, Y , AND WATTENHOFER, R. Complexity in geometric SINR. In ACM MobiCom (2007) , pp. 100-109.

[2] GOUSSEVSKAIA, 0 ., W. R. H. M ., AND WELZL, E . Capacity of Arbitrary Wireless Networks. In IEEE INFOCOM (2009).

[3] KESSELMAN, A ., AND KOWALSKI, D. Fast distributed algorithm for convergecast in ad hoc geometric radio networks.

[4] XU, X.-H., WANG, S.-G., MAO, X.-F., TANG, S.-J., XU, P., AND LI, X.-Y. Efficient Data Aggregation in Multi-hop WSNs IEEE Globe Com 2009.

[5] YU, Y., KRISHNAMACHARI, B., AND PRASANNA, V. Energy-latency tradeoffs for data gathering in wireless sensor networks. In IEEE INFOCOM (2004), vol. 1

[6] A. De Paola, G. Lo Re, F. Milazzo, and M. Ortolani, “Predictive models for energy saving in wireless sensor networks,” in World of Wireless, Mobile and Multimedia Networks (WoWMoM), 2011 IEEE International Symposium on a, pp. 1–6, IEEE, 2011.

[7] S. Goel, A. Passarella, and T. Imielinski, “Using buddies to live longer in a boring world [sensor network protocol],” in Pervasive

Computing and Communications Workshops, 2006. PerCom Workshops 2006. Fourth Annual IEEE International Conference on, pp. 5–pp, IEEE, 2006

[8] S. Mukhopadhyay, C. Schurgers, D. Panigrahi, and S. Dey, "ModelBased Techniques for Data Reliability in Wireless Sensor Networks," IEEE Transactions on Mobile Computing, vol. 8, pp. 528–543, Apr. 2009

[9] D.Bramgomslu and D.Estrin,"Roumor Routing Algorithm For Sensor Networks,"Proc.First workshop Sensor Networks and Applications(WSNA'02),Oct,2002.

[10] Giorgio Quer, Riccardo Masiero, Gianluigi Pillonetto, Michele Rossi, and Michele Zorzi, ," Sensing, Compression, and Recovery for WSNs:Sparse Signal Modeling and Monitoring Framework" IEEE Transactions on wireless communications, Vol.11, No. 10, October 2012.

[11] Linoy A Tharakan , Dr. R Dhanasekaran Data compression in Wireless Sensor Network associated with a noble Encryption method using Quine-Mc Cluskey Boolean function reduction method International Journal of Applied Engineering Research, ISSN 0973-4562 Vol. 10 No.55 (2015)

[12] Wei Zhang, Sajal K. Das, and Yonghe Liu "A Trust Based Framework for Secure Data Aggregation in Wireless Sensor Networks", 3rd Annual IEEE Communications Society on Sensor and Ad Hoc Communications and Networks, 2006.

[13] Mousam Dagar and Shilpa Mahajan, "Data Aggregation in Wireless Sensor Network: A Survey", International Journal of Information and Computation Technology, Volume 3, Number 3, 2013. ISSN 0974-2239.

[14] Elena Fasolo, Michele Rossi, Jorg Widmer and Michele Zorzi, "A new In-network data aggregation technology of wireless sensor networks.", Proceedings of the Second International Conference on Semantics, Knowledge, and Grid (SKG'06) IEEE 2006.

[15] Pourazarm.S., & Cassandras.C, "Energy-based Lifetime Maximization and Security of Wireless Sensor Networks with General Non-ideal Battery Models", *IEEE Transactions on Control of Network Systems* vol. *15*, no. 9, pp. 5158-5168. 2012.

[16] Goyal.D, & Tripathy.M, "Routing protocols in wireless sensor networks: A survey", Advanced *Computing & Communication Technologies (ACCT),* Second International Conf. on pp. 474-480). IEEE, 2012.

[17] Liao.Y, Qi.H, & Li.W, "Load-balanced clustering algorithm with distributed self-organization for wireless sensor networks.", *IEEE sensors journal,* Vol No *13Issue No* 5, pp. 1498-1506, 2012.

[18] Yong.Z, & Pei.Q, "A energy-efficient clustering routing algorithm based on distance and residual energy for WSN",*Procedia Engineering,* Vol No *29*, pp. 1882-1888, 2012.

[19] W. Peng and X. Lu, "On the Reduction of Broadcast Redundancy in Mobile Ad Hoc Networks," Proc. ACM MobiHoc, 2000.

[20] A. Qayyum, L. Viennot, and A. Laouiti, "Multipoint Relaying: An Efficient Technique for Flooding in Mobile Wireless Networks," Research Report RR-3898, INRIA, Feb. 2000, citeseer.nj.nec.com/ qayyum00multipoint.html.

[21] S.-Y. Ni, Y.-C. Tseng, Y.-S. Chen, and J.-P. Sheu, "The Broadcast Storm Problem in a Mobile Ad Hoc Network," Proc. Fifth Ann. ACM/IEEE Int'l Conf. Mobile Computing and Networking, pp. 152162, Aug. 1999.

[22] Shaik Yasmin Fathima, Md. Zia Ur Rahman, K. Murali Krishna, Shakira Bhanu,Mirza Shafi, "Side Lobe Suppression in NC-OFDM Systems Using Variable Cancellation Basis Function", IEEE Access, vol.5, no.1, pp. 9415-9421, 2017.