International Journal of Engineering & Technology, 7 (3) (2018) 1154-1156

International Journal of Engineering & Technology

Website: www.sciencepubco.com/index.php/IJET
doi: 10.14419/ijet.v7i3.12602
Research paper

Monophonic wirelength on Circulant Networks

K. Uma Samundesvari[1]*, Sindhuja G. Michael [2]

[1]*Assistant Professor, Department of Mathematics, Noorul Islam Center for Higher Education, Thuckalay-629 180, Kanyakumari,India*
[2]*Assistant Professor, Department of Mathematics, Ponjesly College of Engineering, Nagercoil, 629003, India*
**Corresponding author E-mail:kuskrishna@gmail.com*

Abstract

In this paper, we define the monophonic embedding of graph *G* into graph *H* and we present an algorithm for finding the monophonic wirelength of circulant networks into the family of grids $M(n\times 2)$, $n\geq 2$.The monophonic embedding of a graph *G* into a graph *H* is an embedding denoted by f_m is a bijective map from the vertex set of *G* into the vertex set of *H* and f_m is a one-one mapping from the edge set (*x, y*) of *G* into $P_m(H)$ where $P_m(H)$ is the set of monophonic paths between $f_m(x)$ and $f_m(y)$ for every $f_m(x), f_m(y) \in H$. The monophonic wirelength of f_m of *G* into *H* is the sum of distances of monophonic paths between two vertices $f_m(x)$ and $f_m(y)$ in *H* such that $(x, y)\in E(G)$. This paper presents a monophonic algorithm to find the monophonic wirelength of circulant networks $G(2n, \pm S)$, where $S\subseteq \{1,2,3,\ldots,n\}$ into the family of grids $M[n\times 2], n\geq 2$. We also derived a Lemma to get the monophonic edge congestion *MEC(G,H)*.

Keywords: *Circulant Networks; Edge Congestion; Grid; Monophonic Distance; Wirelength.*

1. Introduction

The distance d(x, y) between two vertices x and y in a graph G is the length of the shortest path from x to y in G . An edge x_ix_j is a chord of a path $x_0,x_1,x_2,\ldots,x_n$ if $j \geq i+2$. A monophonic path is a path if it contains no chord. The length of the longest x-y monophonic path of a graph G is called the monophonic distance $d_m(x,y)$ for every vertices x,y in G. A monophonic path from x to y with length $d_m(x,y)$ is called an x - y monophonic "as stated in [1,2,3,4]". Consider a graph H, since other graphs or networks are embedded into it , as host graph and graphs or networks which are embedded in H are called guest graph "as given in [5,6,7]". Let G(V,E) and H(V,E) be finite graphs with n vertices. An embedding f of G into H is defined as follows:

1) f is a bijective map from V (G) → V (H)
2) f is a one-to-one map from E(G) to {P_f (f (u), f (v)) : P_f (f(u), f(v)) is a path in H between f (u) and f (v) for (u, v) ∈E(G)} "as defined in [8,9]. i.e., The embedding f of G to H is a bijective mapping from the vertex set of G to the vertex set of H and every edge (u, v) ∈ E(G) is mapped to a path between f (u) and f (v) in H. The edge congestion of an embedding f of G into H is the maximum number of edges of the graph G that are embedded on any single edge of H. The wirelength of an embedding f of G into H is given by

$$WL_f(G,H) = \sum_{(u,v)\in E(G)} d_H(f(u), f(v)) = \sum_{e\in E(H)} EC_f(G, H(e)) \quad (1)$$

If we find an embedding of G into H which produces the minimum wirelength WL(G, H), such problem is called the wirelength problem "as stated in [9]". We use definitions, Lemmas and Theorems from [1], [2], [5], [6], [7], [8] and [9] for this work.

2. Monophonic wirelength problem

Definition 2.1: *Let G(V, E) and H (V, E) be finite graphs with n vertices. An embedding f_m: G → H is called a monophonic embedding if f_m maps each vertex of G into a vertex of H and each edge (x, y) of G is mapped to a monophonic path between $f_m(x)$ and $f_m(y)$ in H.*

Definition 2.2: *Let f_m: G → H be a monophonic embedding. The monophonic edge congestion of f_m of G into H is the maximum number of edges of the graph G that are embedded on an edge e∈H and is given by*

$$MEC_{f_m}(G,H) = \max MEC_{f_m}(G, H(e)) \quad (2)$$

The monophonic wirelength problem of a graph G into H is the problem of finding a monophonic embedding f_m : G→ H that produces the monophonic wire length MW L(G, H).

Definition 2.3: *Let f_m: G → H be a monophonic embedding. The monophonic wirelength MWL (G, H) of f_m is given as*

$$MWL_{f_m}(G,H) = \sum_{(x,y)\in E(G)} d_m(f_m(x), f_m(y)) \quad (3)$$

Proposition 2.4: *For embeddings f : G → H and the monophonic embeddings f_m: G → H, WL_f (G, H) ≤ MWL_{fm}(G,H)*

Proof: From Lemma 2.3 "as proved in [2]", we have

$$\sum_{(x,y)\in E(G)} d_H(f(x), f(y)) \leq \sum_{(x,y)\in E(G)} d_m(f_m(x), f_m(y)) \quad (4)$$

And using definitions "as defined in [9]" we write,

Copyright © 2018K. Uma Samundesvari, Sindhuja G. Michael. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

$$WL_f(G,H) = \sum_{(x,y)\in E(G)} d_H(f(x), f(y)) = \sum_{e\in E(H)} EC_f(G, H(e)) \le \sum_{(x,y)\in E(G)} d_m(f_m(x), f_m(y)) = MWL_{f_m}(G,H) \quad (5)$$

Therefore,

$$WL_f(G,H) \le MWL_{f_m}(G,H) \quad (6)$$

Lemma 2.5: *(Monophonic congestion Lemma)Let G be an r-regular graph with n vertices. Let H be a finite graph with n vertices. Let f_m: G → H be a monophonic embedding of G into H. Let the graph H \ E_j, j = 1,2,…,p; 0<p≤|E(G)| , have the components H_i ,i =1,2 and $G_i = f_m^{-1}(H_i)$,where E_j's are the edge cuts of H, form a partition in H and have the following properties:*

i) For m≥0, there are m edges (x, y) ∈G_i, i = 1, 2; such that the monophonic path $P_{f_m}(f_m(x), f_m(y))$ has exactly two edges in E_j.

ii) The monophonic path $P_{f_m}(f_m(x), f_m(y))$ has exactly one edge in E_j for every (x,y)∈ G with x∈ G_1& y∈G_2 where G_1 is the maximum subgraph in G. Then $MEC_{f_m}(E_j)$ is monophonic and the monophonic wirelength of f_m of G into H is given by

$$MWL_{fm}(G,H) = \sum_{j=1}^{p} MEC_{fm}(E_j) \quad (7)$$

Where, $MEC_{fm}(E_j) = r|V(G1)| - 2|E(G1)| + 2,\ m \ge 0.$

Proof: As E_j , j = 1,2,…,p are edge cuts of H, $E_j = \{(u,v) \in E(H); u \in H_1, v \in H_2\}$. Let $T = \{(x,y) \in E(G); x \in G_1, y \in G_2\}$. Since there are 'm' edges (x,y) ∈ G_i, i = 1,2; the monophonic path $P_{f_m}(f_m(x), f_m(y))$ in H has exactly two edges in E_j. Therefore, the monophonic edge congestion is increased by 2m from the edge congestion of E_j. Also the monophonic path $P_{f_m}(f_m(x), f_m(y))$ in H has exactly one edge in E_j for every (x,y)∈G with x∈G_1 and y∈G_2. Hence $MEC_{f_m}(E_j) = |T + 2m|$.

Where |T| = r |V (G_1)| −2 |E (G_1) by Lemma 2 in [9].
Therefore, EC_{fm} is monophonic as G_1 is maximum in G. The edge cuts E_j, j = 1, 2, p form a partition in H. Thus, we write

$$MWL_{fm}(G,H) = \sum_{j=1}^{p} MEC_{fm}(E_j) \quad (8)$$

3. Monophonic wirelength on circulant networks

Definition 3.1:*A circulant undirected graph denoted by G(n, ±S) where S⊆ {1,2,3,…,[n/2]} ,n ≥3 is defined as a graph consisting of the vertex set V ={0,1,2,…,n-1} and the edge set E={ (i,j) : |i-j|≡s(mod n), s∈S} " as defined in [5]".*
To present the monophonic wirelength on circulant networks, we consider the monophonic embedding f_m from the circulant graph G[2n, ±S], S⊆ {1, 2, 3… n}, into the grid M (n×2), n ≥2.

3.1. Monophonic algorithm

Consider the monophonic embedding f_m : G[2n, ±S]→M [n×2]. Let V(G [2n, ±S]) = {0, 1, 2… 2n-1} and these vertices are labeled as the vertices of a cycle in clockwise.Let V(M [n×2]) = {0, 1, 2… 2n-1}, these vertices are named as follows

- In Column 1 of M [n×2] the vertices {0, 1, 2… n-1} are named in an ascending order from the top.
- In Column 2 of M [n×2] the vertices {n, n+1…, 2n-1} are named in an ascending order from the top.

Lemma 3.2:*For n ≥2, the rows of the grid M[n×2] is defined as R_i = {i-1, n+i-1} ; i = 1,2,…,n are maximum subgraphs in G[2n;{1,2,…,n}].*
The proof holds by Theorems 3.3 and 3.4 "as proved in [6]".

Lemma 3.3:*For j = 1,and n ≥ 2, the column of the grid M[n×2] is given by C_j ={0,1,2,…,n-1}, which is maximum in G[2n;{1,2,…,n}].*
The proof follows from Theorem 3.3 and 3.4 "as proved in [6]".

Theorem 3.4:*Let f_m : G[2n, ±S] →M [n×2] be a monophonic embedding. For n ≥ 2, the wirelength of G[2n,±S], S⊆ { 1, 2…, n} into M [n×2] induced by f_m is monophonic.*

Proof: Let A_{i1} and A_{i2} be the components of M[n×2] \ H_i , H_i be the horizontal edge cut of the grid M[n×2] .Then the vertex set of A_{i1} is the rows of the component A_{i1}. (ie) V(A_{i1}) is R_i ,i =1,2,…,2n-1. Refer Figure 1(a). Let B_{j1} and B_{j2} be the components of M [n×2] \ W_j,W_j be the vertical edge cut of the grid M [n×2]. Then the vertex set of B_{j1} is C_j, j = 1. Under f_m let $G_{i1} = f_m^{-1}(A_{i1})$ and $G_{i2} = f_m^{-1}(A_{i2})$. Since the horizontal edge cuts satisfy the properties stated in Lemma 2.5 and are maximum in G, $MEC_{f_m}(H_i)$ is monophonic for i=1,2,…2n-1. For this see Figure 1(b). Let $G_{j1} = f_m^{-1}(B_{j1})$ and $G_{j2} = f_m^{-1}(B_{j2})$. Moreover the vertical edge cut W_j satisfies the properties stated in Lemma 2.5. Also by Lemma 3.3, G_{j1} is a maximum sub graph induced by the vertices of C_j, j = 1. Hence by Lemma 2.5, $MEC_{f_m}(W_j)$ is monophonic for j=1.Thus $MEC_{f_m}(G,H)$ is monophonic.

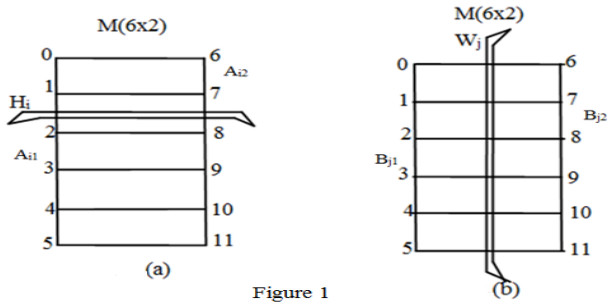


Figure 1

Fig. 1:(a) Each $H_i$is an edge cut of the grid on M [6×2] which disconnects M [6×2] into two components $A_{i1}$and A_{i2} where V (A_{i1}) Is R_i. (b) Each $W_j$is an edge cut of the grid on M[6×2] which disconnects M [6×2] into two components $B_{j1}$and B_{j2} where V (B_{j2}) is C_j.

Theorem 3.5:*The monophonic wirelength of an r-regular graph G with 2n vertices into the grid M[n×2], n≥2 is given by MWL(G, M[n×2]) = WL (G, M [n×2]) +2m*

Proof: Let f_m : G → M [n×2] be a monophonic embedding. Since each edge (x, y) of G is mapped to a monophonic path between f_m(x) and f_m(y) in M[n×2], the edges of G are transformed into edges vertically or horizontally in M[n×2].Therefore there exists horizontal edge cuts H_i , i= 1,2,…,2n-1 in M[n×2]. As there are no monophonic paths $P_{f_m}(f_m(x), f_m(y))$, for every (x, y)∈G_i, i = 1, 2; having edges in H_i , the monophonic edge congestion of H_i is equivalent to the edge congestion of the edges of H_i .Also there exists a vertical edge cut W_j , j = 1. For m ≥ 0, there are m edges

$(x,y) \in G_i$, i = 1, 2; the monophonic paths $P_{f_m}(f_m(x), f_m(y))$ have exactly two edges in W_j and so the monophonic edge congestion of the edges of $W_j$is increased by 2m from the edge congestion of the edges of W_j. Hence the monophonic wirelength of each row equals the wirelength of each row of M[n×2] and the monophonic wirelength of each column differs by 2m from the wirelength of columns of M[n×2].
Therefore MWL(G,M[n×2]) = WL(G,M[n×2])+2m

Theorem 3.6:*MWL(G[2n,±1] , M[n×2])= WL(G[2n,±1], M[n×2])= 2(2n-1).*
Proof: As there is no edge (a ,b) $\in G_i$, i = 1, 2; the monophonic path $P_{f_m}(f_m(a), f_m(b)) \in M[n\times2]$ has exactly two edges in E_j , m=0. Therefore, the result follows from Theorem 3.5.

4. Monophonic embedding algorithm

4.1. Aim

To find a monophonic embedding $f_m : G \rightarrow H$ that produces the monophonic wirelength $MWL_{f_m}(G,H)$, where G is the family of circulant graph with 2n vertices of r-regular and H is the family of grid M[n×2],n ≥ 2.

4.2. Monophonic algorithm

i) Label the vertices of G[2n,{1,2,3…,n-1}] as a cycle from 0,1,2,…,2n-1
ii) Label the vertices of M[n×2] as follows:
- In Column 1 of M [n×2] the vertices {0, 1, 2, n-1} are labeled in an ascending order from the top.
- In Column 2 of M [n×2] the vertices {n, n+1…, 2n-1} are labeled in an ascending order from the top.

Case (i): Input:
Pre-image: The family of circulant graph G[2n,{1, 2, n-1}], n ≥2.
Image: The family of grids M[n×2] n ≥ 2.
Output: A monophonic embedding f_m of G[2n,{1,2,3…,n-1}] into M(n×2) given by $f_m(x) = x$ with monophonic wire length MWL(G[2n,{1,2,3,…,n-1}] , M[n×2]) = WL+2(n-1)(n-2) ,n≥2.
Case (ii): Input:
Pre-image: The family of circulant graphs G[2n,{1, 2, n-2}], n ≥ 3.
Image: The family of grids M[n×2], n≥ 3.
Output: A monophonic embedding f_m of G[2n,{1,2,3…,n-2}] into M[n×2] given by $f_m(x) = x$ with monophonic wire length MWL(G[2n,{1,2,3,…,n-2}], M[n×2]) = WL+2n(n-3) ,n≥3.
Case (iii): Input:
Pre-image: The family of circulant graphs G[2n,{1, 2,…, n-4}], n ≥ 5.
Image: The family of grids M[n×2],n ≥ 5.
Output: A monophonic embedding f_m of G[2n,{1,2,3…,n-4}] into M[n×2] given by $f_m(x) = x$ with monophonic wire length MWL(G[2n,{1,2,3,…,n-4}], M[n×2]) = WL+2(n+2)(n-5) ,n≥5.
Case (iv): Input:
Pre-image: The family of circulant graphs G [2n, {1, 2, …,n}], n ≥2.
Image: The family of grids M [n×2], n ≥ 2.
Output: A monophonic embedding f_m of G[2n,{1,2,3…,n}] into M[n×2] given by $f_m(x) = x$ with monophonic wire length MWL(G[2n,{1,2,3,…,n}], M[n×2]) = WL+2(n-1)(n-2) ,n≥2.
Proof: For all the above Cases (i) to (iv), using Theorem 3.4, the mapping f_m is monophonic and by Theorem 3.5, the results follows.

5. Conclusion

In this paper, we applied the monophonic idea on graph embedding *f* of two graphs from G into H. Using this concept; we have obtained a modified result in the wirelengthproblem, which does not exist. A new technique was found from the existing one. We have taken all possible family of circulant networks under study and applied the monophonic algorithm on *f* and based on the statistical data we obtained we came to the conclusion which yields the above findings.

References

[1] Buckley F &Harary F, "Distance in Graphs", *Addison-Wesley*, Redwood City, CA, (1990).
[2] Santhakumaran AP & Titus P, "Monophonic distance in graphs", *Discrete Math, Algorithms and Appl*., Vol.3, No.2, (2011), pp.159-169.https://doi.org/10.1142/S1793830911001176.
[3] Maya P & Nicholas T, "Some Results on Integer Edge Cordial Graph", *DJ Journal of Engineering and Applied Mathematics*, Vol.3, No.1, (2017), pp.1-2.https://doi.org/10.18831/djmaths.org/2017011001.
[4] Mathew J, "Subdivided Stars Super (b, d)-Edge-Antimagic Total Graph Labelling", *DJ Journal of Engineering and Applied Mathematics*, Vol.1, No.1, (2015), pp.30-34.https://doi.org/10.18831/djmaths.org/2015011005.
[5] Rajasingh I, Manuel P, Arockiaraj M &Rajan B, "Embeddings of Circulant networks", *Journal of Combinatorial Optimization*, Vol.26, No.1, (2011), pp.135-151.https://doi.org/10.1007/s10878-011-9443-x
[6] Quadras J & Surya SS, "Linear wirelength of circulant networks", *International Journal of Pure and Applied Mathematics*, Vol.86, No.6, (2013), pp.883-891.
[7] Arokiaraj M, Manuel P, Rajasingh I &Rajan B, "Wirelength of 1-fault Hamiltonian graphs into wheels and fans",*Information Processing Letters*, Vol.111, (2011) pp.921–925.https://doi.org/10.1016/j.ipl.2011.06.011
[8] .Bezrukov SL, Chavez JD, Harper LH, Rottger M & Schroeder UP, "Embedding of hypercubes into grids", *MFCS, Electronic Edition Springer, Lecture Notes in Computer Science*, No.1450, (1998), pp.693-701.https://doi.org/10.1007/BFb0055820.
[9] Manuel P, Rajasingh I, Rajan B & Mercy H, "Exact wirelength of hypercube on a grid", *Discrete Applied Mathematics*, Vol.157, No.7, (2009), pp.1486 - 1495.https://doi.org/10.1016/j.dam.2008.09.013.