International Journal of Engineering & Technology, 7 (3.15) (2018) 11-15

International Journal of Engineering & Technology

Website: www.sciencepubco.com/index.php/IJET

Research paper

Fitting Conventional Neural Network Time Series Models on Sand Price Indices Dataset

Nor Azura Md Ghani[1]*, Saadi Bin Ahmad Kamaruddin[1], Ismail Musirin[2], Hishamuddin Hashim[3]

[1]Center for Statistical Studies and Decision Sciences, Faculty of Computer and Mathematical Sciences, Universiti Teknologi MARA,40450 Shah Alam, Selangor, Malaysia
[2]Faculty of Electrical Engineering, Universiti Teknologi MARA, Shah Alam, Selangor Darul Ehsan, Malaysia
[3]Pilihsepakat Sdn. Bhd., Lot 5431, Tingkat 1(B), Jalan J9, Fasa 6, Taman Melawati, Kuala Lumpur, Malaysia
**Corresponding author E-mail: azura@tmsk.uitm.edu.my*

Abstract

This result-based paper discusses on the best aftereffects of both fitted BPNN-NAR and BPNN-NARMA on MCCI Sand dataset regarding distinctive error measures. This exploration examine the outcomes as far as the execution of the fitted forecasting models by every arrangement of input lags and error lags utilized, the execution of the fitted anticipating models by various hidden nodes utilized, the execution of the fitted estimating models when joining both inputs and hidden nodes, the consistency of error measures utilized for the fitted determining models, and in addition the general best fitted estimating models for Malaysian sand price indices dataset. In this examination, Malaysian sand price indices monthly data from January 1980 to December 2013 were adapted. The examination of BPNN-NAR on Malaysian sand data shows that insufficient or inadequate combination of input and error lags lead to greater RMSE. Correspondingly, the number of input lags for BPNN-NAR, as well as the number of input and error lags for BPNN-NARMA really have direct effect to the models' performances. The higher or the lesser hidden nodes to the input lags, the higher the network's RMSE. On the other hand, the higher the input lags lead to the higher network's RMSE.

Keywords*: Neural Network; Conventional Nonlinear Autoregressive (NAR); Conventional Nonlinear Autoregressive Moving Average (NARMA); Sand Price Indices*

1. Introduction

As indicated by [1], input slacks alone may not be satisfactory to absolutely harsh the fundamental time series process. He included that one slack can't catch the fundamental relationship or not adequate to show a procedure, in this manner there is a need of satisfactory number of shrouded neurons for ideal system execution. The two sources of info and shrouded hubs can fundamentally influence the learning of a neural system when anticipating a period arrangement. This examination is keen on exactness of the models rather than stingy time arrangement models, as recommended by [2]. For time arrangement, inputs likewise incorporate slacks. As the information dimensionality builds, display intricacy increments and learning turns out to be more troublesome, prompting poor joining. The test here is to choose or locate the best blends of information slacks with sufficient number of concealed hubs that will prompt a predominant model, particularly to a specific dataset of a specific situation. On the off chance that the preparation set is adequately vast, ANN will sum up precisely and will deliver exact yields for inputs not in the preparation set. At the point when neural systems are legitimately prepared, they can sum up and extrapolate extra subtle elements of the capacity mapping the contributions to yields. All things considered, no earlier presumptions of needy and autonomous factors should be made since the neural system is prepared on watched information [3, 4]. This construes neural frameworks are usually utilized as "discovery" gadgets that is no prior data about the strategy was accepted; the objective was to build up a procedure demonstrate construct just with respect to perceptions of its information yield conduct [5, 6, 7]. By definition, the black-box is a demonstrating strategy that builds the model simply in light of the data picked up from the structure, and it doesn't rely upon other data about the framework [8]. No early assumptions about the model structure are made, and rather, the demonstrating method's worry is to make a non specific model that maps the data yield relationship of the dataset [9, 10]. Disclosure models are known to be suitable and adaptable, as the aide data about the framework may not be speedily open. From this examination, one deficiency lies in the way that that the model multifaceted nature grows [7] Also, another great position of the discovery distinguishing proof is that it can show stream that are deficiently gotten by numerical models [12, 13].

2. Methodology

In this examination, Malaysian sand price indices monthly data from January 1980 to December 2013 were adapted. These datasets are auxiliary information gathered from three unique sources, UKAS, from Malaysian Prime Minister's Office, Malaysian CIDB, and Malaysian Statistical Department. In this exploration, just Malaysian focal locale total value records were adjusted which involve 0% exceptions. The aggregate N=408 (a year x 34 years) from January 1980 to December 2013 (base 1980=100).
As a matter of first importance, this examination talks about the execution of the fitted estimating models on Malaysian total Price lists information by each arrangement of info slacks and mistake slacks utilized. Table 1 indicates execution aftereffects of fitted

Copyright © 2018 Authors. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

anticipating models of two-layer tansig/direct exchange works on Malaysian sand Price records information. For examination purposes, this exploration utilized information slacks from 5 to 40 and concealed hubs from 5 to 45 for BPNN-NAR show, while for the BPNN-NARMA display, this exploration utilized the mistake slacks going from 5 to 40, together with input slacks from 5 to 40 and concealed hubs from 5 to 45. The most widely recognized way to deal with choose this property is experimentation or experimentation [14, 15, 16], though extraordinary systems (dependable guideline) and calculations (pruning and developing) are also available [17, 18, 19]. It is to be seen that BPNN-NAR is a feed-forward neural system write demonstrate, while BPNN-NARMA is an intermittent neural system compose display [18]. This investigation reports the blunder measures on the test dataset, which is the most key trademark, mirroring ANN's speculation capacity [19, 20]. Table 2 demonstrates the information parceling for organize pre-handling. Figure 1 demonstrates the flowchart of the BPNN-NAR and BPNN-NARMA.

3. Research Findings

As a matter of first importance, this examination talk about the execution of the fitted determining models on Malaysian sand Price indices data by every arrangement of input lags and error lags utilized. Figure 2 demonstrates the execution of BPNN-NAR as for input lags and hidden nodes on Malaysian sand Price indices data in view of RMSE. Then again, Figure 3 demonstrates the execution of BPNN-NARMA as for input lags and hidden nodes on Malaysian sand Price indices data in light of RMSE. Not the same as the outcomes with Malaysian total data, it can be watched that the general lines of BPNN-NARMA are more towards the focal point of zero qualities, which means zero error contrasted with BPNN-NAR. In view of RMSE aftereffects of Malaysian Sand data, this examination can see that both BPNN-NAR and BPNN-NARMA models on Malaysian Sand data create much littler errors.

In view of input and error lags 5, the ideal number of hidden nodes was 20. In light of input and error lags 10, the ideal number of hidden nodes was 10. In view of input and error lags 15, the ideal number of hidden nodes was 15. In light of input and error lags 20, the ideal number of hidden nodes was 30. In light of input and error lags 25, the ideal number of hidden nodes was 25. In view of input and error lags 30, the ideal number of hidden nodes was 35. In view of input and error lags 35, the ideal number of hidden nodes was 35. In view of input and error lags 40, the ideal number of hidden nodes was 45.

In view of these outcomes, BPNN-NARMA display performed superior to the BPNN-NAR show. This is parallel with the discoveries of [21], even many works have demonstrated that the BPNN-NARMA show beat BPNN-NAR display [22-24].

Table 1: Combinations of Input Lags, Error Lags and Percentage of Outliers for BPNN - NAR and BPNN - NARMA Models

Data Type	Notation	Outliers	ANN Models			Hidden Nodes
			NAR	NARMA		
			Input Lags	Input Lags	Error Lags	
Monthly Malaysian Sand Price Indices Data	Sand	0%	5, 10, 15, 20, 25, 30, 35, 40	5, 10, 15, 20, 25, 30, 35, 40	5, 10, 15, 20, 25, 30, 35, 40	5, 10, 15, 20, 25, 30, 35, 40, 45

Table 2: Size of Data Partitioning for Training, Validation and Testing Sets for Each Data Used in This Research

Data Type	Total Sample Size (N)	In-sample Data		Out-of-sample Data
		Training (70%)	Validation (15%)	Testing (15%)
Sand	408	286	61	61

It is immovably trusted that the reason of this finding because of non-presence of anomaly issue in the data. In a book entitled 'Nonlinear framework distinguishing proof: from traditional ways to deal with neural systems and fluffy models' by [25], it is said that the neural system perform well when the data don't comprise of anomalies.

By and large, as the quantity of input and error lags expanded, the errors are likewise expanded. From this exploration, if the system is given sufficient hidden nodes, it might surmised the data well.

The best outcomes for this area in view of RMSE can be abridged in Table 3. In conclusion, this exploration may reason that the best fitted model for Malaysian sand Price indices data was the two-layer tansig/direct exchange capacities BPNN-NARMA show with 10-10-20 designs (RMSE=0.119, MSPE=0.014, MAPE=11.284, MAD=0.087, and GRMSE=0.317).

4. Conclusions

The examination of BPNN-NAR on Malaysian sand data shows that insufficient or inadequate combination of input and error lags lead to greater RMSE. Correspondingly, the number of input and error lags really have direct effect to the network's RMSEs. The higher or the lesser hidden nodes to the input lags, the higher the RMSE. On the other hand, the higher the input lags lead to the higher network's RMSE. Among the earliest attempts are [26-27]. From the results, obviously that there is no need to adjust NAR and NARMA models when handling data with zero outliers problem. However, there is a need to modify NAR and NARMA models so that they may handle outliers issue effectively, or else the development of NAR model to NARMA demonstrate should not be proceeded since the NARMA model will tend convey greater mistakes, and the results are not strong for additionally use [28-36].

Table 3: Best Results of Ordinary BPNN-NAR and BPNN-NARMA Models on Malaysian Aggregate Price Indices Data based on Different Lags

Input Lags	Error Lags	Hidden Nodes	RMSE	
			ANN Models	
			BPNN-NAR	BPNN-NARMA
5	5	20	0.146	0.120
10	**10**	**10**	0.123	**0.119**
15	15	15	0.152	0.124
20	20	30	0.161	0.130
25	25	20	0.168	0.135
30	30	35	0.175	0.139
35	35	35	0.165	0.135
40	40	45	0.141	0.124

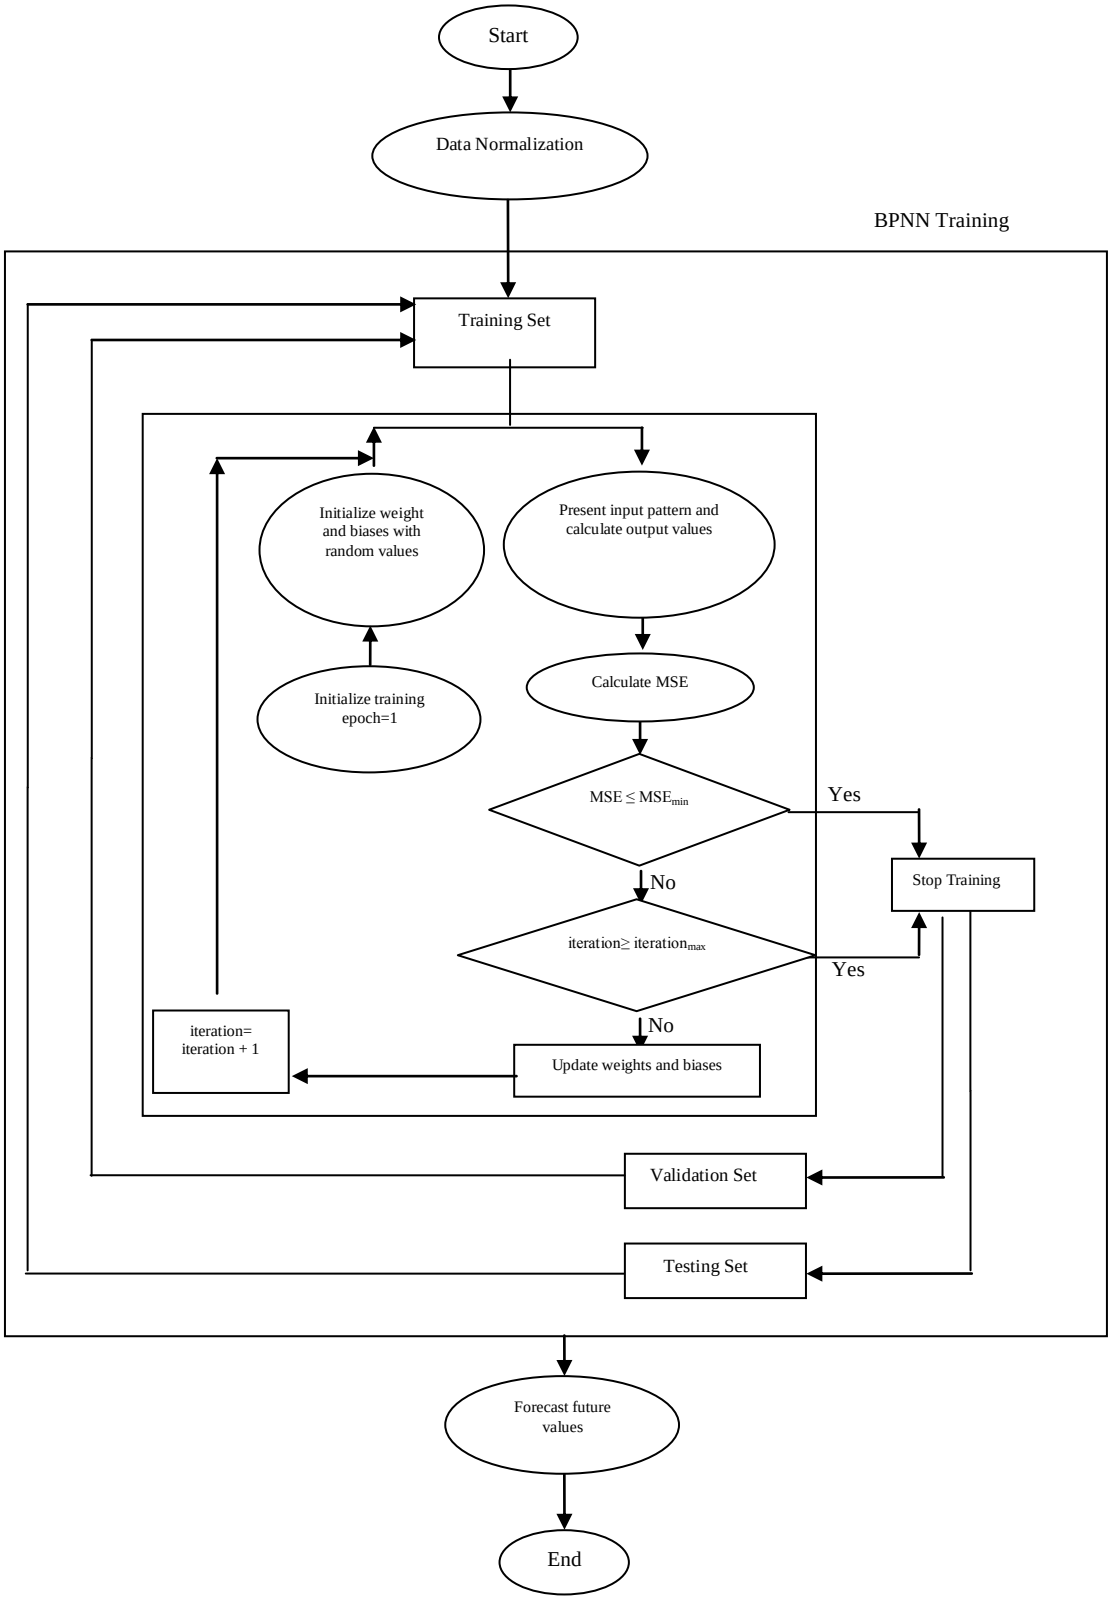


Fig. 1: Flowchart of Backpropagation Conventional Neural Network BPNN-NAR and BPNN-NARMA Mechanism

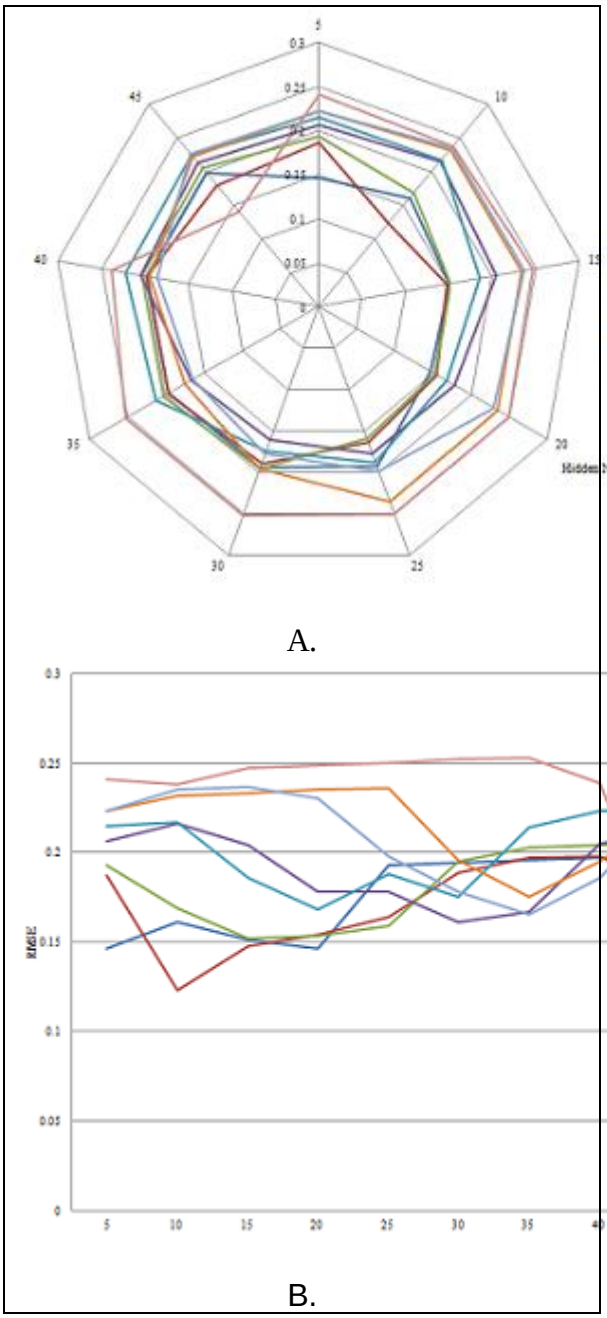


Fig. 2: Performance of BPNN-NAR with Respect to Input Lags and Hidden Nodes on
Malaysian Sand Price Indices Data based on RMSE

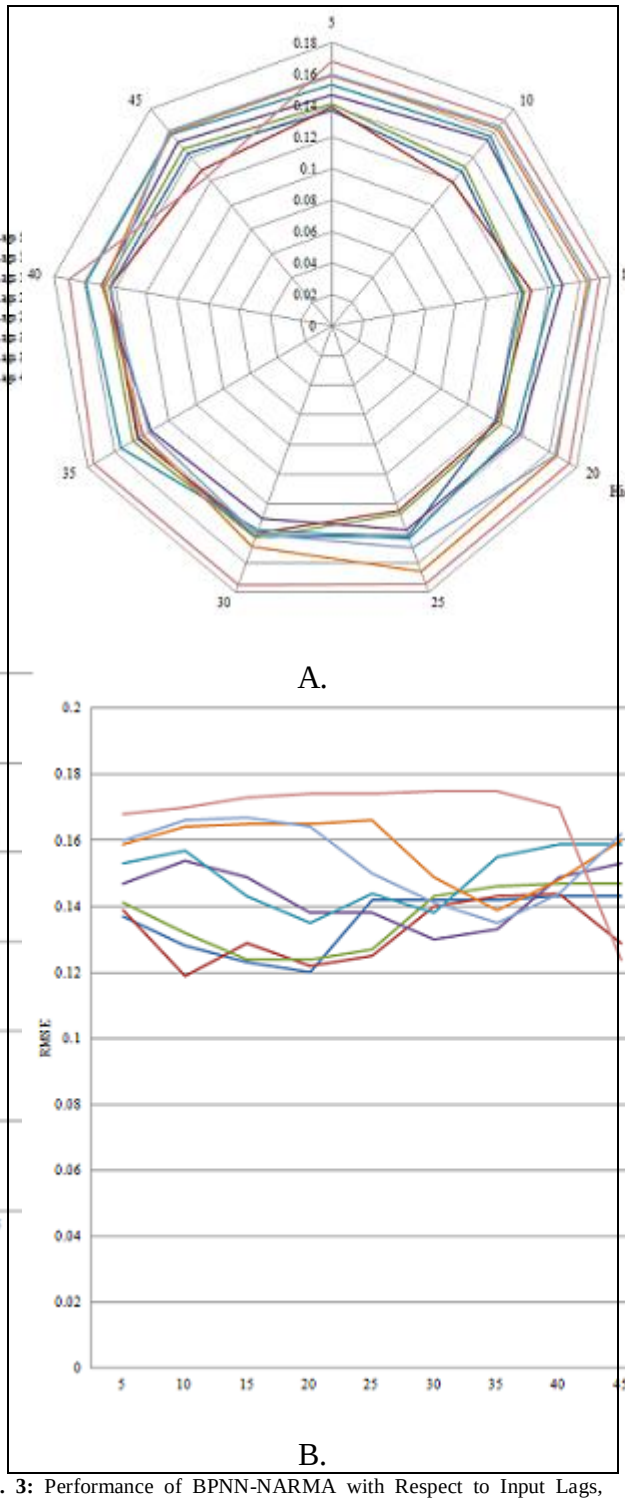


Fig. 3: Performance of BPNN-NARMA with Respect to Input Lags, Error Lags and Hidden Nodes on

Malaysian Sand Price Indices Data based on RMSE

Acknowledgement

We want to express our gratefulness and appreciation to Unit Kerjasama Awam Swasta (UKAS) over Prime Minister's Office, Construction Industry Development Board (CIDB) then Malaysian Statistics Department. Appreciation to Universiti Teknologi MARA for financial support under the Grant Scheme No. 600-RMI/DANA 5/3/CIFI (65/2013).

References

[1] Samarasinghe, S. (2006). Neural networks for applied sciences and engineering: from fundamentals to complex pattern recognition. CRC Press

[2] Zhang, G. P. (2004). Business forecasting with artificial neural networks: An overview. *Neural networks in business forecasting*, 1-22.

[3] Kim, D. (2001). Neural Networks for Trip Generation Model. *Journal of the Eastern Asia Society for Transportation Studies*, *4*(2), pp. 201-208.

[4] Ghosh, S. & Konar, A. (2012). Call Admission Control in Mobile Cellular Networks (Vol. 437). Springer.

[5] Qiu, F. & Jensen, J. R. (2004). Opening the black box of neural networks for remote sensing image classification. *International Journal of Remote Sensing*, 25(9), pp. 1749-1768.

[6] Heinert, M. (2008). Artificial neural networks–how to open the black boxes.Application of Artificial Intelligence in Engineering Geodesy, 1(2008), pp. 42-62.

[7] Hametner, C. & Jakubek, S. (2011). Nonlinear Identification with Local Model Networks Using GTLS Techniques & Equality Constraints. *IEEE Trans Neural Networks*, 22(9), pp. 1406-1418.

[8] Barbosa, B. H. G., Aguirre, L. A., Martinez, C. B. & Braga, A. P. (2011). Black and Gray-Box Identification of a Hydraulic Pumping System. *IEEE Trans. Control Systems Technology*, 19(2), pp. 398-406.

[9] Ahmadi, S. S. & Karrari, M. (2011). Nonlinear identification of synchronous generators using a local model approach. *Przeglad Elektrotechniczny (Electrical Review)*, vol. 8, pp. 166-170.

[10] Talmon, R., Kushnir, D., Coifman, R. R., Cohen, I., & Gannot, S. (2012). Parametrization of linear systems using diffusion kernels. *IEEE Transactions on Signal Processing*, 60(3), pp. 1159-1173.

[11] Olvera M. A. G.- & Tang, Y. (2010). Black-Box Identification of a Class of Nonlinear Systems by a Recurrent Neurofuzzy Network. *IEEE Trans Neural Networks*, 21(4), pp. 672-679.

[12] Dong, N. & Chen, Z. (2012). A novel data based control method based upon neural network and simultaneous perturbation stochastic approximation. *Nonlinear Dynamics*, 1(67), pp. 957-963.

[13] Safak, C., Topuz, V. & Baba, A. F. (2010). Pneumatic motor speed control by trajectory tracking fuzzy logic controller. *Sadhana*, 35(1), pp. 75-86.

[14] Rashid, M. T., Frasca, M., Ali, A. A., Ali, R. S., Fortuna, L. & Xibilia, M. G. (2012). Nonlinear model identification for Artemia population motion. Nonlinear Dynamics, 69(4), pp. 2237-2243.

[15] Boëly, N. & Botez, R. M. (2010). New Approach for the Identification and Validation of a Nonlinear F/A-18 Model by Use of Neural Networks. *IEEE Trans Neural Networks*, 21(11), pp. 1759-1765.

[16] Ren, X. & Lv, X. (2011). Identification of Extended Hammerstein Systems Using Dynamic Self-Optimizing Neural Networks, IEEE Trans Neural Networks, vol. 22(8), pp. 1169-1179.

[17] Boëly, N. & Botez, R. M. (2010). New Approach for the Identification and Validation of a Nonlinear F/A-18 Model by Use of Neural Networks. *IEEE Trans Neural Networks*, 21(11), pp. 1759-1765.

[18] Arnerić, J., Poklepović, T., & Aljinović, Z. (2014). GARCH based artificial neural networks in forecasting conditional variance of stock returns. *Croatian Operational Research Review*, 5(2), pp. 329-343.

[19] Beliakov, G., Kelarev, A. & Yearwood, J. (2011). Robust artificial neural networks & outlier detection. Technical report.

[20] Kordos, M., & Rusiecki, A. (2015). Reducing noise impact on MLP training. *Soft Computing*, 1(1), pp. 1-17.

[21] Baruah, M., Misra, A., & Sarma, K. K. (2017). Split FTDNN-DFE equalizer for complex non-linear wireless channels with NARMA approximation. Journal of Intelligent Systems, 26(1), 87-107.

[22] Janczak, A. (2004). Identification of nonlinear systems using neural networks and polynomial models: a block-oriented approach (Vol. 310). Springer Science & Business Media.

[23] Yassin, I. M., Zabidi, A., Salleh, M. K. M. & Khalid, N. E. A. (2013). Malaysian tourism interest forecasting using Nonlinear Auto-Regressive (NAR) model. 2013 IEEE 3rd International Conference on System Engineering & Technology (ICSET), 1(1), pp. 32-36.

[24] Allende, H., Salas, R., Torres, R. & Moraga, C. (2005). Modular Neural Network Applied to Non-Stationary Time Series. Computational Intelligence, Theory and Applications, pp. 585-598.

[25] Nelles, O. (2013). Nonlinear system identification: from classical approaches to neural networks and fuzzy models. Springer Science & Business Media.

[26] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2013). Determining the best forecasting method to estimate unitary charges price indexes of PFI data in central region Peninsular Malaysia. Research in Mathematical Sciences, vol. 1522, no. 1, pp. 1232-1239.

[27] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2014). Best Forecasting Models for Private Financial Initiative Unitary Charges Data of East Coast and Southern Regions in Peninsular Malaysia. International Journal of Economics and Statistics, vol. 2, pp. 119-126

[28] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2014). Comparative Study of Particle Swarm Optimization (PSO) and Firefly Algorithm (FA) on Least Median Squares (LMedS) for Robust Backpropagation Neural Network Learning Algorithm. Australian Journal of Basic and Applied Science, 8(24), pp.117-129.

[29] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2016). The improved BPNN-NAR and BPNN-NARMA models on Malaysian aggregate Price indices with outlying data. Jurnal Teknologi, 78(12-3), pp. 77-83.

[30] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2016). The Superiority of Panel SPSM-KSS Fourier Univariate Unit Root Test towards Problematic PFI Time Series Data. International Journal of Economics and Management Systems, vol. 1, pp. 31-38

[31] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2016). The Superiority of Evolutionary Algorithms to Robustify Backpropagation Neural Network Learning Algorithm. Journal of Applied Environmental and Biological Sciences, 6(25), pp. 17-31.

[32] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2016). The Improved BPNN-NAR and BPNN-NARMA Models on Malaysian Aggregate Price Indices with Outlying Data. Jurnal Teknologi, 78 (11–4), pp. 77-84

[33] Ghani, N. A. M., Kamaruddin, S. B. A., Ramli, N. M., Musirin, I., & Hashim, H. (2017). Modified BPNN via Iterated Least Median Squares, Particle Swarm Optimization and Firefly Algorithm. Indonesian Journal of Electrical Engineering and Computer Science, 8(3), pp. 779-786.

[34] Ghani, N. A. M., Kamaruddin, S. A., Ramli, N. M., Musirin, I., & Hashim, H. (2017). Enhanced BFGS Quasi-Newton Backpropagation Models on MCCI Data. Indonesian Journal of Electrical Engineering and Computer Science, 8(1), 101-106.

[35] Kamaruddin, S. B. A., Tolos, S. M., Hee, P. C., Ghani, N. A. M., Ramli, N. M., Nasir, N. B. M., ... & Huq, M. S. (2017). The quadriceps muscle of knee joint modelling Using Hybrid Particle Swarm Optimization-Neural Network (PSO-NN). Journal of Physics, vol. 819, No. 1, pp. 012-029.

[36] Kamaruddin, S. A., Ghani, N. A. M., & Ramli, N. M. (2018). Consolidated Backpropagation Neural Network for Malaysian Construction Prices Indices Data with Outliers Problem. Pertanika J. Sci. & Technol., 26 (1): 353 – 366.